


SZXXC1450 Sausage Cooking Equipment 香肠水煮线

SLF1450 Secondary Sterilization 二次杀菌冷却风干机
Cooling Air Drying Machine

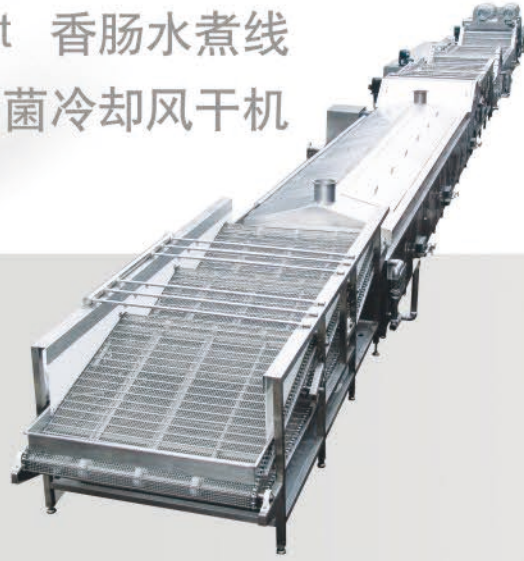

- 蒸汽接入 2寸 0.4MPa 法兰接入；自来水 2寸 螺纹接入
- 二次杀菌冷却风干机分为三个部分：杀菌机+冷却机+风力干燥机：杀菌机对产品、包装容器包装材料、包装辅助物以及包装件等上的微生物进行杀灭，使其降低到允许范围内。杀菌机是用于肉制品果蔬原浆、原汁、浓缩汁、牛奶、果汁饮料或类似产品的连续灭菌工艺。
- 它保护食品，使食品在离开工厂到消费者手中的流通过程中，防止生物的、化学的、物理的外来因素的损害。
- 采用SUS304不锈钢材料，优质网带，符合HACCP卫生标准。杀菌机的主要驱动部件有供料泵，用于传送物料保证设备的安全运行。此机高效节省空间与人员安排，节约加工成本。
- 杀菌时间可为3-50min内任意调节 水温可在83-95℃范围内调节 冷却时间可在5-50min内任意调节 生产中基本保持在4℃左右 风干时间可在5-50min内任意调节 风速在15m/s以上

■ SLF1450

- This set of equipment is divided into three parts: the sterilization machine + cooling machine + Wind dryer. Sterilization machine is used for microorganism on the products, the packaging containers and packaging materials, packaging aids and the products in the package, to make the amount of the microorganism decreased to the permissible range. Sterilization machine for meat, fruit and vegetable puree, juice, juice concentration, milk juice drink or other similar product continuous sterilization process.

GZYD6000II Vacuum Filling Pump
真空灌装地面泵



- 采用SUS304不锈钢材质，独特的外观设计和处理工艺使产品具有非常美观的外形。
- 在真空状态下完成输送，有效防止脂肪氧化，避免蛋白质水解，减少细菌存活，有效地保证产品的保质期及产品的颜色鲜亮，味道纯正。
- 针对较长距离的物料提升输送，简化机器结构，降低生产成本。
- 关键零部件采用进口材料经加工中心制造，确保机器精度。泵体、叶轮、叶片采用特殊处理工艺，光洁度高，耐磨性好，便于清洗。
- 真空泵、电器元件采用进口名牌产品，真空度可达-0.1MPa。

- Use SUS304 stainless steel, unique design and perfect surface processing technology.
- Working with vacuum, avoid oxidation and proteolysis, reduce bacteria survival, guaranteed long preserved life, good color and pure taste.
- For long distance transport stuffings material, like mooncake stuffings, simplify structure and reduce production cost.
- Key parts adopt imported material, processed by numerical control center, make sure the precision.
- The rotor, vanes, wheel, use special heat-treatment processing, highly smooth surface, abrasion proof, easily clean. Vacuum pump, electric parts use imported famous brand. vacuum degree can reach -0.1MPa.

| 型号 Type | 外形尺寸(mm) External Dimension | 电压 Voltage | 总功率(kw) Power | 生产能力 Capacity | 压缩空气压 Pressure |
|------------|--------------------------------|---------------|------------------|------------------|-------------------|
| SZXXC1450 | 3200X1240X2150 | 3相380V 50HZ | 36 | 2000kg/h | 0.4PNa φ6 PU管 |
| SLF1450 | 1850X1450X2150 | 3相380V 50HZ | 32 | 1000kg/h | |

| 型号 Type | 外形尺寸(mm) External Dimension | 电压 Voltage | 总功率(kw) Power | 料斗容积(L) Volume | 真空度(MPa) Vacuum | 直灌能力(kg/h) Filling Capacity | 重量(kg) Weight |
|------------|--------------------------------|---------------|------------------|-------------------|--------------------|--------------------------------|------------------|
| GZYD6000II | 1440X1100X1390 | 3相380V 50HZ | 9 | 220 | -0.1 | 6000 | 760 |