


BNS SERIES NUT SPLITTER

WORKING RANGE: 5-90T
 BOLT RANGE: M8-M48
 MAX. PRESSURE: 700bar



FEATURES AND BENEFITS

- Compact and easy to use
- Single acting, spring return cylinder for fast blade retraction
- Easy to replace blade
- Angled head design for increased clearance

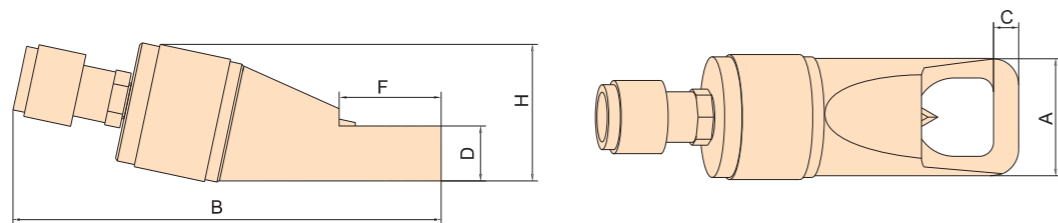

Model	Nuts Range	Bolt Range	Capacity	Oil Capacity	Size						Weight
					A	B	C	D	E	F	
	mm	mm	ton	cm ³	mm	mm	mm	mm	mm	mm	kg
BNS-001	12-19	M8-M12	5	15	40	190	10.5	19	30	48	1.2
BNS-002	19-24	M12-M16	10	20	53	215	12.5	25	42	62	2.0
BNS-003	27-34	M18-M22	15	60	66	245	15.5	30	54	80	3.2
BNS-004	35-41	M22-M27	20	80	75	285	17.0	36	66	92	5.0
BNS-005	46-51	M27-M33	35	155	93	340	25.0	43	80	110	9.0
BNS-006	51-60	M33-M39	50	240	106	370	26.5	52	98	128	13.9
BNS-007	60-75	M39-M48	90	492	156	450	35.0	70	117	190	35.0

BNC SERIES NUT SPLITTER

WORKING RANGE: 103-193T
 BOLT RANGE: M45-M90
 MAX. PRESSURE: 700bar




Blade Cutting Depth Scale

Adjustable cutting depth scale for controlled blade extension, which avoids damage to bolt threads. The scale indicates the bolt range in metric and imperial values on each cutting head.

FEATURES AND BENEFITS

- Specially designed to suit standard ANSI B16.5/BS1560 flanges.
- Single-acting (spring return) or double-acting cylinder.
- Tri-blade technology provides three cutting surfaces on a single blade.
- Interchangeable heads provide maximum nut range flexibility.
- Preset scale allows controlled blade extension, which avoids damage to bolt threads.
- Grip tape and handle included for more secure manoeuvrability.
- Nickel-plated cylinder body for excellent corrosion protection and improved durability in harsh environments.
- Internal Pressure Relief Valve for overload protection.

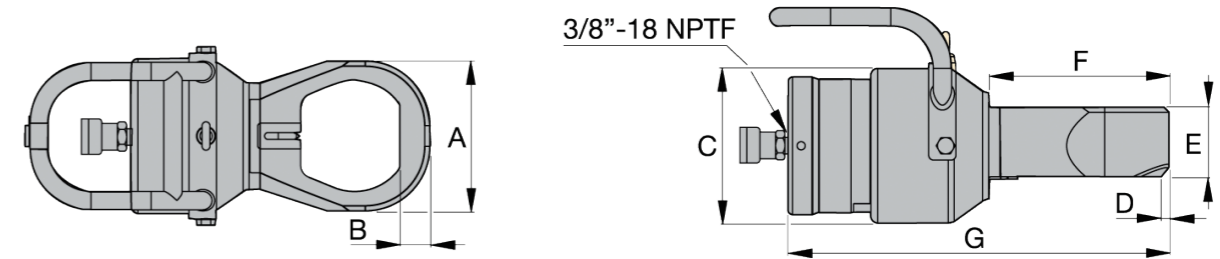

Model	But Size	Bolt Size	Capacity	Oil Capacity	Size							Weight
					A	B	C	D	E	F	G	
	mm	mm	ton	cm ³	mm	mm	mm	mm	mm	mm	mm	kg
BNC-001	70-80	M45-M52	103	377	132	28	180	8.0	81	186	412	37
BNC-002	70-85	M45-M56	103	377	145	30	180	8.0	81	196	422	37
BNC-003	70-95	M45-M64	103	377	160	32	180	8.0	81	201	432	38.5
BNC-004	70-105	M45-M72	103	377	174	35	180	9.0	81	209	443	39.5
BNC-005	110-115	M76-M80	193	819	189	36	234	3.7	111	234	472	69
BNC-006	110-130	M76-M90	193	819	219	41	234	2.5	111	242	493	71.5