


## 6 Port 698-960 and 1710-2690MHz Panel Antenna

Electrical specifications		
Frequency Range (MHz)	698-960	1710-2690*2
Polarization	±45	
Gain(dBi)	15	17.5
Horizontal Beam width(°)	45	45
Vertical Beam width(°)	13	8
Electrical Down tilt (°)	4-14	2-12
Electrical Down tilt Deviation(°)	±1	
1st Upper Side-lobe Suppression(dB)	≤-16	
Front-To-Back Ratio,180°±30°(dB)	≥25	≥25
Cross-polar Discrimination@0°(dB)	≥15	
Maximum Power per Port(W)	250	
VSWR	≤1.5	
Isolation (dB)	26	
Intermodulation IM3(dBc)	≤-150(@2*43dBm)	
Impedance(Ω)	50	
Lightning Protection	DC Ground	

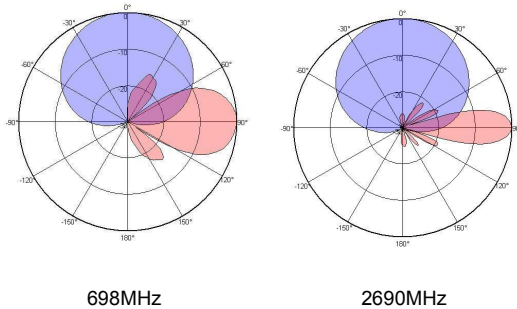

Mechanical specifications	
Antenna size(mm)	1500×416×164
Packing size(mm)	1750×520×270
Antenna weight(kg)	23.5
Mounting weigh(kg)	5.4
Packing weigh(kg)	32
Connector	6*7/16DIN-Female
Connector Location	Bottom
Radome Material	UPVC
Radome Color	Gray
Operating Temperature(°C)	-40~65
Operating Humidity(%)	≤95
Wind resistance(km/h)	210
Waterproof	IP65