




参数一览

Model (型号)	GH-B8024-606	GH-B8024-312	GH-B8024-306
Dimensions (尺寸)	597x597x80mm	1197x297x80mm	597x297x80mm
Luminous flux (光通量)	3700-4000lm		5000-5500lm
Mounting (安装方式)	嵌入安装/吊装		嵌入安装/吊装
Class (安全等级)	Class I		Class I
IP rating (防护等级)	IP20		IP20
Power consumption (功率)	37W		50W
Power factor (功率因数)	>0.9		>0.9
lm/W (光效)	100-110lm/W		100-110lm/W
CRI (显色性)	>80		>80
CCT (色温)	3000K / 4000K / 6500K		3000K / 4000K / 6500K
Lifetime (光通量维持率)	50000 小时 L70 B50		50000 小时 L70 B50
Operating Temperature (工作温度)	0°C-35°C		0°C-35°C



光源





标准

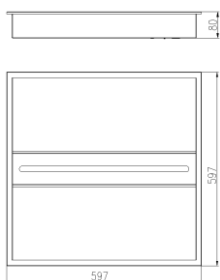

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

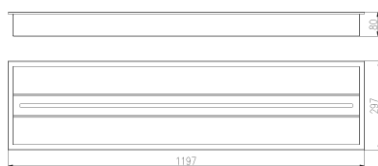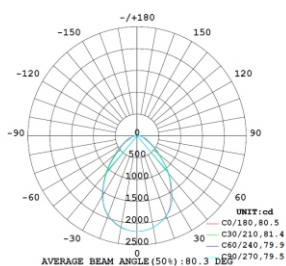

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

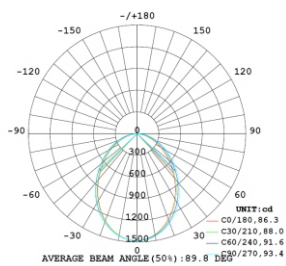

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

