



LED Canopy Light

CP01



130
lm/W

www.ofled-lighting.en.alibaba.com

- High efficiency, available. 130lm/w
- Integrated die-casting aluminum housing, elegant appearance
- Good heat dissipation, long lifespan
- IP65



Jiangsu Ofled Optoelectronics Technology Co.,Ltd

Factory address: No.9 Zhengfu Road Liangduo Town,Dongtai CityJiangsu Province,P.R. China.
Tel: +86 515 85555809

Shenzhen Office: 446, Huafeng Internet+Creative Garden, No.107 of Gonghe Industrial Road, Xixiang Street, Bao'an District, Shenzhen, China.
Tel: +86 755 23777180

Email: sales@ofled-lighting.com Web: www.ofled-lighting.com www.ofled-lighting.en.alibaba.com




www.ofled-lighting.com

Application

Petrol station, canopy ; Airport, supermarket, booth ; Train station, lobby ; Industry, shopping mall, indoor parking ; Park, villa, Indoor tennis ground





Lighting Distribution Curve

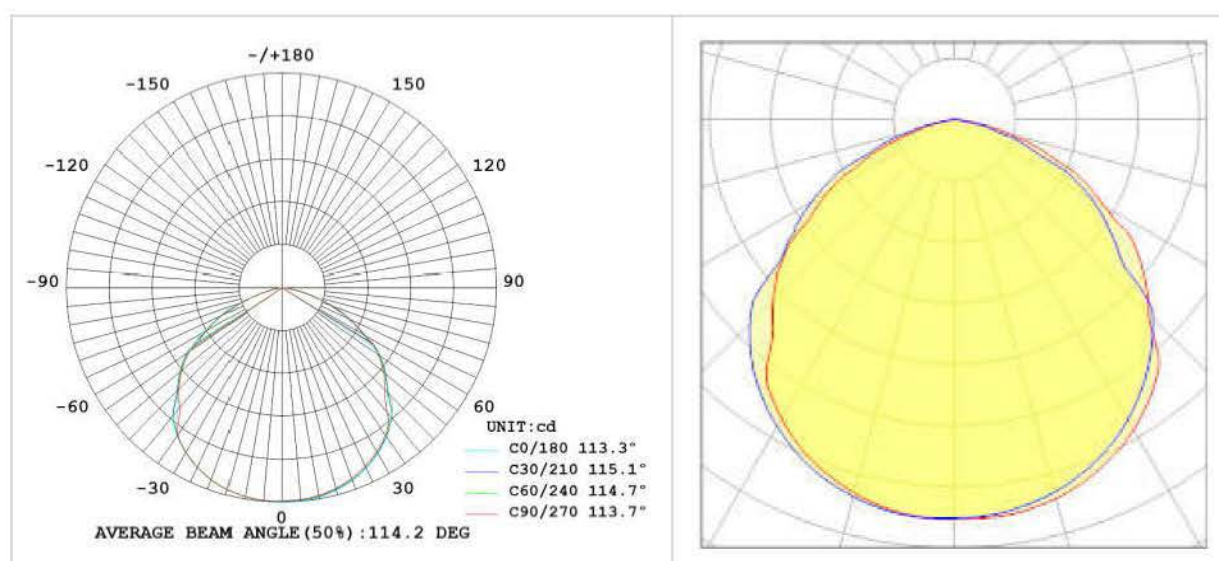

Specification



SKU	OHD-CP01-80	OHD-CP01-100	OHD-CP01-120	OHD-CP01-150	OHD-CP01-200
Watts	80W	100W	120W	150W	200W
Luminous Flux (Test data by 5000K)	10400lm	13000lm	15600lm	19500lm	26000lm
Luminous Efficiency	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
Input Voltage	100-240 VAC 100-277 VAC	100-240 VAC 100-277 VAC	100-240 VAC 100-277 VAC	100-240 VAC 100-277 VAC	100-240 VAC 100-277 VAC
CCT	4000K-5700K	4000K-5700K	4000K-5700K	4000K-5700K	4000K-5700K
CRI	Ra>70	Ra>70	Ra>70	Ra>70	Ra>70
LED Type	3030	3030	3030	3030	3030
Housing Color	white	white	white	white	white
IP Grade	IP65	IP65	IP65	IP65	IP65
Material	Aluminum and Glass	Aluminum and Glass	Aluminum and Glass	Aluminum and Glass	Aluminum and Glass
Working Environment	-30℃ ~ +50℃ 10%~90% RH	-30℃ ~ +50℃ 10%~90% RH	-30℃ ~ +50℃ 10%~90% RH	-30℃ ~ +50℃ 10%~90% RH	-30℃ ~ +50℃ 10%~90% RH
Beam angle	110°	110°	110°	110°	110°
Lifespan	>50000 hrs(LM80)	>50000 hrs(LM80)	>50000 hrs(LM80)	>50000 hrs(LM80)	>50000 hrs(LM80)
Warranty	5 years	5 years	5 years	5 years	5 years

Dimension(unit:mm)

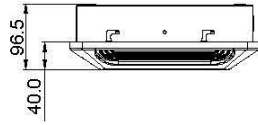
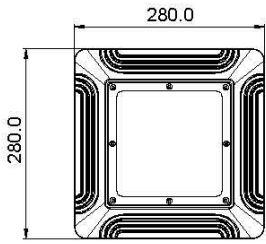


280*280*96.5mm

80W / 100W / 120W


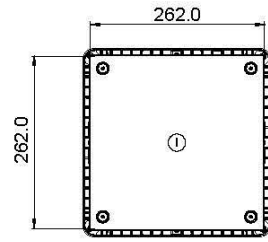


Cut-out size:
L262*W262mm

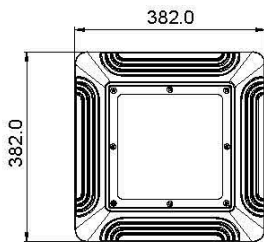

382*382*96.5mm

150W / 200W

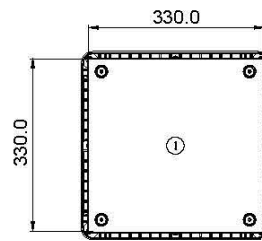

Cut-out size:
L330*W330mm

Packing Image

