




LED Street Light

FLSL03-03



 www.ofled-lighting.en.alibaba.com

130-150
lm/W

- Light Efficacy up 130-150lm/W.
- Input Voltage: 100-240/277Vac or 200-240Vac 50/60Hz.
- 5 years warranty.
- Option: Non-Dimming,
Dimming, DALI
Daylight Sensor



Jiangsu Ofled Optoelectronics Technology Co.,Ltd

Factory address: No.9 Zhengfu Road Liangduo Town, Dongtai City Jiangsu Province, P.R. China.
Tel: +86 515 85555809

Shenzhen Office: A529, Huafeng Internet+ Creative Garden, No.107 of Gonghe
Industrial Road, Xixiang Street, Bao'an District, Shenzhen, China.
Tel: +86 755 23079183

Email: sales@ofled-lighting.com Web: www.ofled-lighting.com www.ofled-lighting.en.alibaba.com




www.ofled-lighting.com

Specifications


Item No.	Watt(W)	Product Size(mm)	Combination scheme	Light Efficiency (lm/W)	Input	Option	CCT (K)
OHD-FLSL03-03-50	50	430*360*90	1*1	130-150	100-240/277Vac 200-240Vac 50/60Hz	No 0-10V DALI Daylight	2700- 6500
OHD-FLSL03-03-60	60						
OHD-FLSL03-03-50	100	630*360*90	1*2				
OHD-FLSL03-03-120	120						
OHD-FLSL03-03-150	150	720*360*90	1*3				
OHD-FLSL03-03-180	180						
OHD-FLSL03-03-200	200	810*360*90	1*4				
OHD-FLSL03-03-250	250						
OHD-FLSL03-03-250	250	900*360*90	1*5				
OHD-FLSL03-03-300	300						
OHD-FLSL03-03-300	300	990*360*90	1*6				

CRI (Ra)	PF	Beam Angle	LED Type	Protection Grade	Warranty
>70	0.95	30° 60° 90° 110° 145°x70°	3030 / 5050	IP65	5 years


Distribute curve and illuminance distribute curve




30°




60°



90°





110°



145°x70°

Dimension

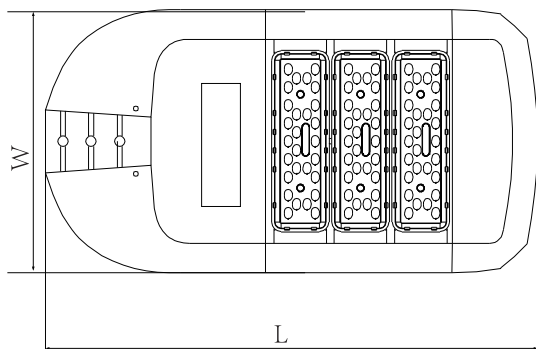

Item No.	L(mm)	W(mm)	H(mm)
OHD-FLSL03-03-50	430	360	90
OHD-FLSL03-03-60			
OHD-FLSL03-03-100	630	360	90
OHD-FLSL03-03-120			
OHD-FLSL03-03-150	720	360	90
OHD-FLSL03-03-180			
OHD-FLSL03-03-200	810	360	90
OHD-FLSL03-03-250			
OHD-FLSL03-03-250	900	360	90
OHD-FLSL03-03-300			
OHD-FLSL03-03-300	990	360	90



Smart Lighting Solution




Fire Lighting



Incandescent
& HPS Lighting




LED Lighting

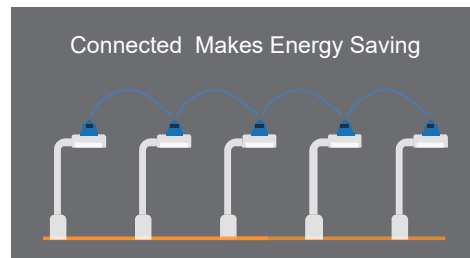

IOT + LED Lighting


Overview-Lorawan

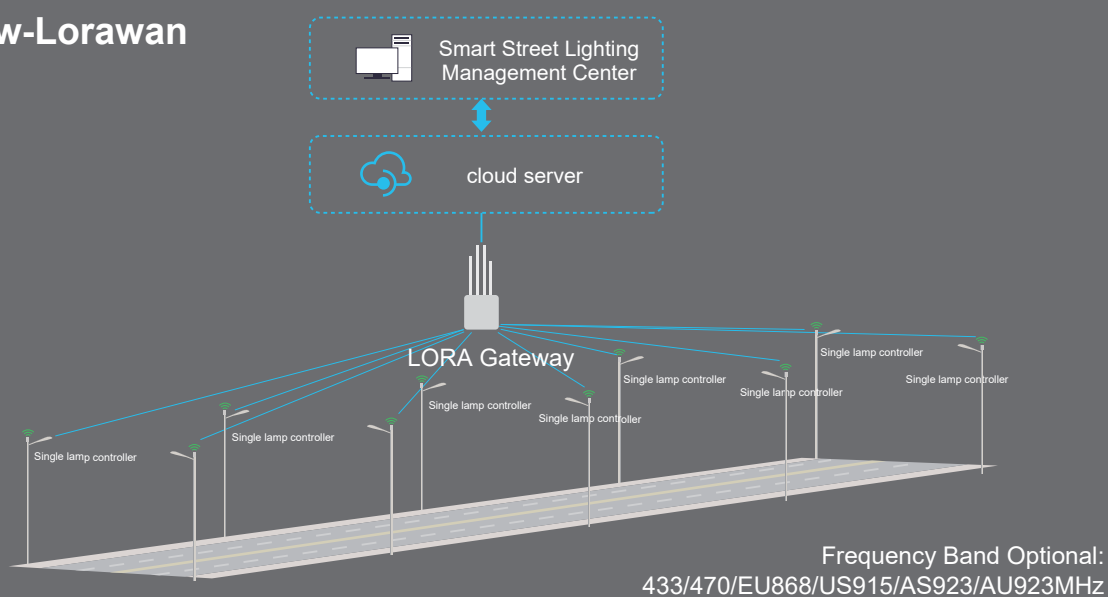

Overview-Cat1/Cat4




Single controller
inserted local 4G sim card

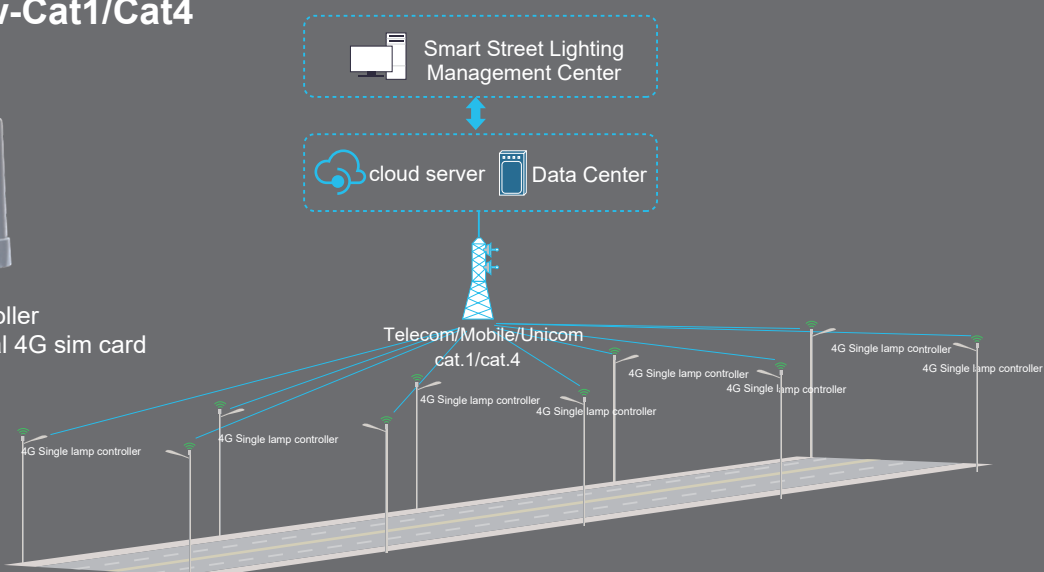


Installation guide

- The following only for installation diagram, light pole height and installation, appropriate adjustments can be made according to the demand.

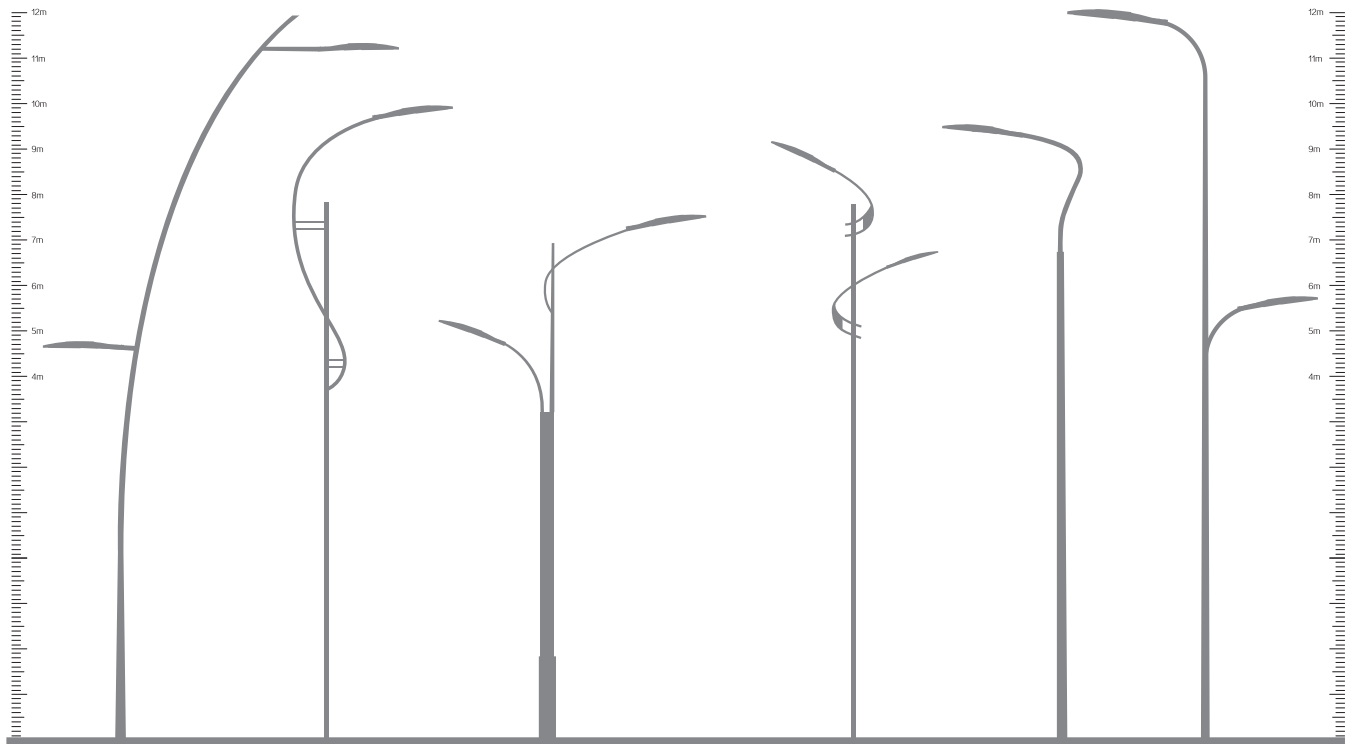

Accessories





OHD-PFS-LPD01
Daylight sensor



OHD-PFS-LPD02
Lightning protection device
10KA

Application



- The products are widely used in urban roads, rural roads, community roads and other places that need street lighting.