




LED Linear High Bay Light

HBMS01

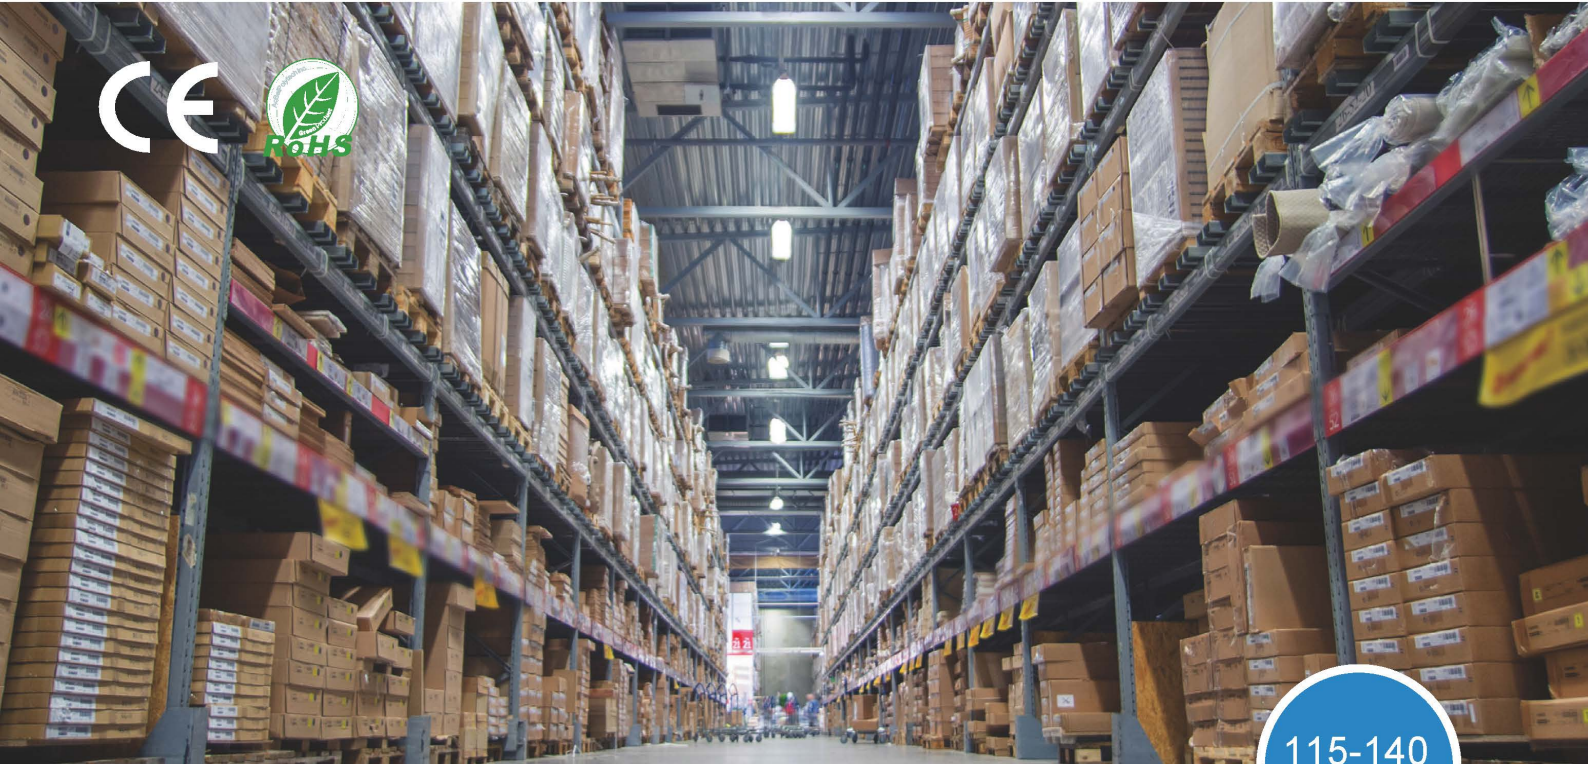

 www.ofled-lighting.en.alibaba.com

115-140
lm/W

- Light Efficacy up to 115-140Lm/W
- Input Voltage: 100-240VAC or 100-277VAC
- 5 years warranty.
- Option: Non-Dimming,
Dimming(1-10V or DALI) ,
Microwave Sensor, PIR sensor



Microwave Sensor

Jiangsu Ofled Optoelectronics Technology Co.,Ltd

Factory address: No.9 Zhengfu Road Liangduo Town, Dongtai City Jiangsu Province, P.R. China.
Tel: +86 515 85555809

Shenzhen Office: 446, Huafeng Internet+Creative Garden, No.107 of Gonghe Industrial Road, Xixiang Street, Bao'an District, Shenzhen, China.
Tel: +86 755 23777180

Email: sales@ofled-lighting.com Web: www.ofled-lighting.com www.ofled-lighting.en.alibaba.com



www.ofled-lighting.com

Specifications

| Item No. | Watt(W) | Product Size(mm) | Combination scheme | Light Efficiency (lm/W) | Input | Option | CCT (K) | CRI (Ra) |
|------------|---------|-----------------------------|--------------------|-------------------------|---|--|-----------|----------|
| HBMS01-60 | 60 | 335*140*115 | 1*1 | 115-140 | 100-240/277Vac 200-240Vac 50/60Hz | 0/1-10V DALI Microwave Sensor PIR sensor bluetooth Optional | 3000-6500 | 70/80 |
| HBMS01-90 | 90 | 635*140*115 | 1*2 | | | | | |
| HBMS01-100 | 100 | 635*140*115 | 1*2 | | | | | |
| HBMS01-120 | 120 | 635*140*115 | 1*2 | | | | | |
| HBMS01-150 | 150 | 635*140*115/ 935*140*115 | 1*2 / 1*3 | | | | | |
| HBMS01-180 | 180 | 935*140*115 | 1*3 | | | | | |
| HBMS01-200 | 200 | 1235*140*115 | 1*4 | | | | | |
| HBMS01-240 | 240 | 1235*140*115 | 1*4 | | | | | |
| HBMS01-300 | 300 | 1235*140*115 | 1*4 | | | | | |

| PF | Beam Angle | LED Type | Driver Brand | Protection Grade | Working Temperature | Storing Temperature |
|------|--|----------|---|------------------|---------------------|---------------------|
| >0.9 | 30° / 90° /120° / 30°x70° / 135°x75° / 150°x75° | 3030 | MEANWELL OR SOSEN OR ZHI HE OR OTHERS BRAND | IP65 | -20℃ ~+50℃ | -20℃ ~+80℃ |

Accessories



OHD-PMS-SC
Hanging buckle+Suspension chains



OHD-PMS-WB01
Ceiling wall bracket



OHD-PMS-WB02
Ceiling wall
adjustable bracket




OHD-PA-MS01
IP65 Microwave sensor
Outside



Microwave sensor
interior


Distribute curve and illuminance distribute curve

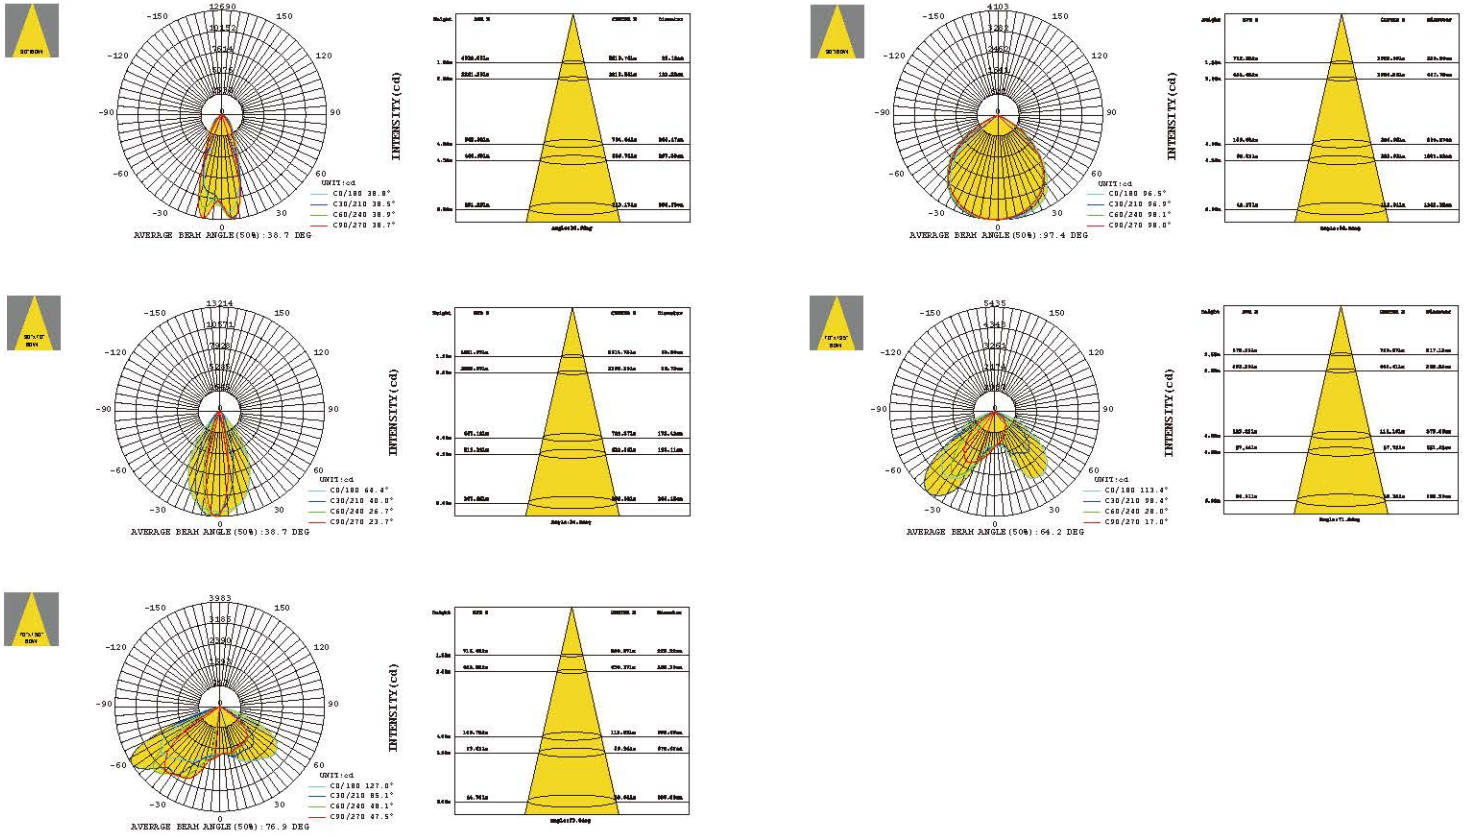


Dimension

| Item No. | Array | Product size |
|----------------|---------|---------------------------------|
| OHD-HBMS01-60 | 1*1 | 335*140*115mm |
| OHD-HBMS01-90 | 1*2 | 635*140*115mm |
| OHD-HBMS01-100 | 1*2 | 635*140*115mm |
| OHD-HBMS01-120 | 1*2 | 635*140*115mm |
| OHD-HBMS01-150 | 1*2/1*3 | 635*140*115mm/ 935*140*115mm |
| OHD-HBMS01-180 | 1*3 | 935*140*115mm |
| OHD-HBMS01-200 | 1*4 | 1235*140*115mm |
| OHD-HBMS01-240 | 1*4 | 1235*140*115mm |
| OHD-HBMS01-300 | 1*4 | 1235*140*115mm |


- There will be slight deviation in the actual situation, which is subject to the actual situation.

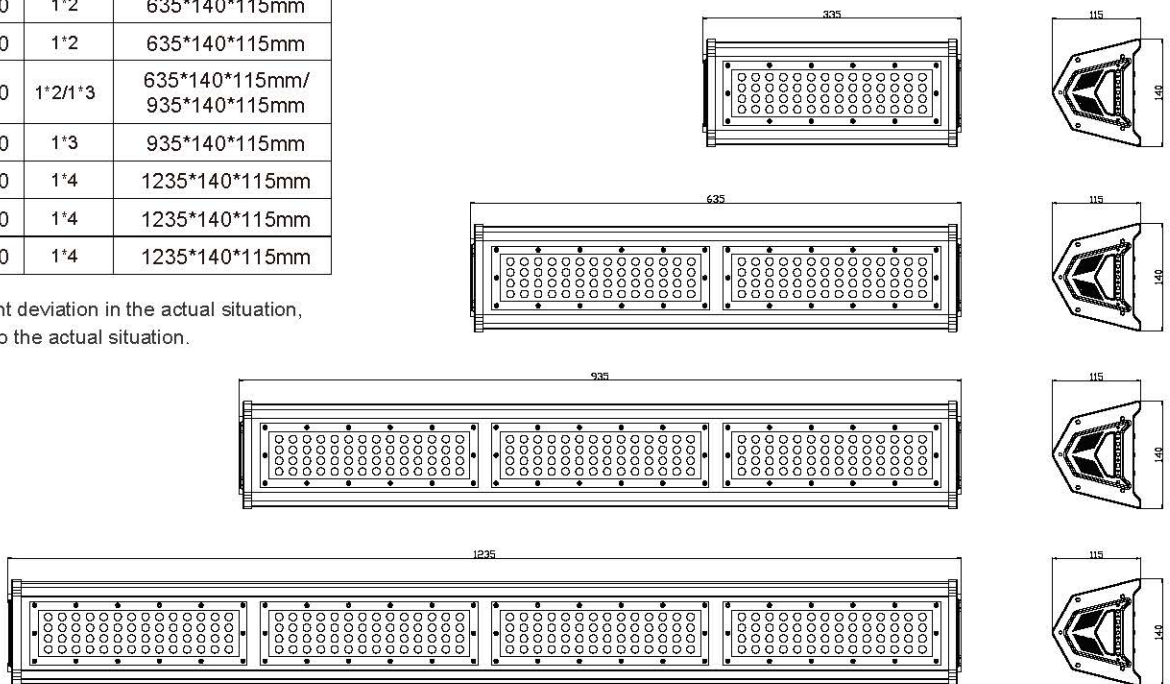


Application

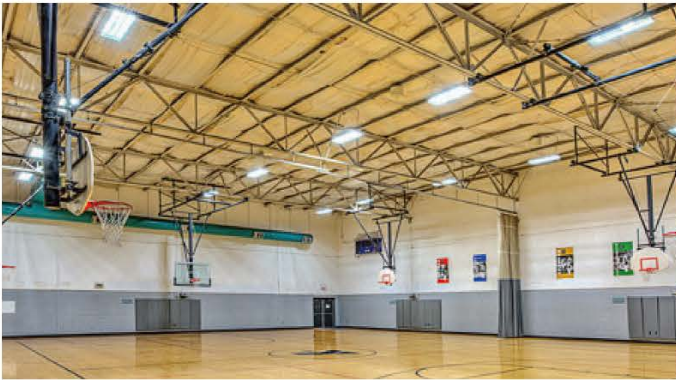


Installation guide



Ground Installation



Ceiling Mounted



Wall Mounted



Suspended Installation