




LED Linear High Bay Light


HBMS03

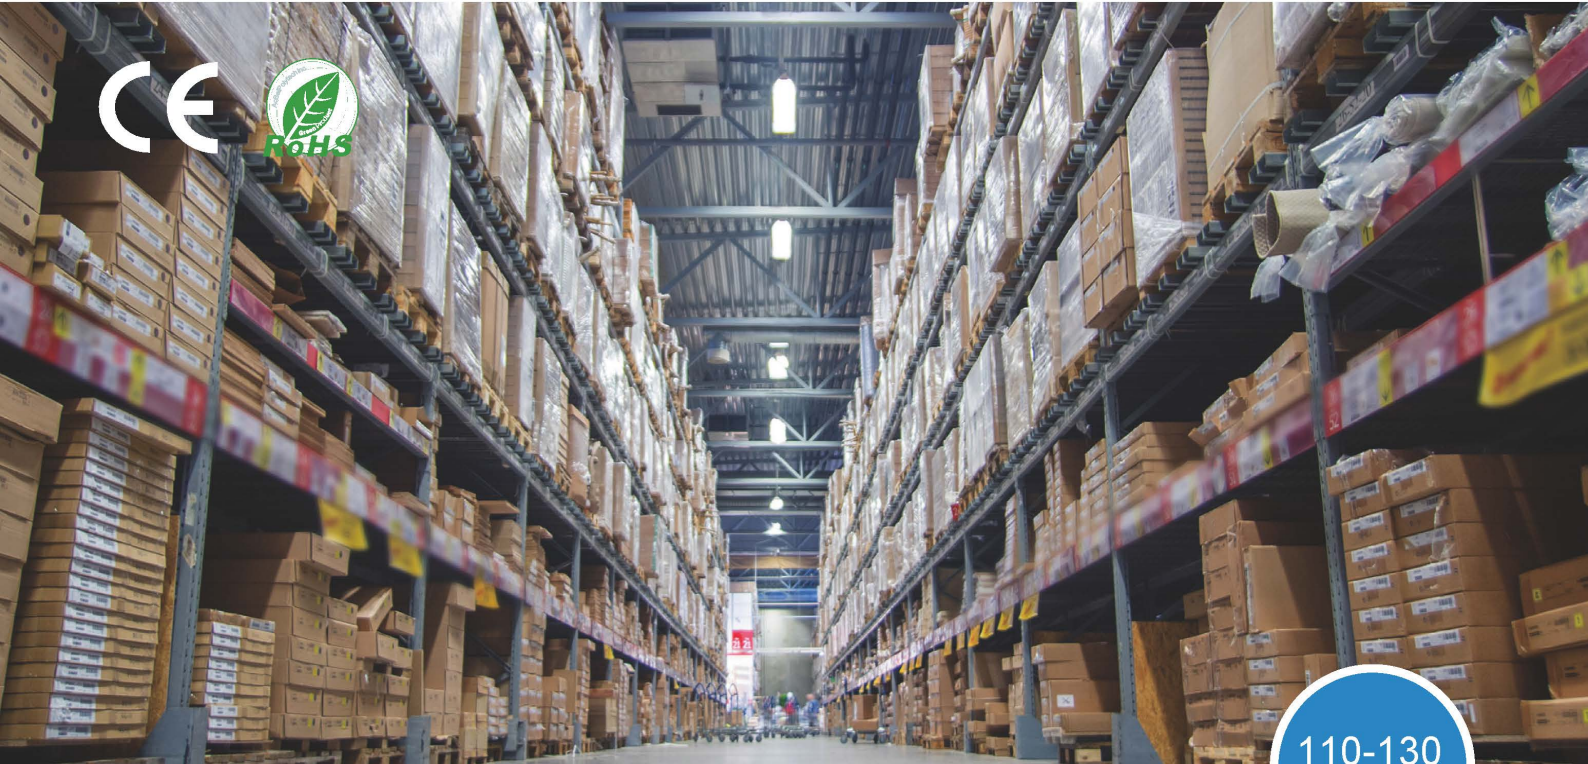

www.ofled-lighting.en.alibaba.com

110-130
lm/W

- Light Efficacy up to 120-130Lm/W
- Input Voltage: 100-240/277VAC or 200-240VAC
- 3-5 years warranty.
- Option: Non-Dimming,
Dimming(1-10V or DALI) ,
Microwave Sensor, PIR sensor
Bluetooth, Optional

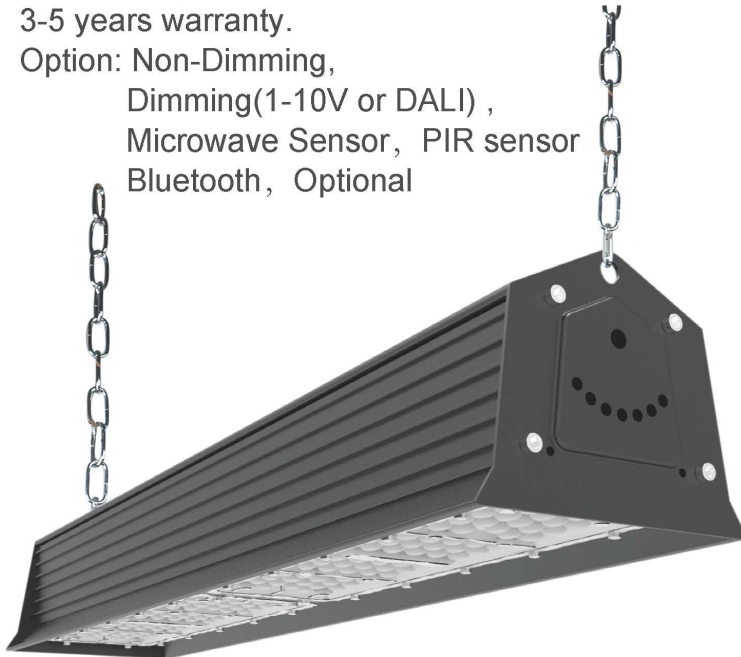

Microwave Sensor

Jiangsu Ofled Optoelectronics Technology Co.,Ltd

Factory address: No.9 Zhengfu Road Liangduo Town,Dongtai CityJiangsu Province,P.R. China.
Tel: +86 515 85555809

Shenzhen Office: 446, Huafeng Internet+Creative Garden, No.107 of Gonghe
Industrial Road, Xixiang Street, Bao'an District, Shenzhen, China.
Tel: +86 755 23777180

Email: sales@ofled-lighting.com Web: www.ofled-lighting.com www.ofled-lighting.en.alibaba.com



www.ofled-lighting.com

Specifications

Item No.	Watt(W)	Product Size(mm)	Combination scheme	Light Efficiency (lm/W)	Input	Option	CCT (K)	CRI (Ra)
HBMS03-50	50	265*110*90	1*1	120-130	100-240/277Vac or 200-240Vac 50/60Hz	0/1-10V DALI Microwave Sensor PIR sensor bluetooth Optional	3000-6500	70+
HBMS03-60	60	265*110*90	1*1					
HBMS03-100	100	510*110*90	1*2					
HBMS03-120	120	510*110*90	1*2					
HBMS03-150	150	755*110*90	1*3					
HBMS03-180	180	755*110*90	1*3					
HBMS03-200	200	755*110*90	1*3					
HBMS03-200	200	1000*110*90	1*4					
HBMS03-240	240	1000*110*90	1*4					

PF	Beam Angle	LED Type	Driver Brand	Protection Grade	Working Temperature	Storing Temperature
0.95	30° / 60° / 90° / 110° / 70°x145° / 75°x165°	3030	ZHI HE OR OTHERS BRAND	IP65	-20℃~+40℃	-20℃~+80℃

Accessories



OHD-PMS-SC
Hanging buckle+Suspension chains



OHD-PMS-WB01
Ceiling wall bracket




OHD-PMS-WB02
Ceiling wall
adjustable bracket




Microwave sensor
interior


Installation guide

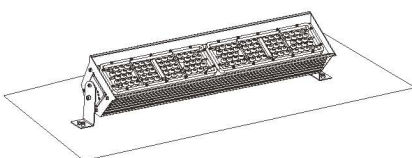

Ground Installation

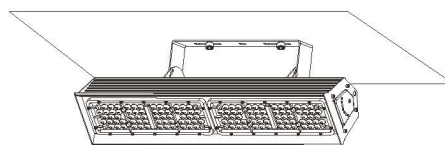


Ceiling Mounted



Suspended Installation

Dimension

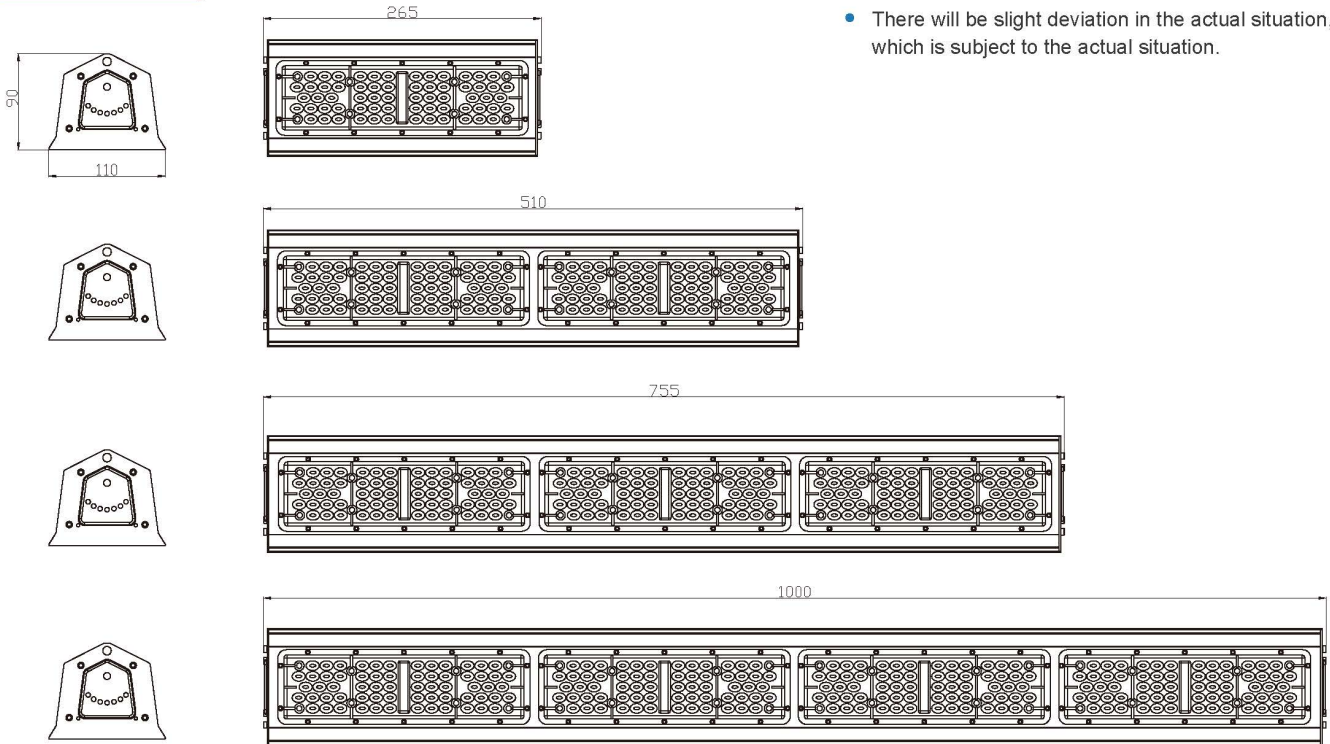

Application

Products can be used in warehouses, tunnels, indoor swimming venues, factories, supermarkets

