

▶ LED Street Light




FL5L03-01




- Light Efficacy up 130-150lm/W.
- Input Voltage: 100-240/277Vac or 200-240Vac 50/60Hz.
- 5 years warranty.
- Option: Non-Dimming,
Dimming, DALI
Daylight Sensor



Product Dimensions

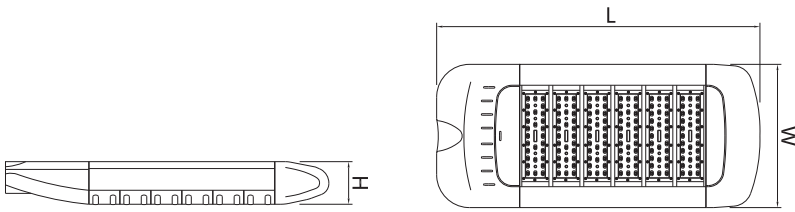

Light Distribution Optional

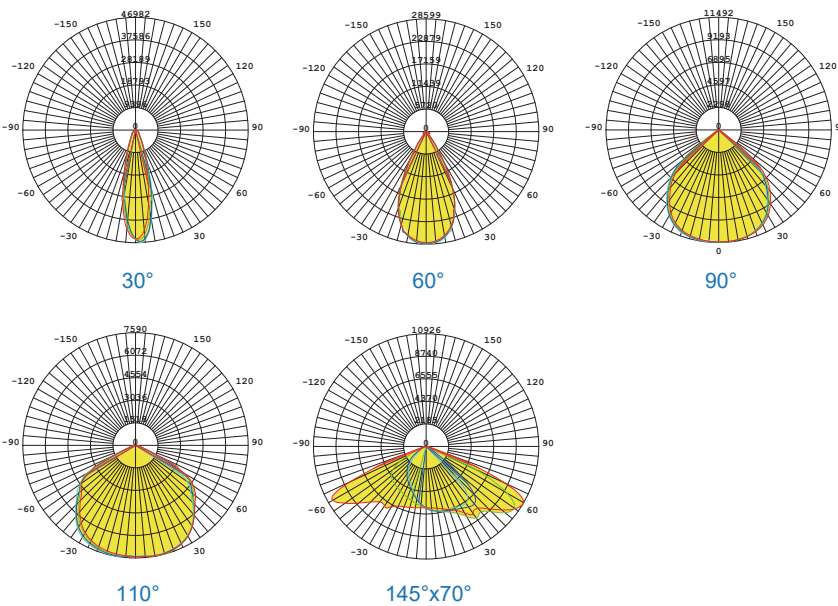

Product Parameters

Series	Watt(W)	Input	Light Efficiency (lm/W)	CCT	Beam Angle	PF	CRI	Product Size(mm)
FLSL03-01	50	100-240/277Vac or 200-240Vac 50/60Hz	130-150lm/W	2700K- 6500K	30° 60° 90° 110° 145°x70°	0.95	>70	435*370*110
	60							435*370*110
	100							515*370*110
	120							515*370*110
	150							595*370*110
	180							595*370*110
	200							675*370*110
	250							755*370*110
	300							835*370*110

SMART LIGHTING SOLUTION




Fire Lighting



Incandescent & HPS Lighting




LED Lighting

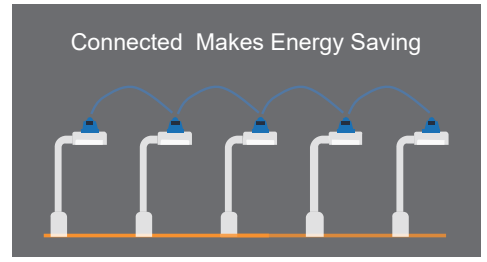

IOT + LED Lighting


Overview-Lorawan

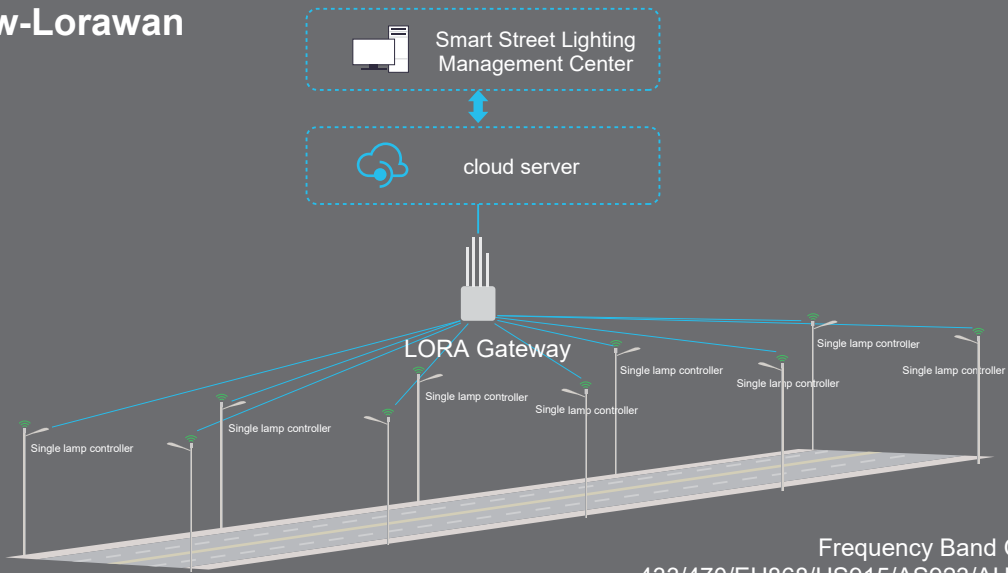

Overview-Cat1/Cat4




Single controller
inserted local 4G sim card

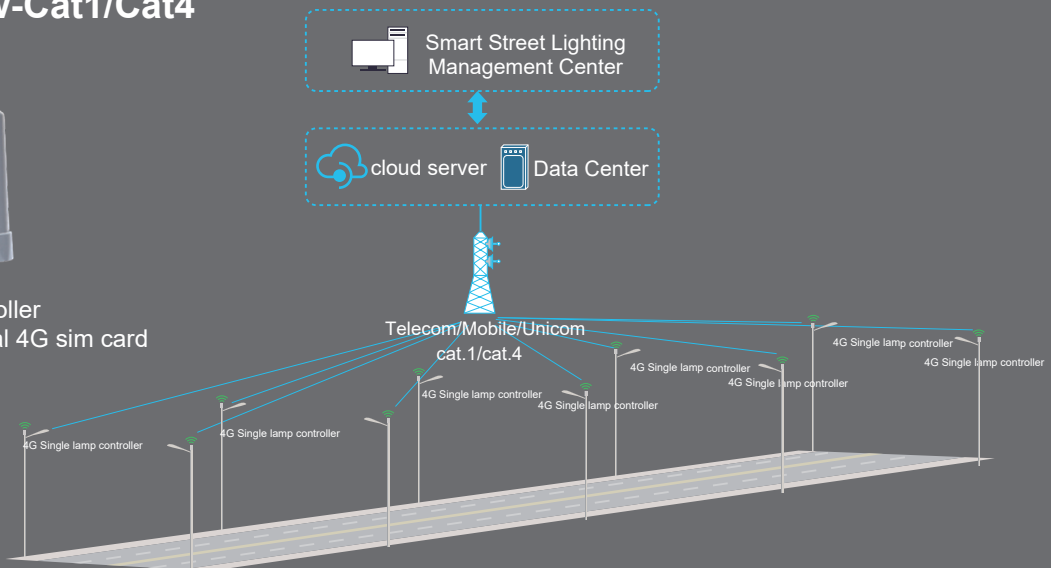

INSTALLATION GUIDE

- The following only for installation diagram, light pole height and installation, appropriate adjustments can be made according to the demand.

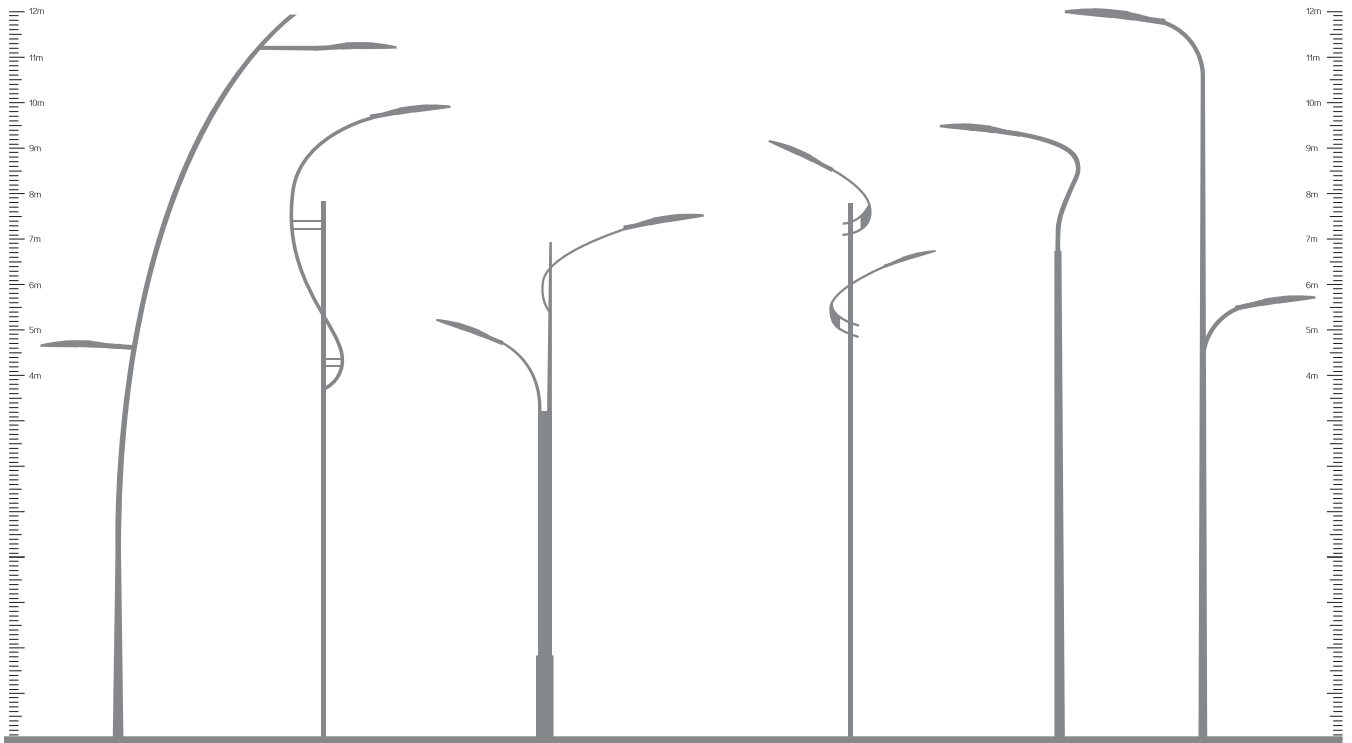

ACCESSORIES




OHD-PFS-LPD01
Daylight sensor



OHD-PFS-LPD02
Lightning protection device
10KA

APPLICATION

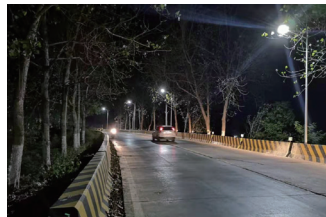

- The products are widely used in urban roads, rural roads, community roads and other places that need street lighting.