

# ▶ LED Street Light




**FLSSL03-02**




- Light Efficacy up 130-150lm/W.
- Input Voltage: 100-240/277Vac or 200-240Vac 50/60Hz.
- 5 years warranty.
- Option: Non-Dimming,  
Dimming, DALI  
Daylight Sensor



## ▶ Product Dimensions

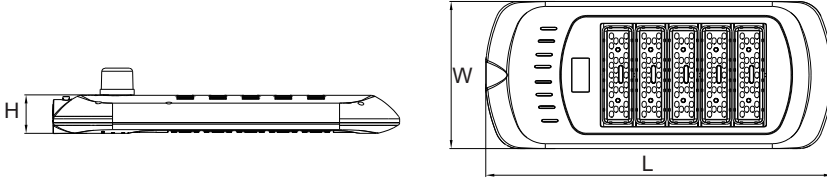

## ▶ Light Distribution Optional

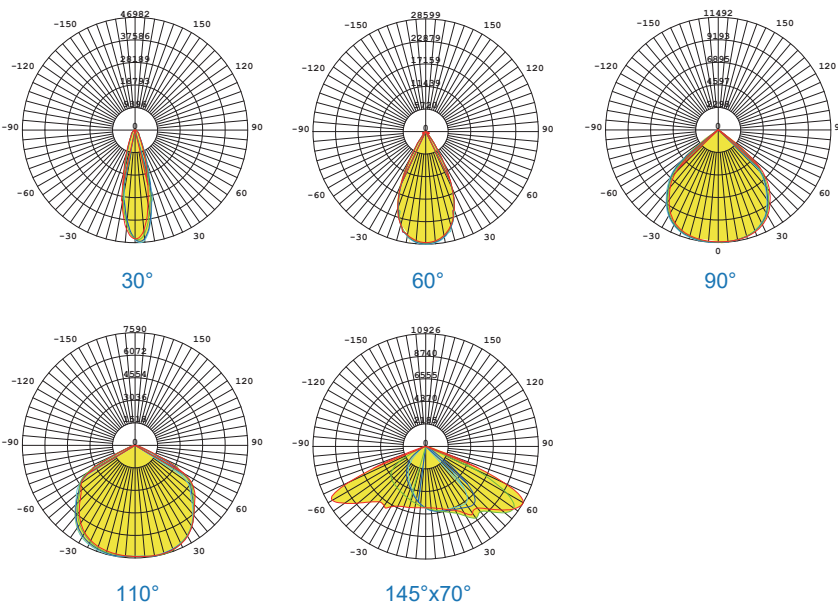

## ▶ Product Parameters

Series	Watt(W)	Input	Light Efficiency (lm/W)	CCT	Beam Angle	PF	CRI	Product Size(mm)
FLSL03-02	100	100-240/277Vac or 200-240Vac 50/60Hz	130-150lm/W	2700K- 6500K	30° 60° 90° 110° 145°x70°	0.95	>70	700*362*95
	150							
	180							
	200							
	250							853*362*95
300								



## INSTALLATION GUIDE

- The following only for installation diagram, light pole height and installation, appropriate adjustments can be made according to the demand.



## ACCESSORIES




OHD-PFS-LPD01  
Daylight sensor



OHD-PFS-LPD02  
Lightning protection device  
10KA

## APPLICATION

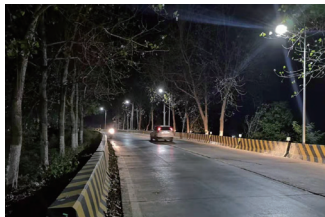

- The products are widely used in urban roads, rural roads, community roads and other places that need street lighting.