


Low PIM Termination

FZ0727-100 DB(7/16)

- ✓ Wide-band design, cover 698-2700MHz
- ✓ Low PIM
- ✓ Compact size, light weight

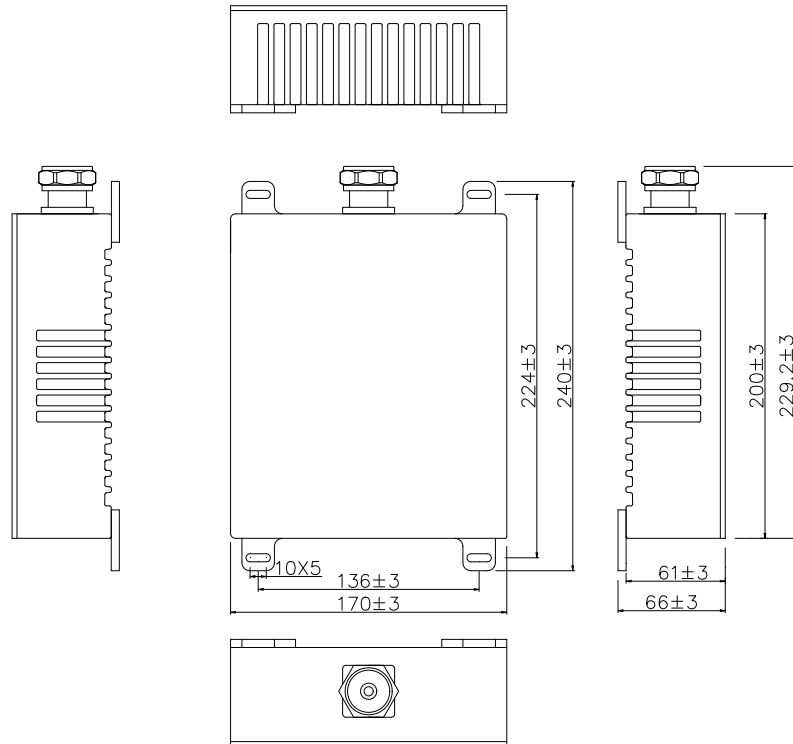

Electrical Specifications:

Model Name	FZ0727-100 DB(7/16)
Frequency Range (MHz)	698-2700
VSWR	≤ 1.25
PIM(dBc)	≤ -150@2 × +43dBm
Impedance(Ω)	50
Power Handling(W)	100,Avg

Mechanical Specifications:

Dimensions(excluding connectors and mounting bracke) (mm)	250*170*66
Weight (including connectors and mounting bracket) (kg)	2
Connector Type	7/16,DIN Male
Color	Black
Operational Temperature (°C)	-40 to +60
Operational Humidity (%)	≤ 95
Ingress Protection Class	IP40(Indoor)