


Fiberglass Omni Antenna OO0896-11360

Features:

- Elegant appearance, simple installation, stable performance.
- Fit for indoor & Outdoor Wall mounted.
- Fiberglass Radome Good performance in anti-vibration and resistant to aging.
- All Weather Operation
- Stable Steel Installation Kit

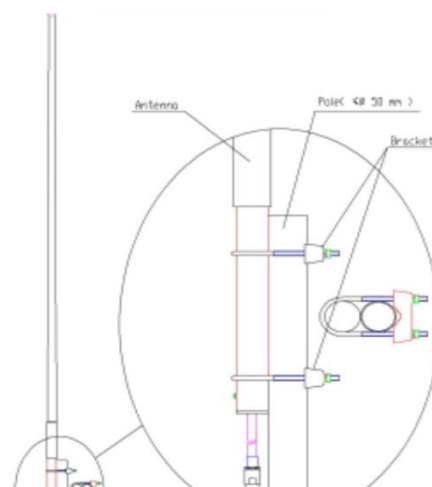

Technical Specification:

Frequency 806 ~ 960MHz

Bandwidth 154 MHz

Gain 10.5 dBi

VSWR ≤ 1.5

Max power 100 W

Impedance 50 Ω

Polarization Vertical

Horizontal Beamwidth 360°

Vertical Beamwidth 10.2°

Front to Back Ratio ≥ 15 dB

Rated Wind Velocity 100m/s

Lightning Protection DC Ground

Weight 3kg

Color Gray

Dimension $\Phi 35 \times 3000$ mm

Connector Type N-Female or customized

Ingression Grade IP65

Radiating Element Material Copper

Radome Material Fiberglass

