


Fiberglass Omni Antenna OO1718-11360

Features:

- Elegant appearance, simple installation, stable performance.
- Fit for indoor & Outdoor Wall mounted.
- Fiberglass Radome Good performance in anti-vibration and resistant to aging.
- All Weather Operation
- Stable Steel Installation Kit

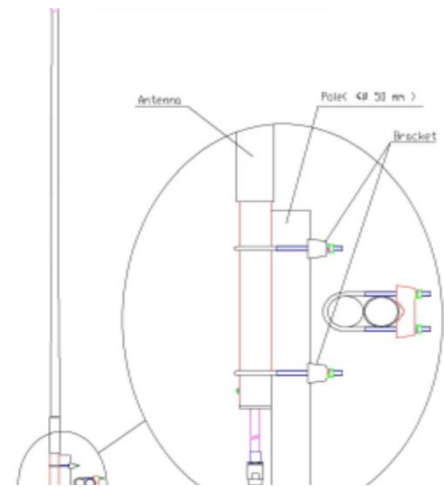

Technical Specification:

Frequency	1710 ~ 1880MHz
Bandwidth	170 MHz
Gain	10.5 dBi
VSWR	≤ 1.5
Max power	100 W
Impedance	50 Ω
Polarization	Vertical
Horizontal Beamwidth	360°
Vertical Beamwidth	14°
Front to Back Ratio	$\geq 15\text{dB}$
Rated Wind Velocity	200m/s
Lightning Protection	DC Ground
Weight	2kg
Color	Gray
Dimension	$\phi 35 \times 1800\text{ mm}$
Connector Type	N-Female or customized
Ingression Grade	IP65
Radiating Element Material	Copper
Radome Material	Fiberglass

