


Fiberglass Omni Antenna OO1819-11360

Features:

- Elegant appearance, simple installation, stable performance.
- Fit for indoor & Outdoor Wall mounted.
- Fiberglass Radome Good performance in anti-vibration and resistant to aging.
- All Weather Operation
- Stable Steel Installation Kit

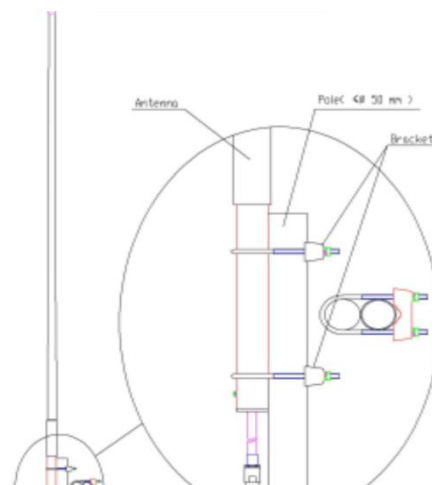

Technical Specification:

Frequency 1850 ~ 1990MHz

Bandwidth 140 MHz

Gain 10.5 dBi

VSWR ≤ 1.5

Max power 100 W

Impedance 50Ω

Polarization Vertical

Horizontal Beamwidth 360°

Vertical Beamwidth 14°

Front to Back Ratio $\geq 15\text{dB}$

Rated Wind Velocity 200m/s

Lightning Protection DC Ground

Weight 2kg

Color Gray

Dimension $\Phi 35 \times 1800$ mm

Connector Type N-Female or customized

Ingression Grade IP65

Radiating Element Material Copper

Radome Material Fiberglass

