


CWDM / 粗波分复用器

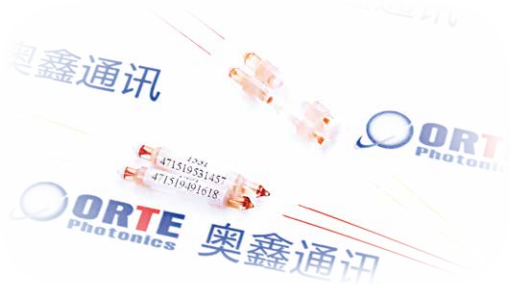

Features 特点

- Low Excess Loss
- High Isolation
- Low PDL
- Compact Design
- High Stability And Reliability

Applications 应用

- CWDM System
- CATV Network

Optical Specification 性能规范

Channel Center Wavelength	Unit	1270-1610 or 1271-1611
Channel Spacing	nm	20
Channel Clear Pass Band		ITU±6.5 or ITU±7
Transmission Insertion Loss	dB	≤0.60(Type≤0.60)
Reflection Insertion Loss	dB	≤0.50(Type≤0.40)
PDL	dB	≤0.10
Return Loss	dB	≥50.00
Directivity	dB	≥50.00
Operating Temperature	Deg.	-5-75
Storage Temperature	Deg.	-40-85
Fiber Length	m	1.00±0.10
Fiber Type		G657A1 or Customized
Fiber Diameter	um	250 / 900
Package	mm	3.0×25, 3.6×25, 5.5×33

NOTE: The parameters do not include connector, connector IL is 0.30dB
Tested at 23 Deg.

Product Ordering Guide 产品订购指南

CWDM	X	XXXX	X	X	X	X	X
CWDM: CWDM	Configuration	Channel Center Wavelength	Channel Clear Pass Band	Fiber Diameter	Package	Fiber Type	Connector
	1: 2x1	1270:1270	1: ITU±7	1: 250um	1: 3.0×25	1: SMF-28® Ultra	1: none
	2: other		2: ITU±6.5	2: 900um	2: 3.6×25		2: LC/UPC
		1271:1271	3: other	3: other	4: other	3: G657A2	3: LC/APC
					3: other	4: SC/UPC
	1611: 1611					5: SC/APC	
						6: FC/UPC	
						7: FC/APC	
						8: other	