


## ASE Light Source/ASE光源

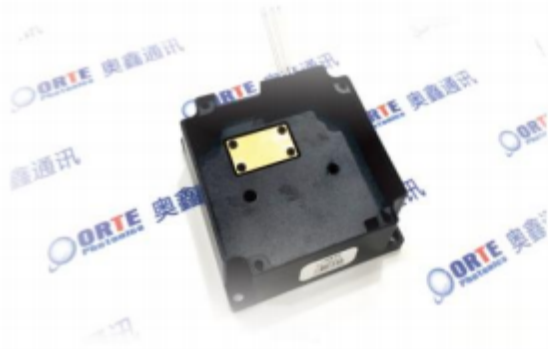

### Features 特点

- Low power Consumption
- Good temperature property
- Compact Design: 60\*60\*20mm
- Triple Output

### Applications 应用

- High precision fiber optic gyroscope

### Optical Specification 性能规范

Configuration	Condition	MIN	MAX	UNITS
Mean Wavelength (RMS@-3dB)	25°C	1530	1570	nm
FWHM (THRESH@-3dB)	25°C	9.5	-	nm
Output Power	-45~80°C	4	-	mW
Mean Wavelength change at full temperature (RMS@-20dB)	-45~80°C	-	0.6	nm
Power change at full temperature	-45~80°C	-	10%	-

The above product information is for reference only, please contact our company for the latest information.

### Product Ordering Guide 产品订购指南

ORTE-	ASE-	X-	X
ORTE	ASE-	Output Quantity	Output Power (mW)
ORTE	ASE-	1:1	1:1
		2:2	2:2
		3:3	3:3
		...	4:4
			...