


## Faraday Rotator Mirror / 法拉第旋转镜

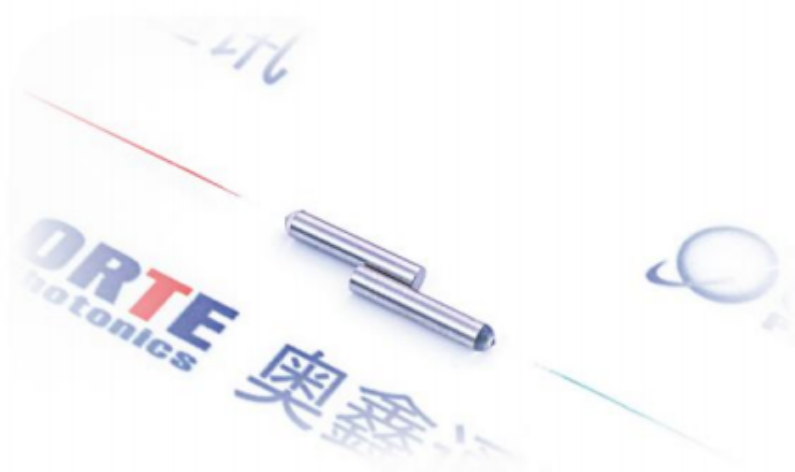

### Features 特点

- Low Excess Loss
- Wide Operating Wavelength Range
- Low PDL
- Compact Design
- High Stability And Reliability

### Applications 应用

- Fiber Optic Sensing
- Test And Measurement

### Optical Specification 性能规范

Type	Unit	Faraday Rotator Mirror (FRM)
Operating Wavelength Band	nm	1310/1550
Bandwidth	nm	±15.00
Insertion	dB	≤0.50(Type≤0.30)
Rotation Angle	Deg.	90±3
PDL	dB	≤0.10
Operating Temperature	Deg.	-5-75
Storage Temperature	Deg.	-40-85
Fiber Length	m	1.00±0.10
Fiber Type		G657A1 or Customized
Fiber Diameter	um	250
Package	mm	2.4×12

NOTE: The parameters do not include connector, connector IL is 0.30dB

Tested at 23 Deg.

The above product information is for reference only, please contact our company for the latest information.