


2×1 TAP / 2 × 1 分光器

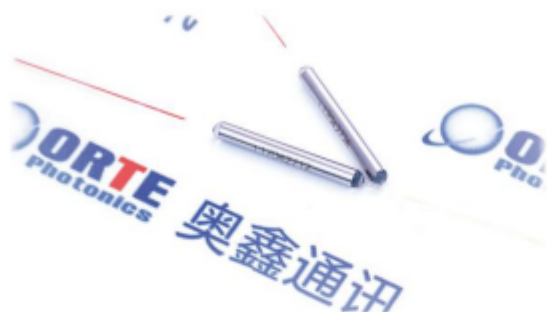

Features 特点
 Low Excess Loss
 Low PDL
 Compact Design
 Epoxy-free Optical Path
 High Stability And Reliability

Applications 应用
 EDFA
 Fiber Optic Instruments

Optical Specification 性能规范

Configuration	Unit	2×1
Operating Wavelength	nm	As:1526-1567
Insertion Loss	Standard Port	0.8
	1% Tap	19.-21.5
	2% Tap	16.-18.5
	5% Tap	12.-14.5
	10% Tap	9.5-11
Max Excess Loss	dB	0.5
PDL	dB	≤0.10
Return Loss	dB	≥50.00
Operating Temperature	Deg.	-5-75
Storage Temperature	Deg.	-40-85
Fiber Length	m	1.00±0.10
Fiber Type		G657A1 or Customized
Fiber Diameter	um	250
Package	mm	2.5×20; 3.2×30; 3.8×33

NOTE: The parameters do not include connector, connector IL is 0.30dB
 Tested at 23Deg.
 The above product information is for reference only, please contact our company for the latest information.

