


## Hybrid (ISO+GFF) / 混合器 (ISO+GFF)

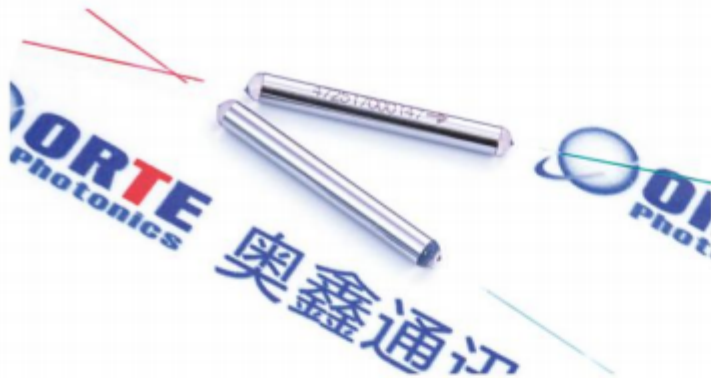

### Features 特点

- Low Excess Loss
- High Isolation
- Low PDL
- Compact Design
- Epoxy-free Optical Path
- High Stability And Reliability

### Applications 应用

EDFA

### Optical Specification 性能规范

Configuration	Unit	1×1
Type		Hybrid(ISO+GFF)
Operating Wavelength	nm	1526-1567
Excess Loss	dB	≤0.8
Insertion Loss EF Range	dB	≤0.45
Isolation(23 C)	dB	≥26.00
PDL	dB	≤0.10
PMD	dB	≤0.05
Return Loss	dB	≥50.00
Operating Temperature	Deg.	-5-75
Storage Temperature	Deg.	-40-85
Fiber Length	m	1.00±0.10
Fiber Type		G657A1 or Customized
Fiber Diameter	um	250 / 900
Package	mm	1.8×20; 2.2×22; 2.5×25; 3.2×30

NOTE: The parameters do not include connector, connector IL is 0.30dB  
Tested at 23Deg.

The above product information is for reference only, please contact our company for the latest information.

