


Mini Fused WDM / 迷你熔融拉锥波分复用器

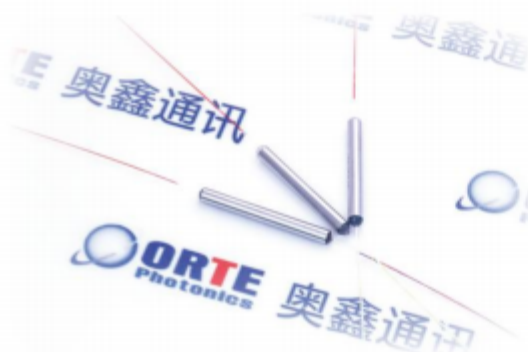

Features 特点

Mini Size
Low Excess Loss
High Isolation
High Stability And Reliability

Applications 应用

Erbium Doped Fiber Amplifiers (EDFA)
Testing Instruments
Wdm Systems

Optical Specification 性能规范

Configuration	Unit	1×2	
Type		Mini Fused WDM (WDM)	
Operating Wavelength	nm	980/1550	
Operating Bandwidth	nm	960-990/1526-1570	
Insertion Loss	dB	≤0.20	
Isolation	dB	≥19.00	
PDL	dB	≤0.08	
Return Loss	dB	≥50.00	
Directivity	dB	≥55.00	
Operating Temperature	Deg.	-5-75	
Storage Temperature	Deg.	-40-85	
Fiber Length	m	1.00±0.10	
Fiber Type		HI1060flex or OFS-20	
Fiber Diameter	um	250	250 or 900
Package	mm	2.0×20,2.4×25,3×30	2.4×35,3×35

NOTE: The parameters do not include connector, connector IL is 0.30dB

The above product information is for reference only, please contact our company for the latest information.

Product Ordering Guide 产品订购指南

WDM	X	X	X	X	X	X
WDM: Mini Fused WDM	Operating Wavelength	Package	Fiber Diameter	Package	Fiber Type	Connector
		1: 2×20		1: 2.0×20	1: ofs-16	1: none
		2: 2.4×25		2: 2.4×25	2: ofs-20	2: LC/APC
		3: 3×30		3: 3.0×30	3: HI 1060	3: LC/APC
		4: 2.4×35		4: 2.4×35	4: HI 1060Flex	4: SC/APC
		5: 3×35		5: 3.0×35	5: other	5: SC/APC
		6: other		6: other		6: FC/APC
						7: FC/APC
						8: other