


PM Tap Coupler / 保偏膜片式耦合器

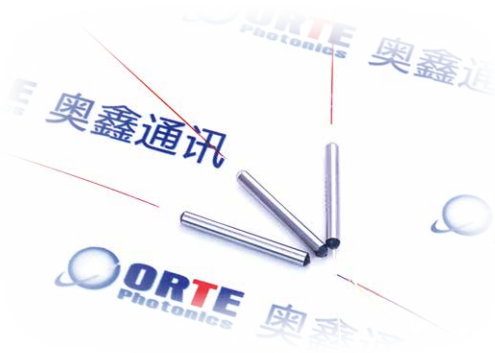

Features 特点

- Low Excess Loss
- High Extinction Ratio
- Compact Design
- High Stability And Reliability

Applications 应用

- Optical Amplifier
- Optical Networks
- Power Monitoring
- Fiber Sensors

Optical Specification 性能规范

Type	Unit	1×2
Center Wavelength	nm	1310/1550
Operating Bandwidth	nm	±20.00
Insertion	dB	3.80
Coupler Ratio	%	50±3%
Extinction Ratio	dB	25
Return Loss	dB	50
Operating Temperature	Deg.	-5~75
Storage Temperature	Deg.	-40-85
Fiber Length	m	1.00±0.10
Fiber Type		Panda PM Fiber
Fiber Diameter	um	50 / 80 / 125um Various Types
Package	mm	2.5×20, 3.8×30

NOTE: The Extinction Ratio is 18dB at -45℃ -85℃

The parameters do not include connector, connector IL is 0.30dB.

Special wavelength, special fiber, special light source, can be customized according to customer requirements.