


Special Fused WDM / 特殊熔融拉锥波分复用器

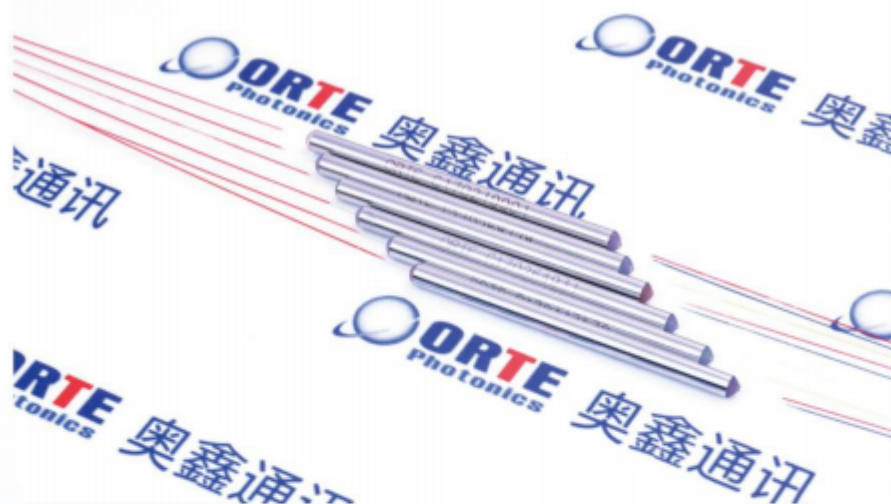

Features 特点

Low Excess Loss
High Isolation
High Stability And Reliability

Applications 应用

Erbium Doped Fiber Amplifiers (EDFA)
WDM Systems
Testing Instruments

Optical Specification 性能规范

Configuration	Unit	1×2		
Type		Special Fused WDM(SFW)		
Operating Wavelength	nm	1434/1470	980/1060	1033/1083
Operating Bandwidth	nm	1432-1435/1468-1471	975-985/1055-1065	--
Max Insertion loss	dB	0.30	0.30	0.45
Isolation	dB	≥15.00	≥16.00	≥18.00
PDL	dB	≤0.10	≤0.08	≤0.10
Return loss	dB	≥50.00		
Directivity	dB	≥55.00		
Operating Temperature	Deg.	-5-75		
Storage Temperature	Deg.	-40-85		
Fiber Length	m	1.00±0.10		
Fiber Type		G657A1 or Customized	OFS-16 or Customized	
Fiber Diameter	um	250/900		900/2000/3000
Package	mm	3×54		90×16×10

NOTE: The parameters do not include connector, connector IL is 0.30dB
Special wavelength, special fiber, special light source, can be customized according to customer requirements
The above product information is for reference only, please contact our company for the latest information.