


NT-Z3s
Bluetooth CCD barcode scanner



Optional:

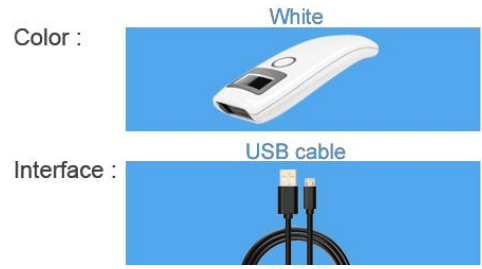

Features

1. Mini size, can be put in pocket, fast reading;
2. With LCD barcode display on the top, the barcodes can be shown on the display;
3. When reading barcodes, the scanner will vibrate and beep;
4. Supports SPP mode;
5. The bluetooth can be connected automatically, no need to scan match program, which is much easier to operate than previous bluetooth scanner.

Applicable scope

- ✓ Commercial POS system(Supermarkets)
- ✓ Warehousing and logistics
- ✓ Libraries
- ✓ Banks and Telecom
- ✓ Transportation
- ✓ Postal service
- ✓ Industrial and manufacturing management

Feature	
Light Resource	C C D (Safe visible light)
Bluetooth Version	V 4.0 , HID mode , SPP mode
CPU	32 bit high resolution
Supported Symbolgies	EAN-13, EAN-8, UPC A, UPC E, CODABAR (NW-7), Code 39, Code 93, Interleaved 2 of 5, Standard 2 of 5, Matrix 2 of 5, Code 128 EAN/UCC 128, Code 11
Charging time	3~4hour
Scans per charge	45000 times
Precision	≥ 5 mil (0.10mm)
Decode speed	260 times/second
Decode error rate	Less than 1/8 million
Depth of scan field	10-800mm
Print Contrast Signal	≥ 30°
scan angle	Yaw(Skew)45° & Pitch60°
Working Distance	Over 30meter
Battery capacity	1200MAH

Mechanical / Electrical	
Working Voltage	3.3 VDC ±5%
Working Current	Receiving 26.6mA, Launching 24mA
Scanner Material	Eco-friendly, ABS

Environment	
Operating temperature	-20°C-45°C
Storage temperature	-20°C-45°C
Humidity	5%-85%

Packing list

scanner × 1	
User's guide × 1	
cable × 1	

Packing details

scanner	Weight	105*50*25mm
	1pc/box; 190mm × 115mm × 85mm; 220g	100g;
Inner Box	50 sets/ctn;12kg/ctn; 600mm×450mm×420mm	
Carton	10500pcs; 150ctns	
20FT Container	7500pcs; 150ctns	
	23800pcs; 325ctns	

Certifications

