

NT-Z2s
Bluetooth 2D barcode scanner



Features

1. Mini size, can be put in pocket, fast reading;
2. With LCD barcode display on the top, the barcodes can be shown on the display;
3. When reading barcodes, the scanner will vibrate and beep;
4. Supports SPP mode;
5. The bluetooth can be connected automatically, no need to scan match program, which is much easier to operate than previous bluetooth scanner.

Feature	
Light Resource	CMOS
Bluetooth Version	V 4.0 , HID mode , SPP mode
CPU	32 bit high resolution
Supported Symbolgies	2D: PDF417、QR Code (QR1/2, Micro)、Data Matrix (ECC200, ECC000, 050, 080, 100, 140)、Chinese Sensible Code 1D : Code128, UCC/EAN-128, AIM128, EAN-8, EAN-13, ISBN/ISSN, UPC-E, UPC-A, Interleaved 2 of 5, ITF-6, ITF-14, Matrix 2 of 5, Industrial 25, Standard 25, Code39, Codabar, Code 93, Code 11,
Charging time	2~3hour
Scans per charge	45000 times
Precision	≥ 5 mil (0.127mm)
Decode speed	5 in/s(12.7 cm)
Decode error rate	Less than 1/8 million
Depth of scan field	10-800mm
Print Contrast Signal	≥ 30°
scan angle	Yaw(Skew)45° & Pitch60°
Working Distance	Over 30meter
Battery capacity	1200MAH


Mechanical / Electrical

Working Voltage	3.3 VDC ±5%
Current	working 230mA Standby: 3.4mA (RS232) , 54.0mA(USB)
Rated power consumption	186mW

Environment

Operating temperature	-20°C-45°C
Storage temperature	-20°C-45°C
Humidity	5%-85%

Optional:

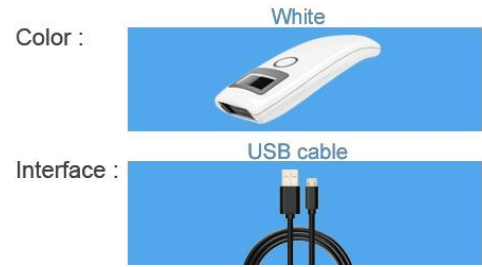

Applicable scope

- ✓ Commercial POS system(Supermarkets)
- ✓ Warehousing and logistics
- ✓ Libraries
- ✓ Banks and Telecom
- ✓ Transportation
- ✓ Postal service
- ✓ Industrial and manufacturing management

Packing list

scanner × 1	
User's guide × 1	
cable × 1	

Packing details

scanner	Weight	105*50*25mm
	1pc/box; 190mm × 115mm × 85mm; 220g	100g;
Inner Box	50 sets/ctn;12kg/ctn; 600mm×450mm×420mm	
Carton	10500pcs; 150ctns	
20FT Container	7500pcs; 150ctns	
	23800pcs; 325ctns	

Certifications

