


**NT-2030**  
**1D wired barcode scanner**



**Optional:**

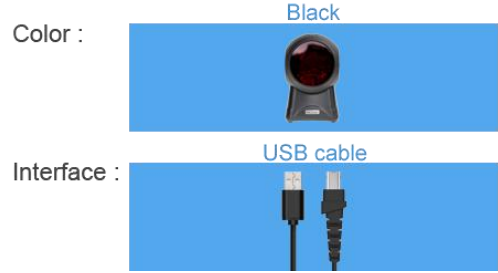

**Features**

1. Operation speed, decoding ability.
2. Decoding speed of 1500 lines / sec, the real touch.
3. Customer setting : Barcode setting mode, easy to operate
4. Automatic identification of anti-white bar code: no need to set, automatic identification. Intelligent AGC control
5. Very long depth of field: 0-200mm @ (UPC / EAN 100%, PCS90%).
6. BER test : the product has passed 5 million times without error test.

**Applicable scope**

- ✓ Comercial POS system(Supermarkets)
- ✓ Warehousing and logistics
- ✓ Libraries
- ✓ Banks and Telecom
- ✓ Transportaion
- ✓ Postal service
- ✓ Industrial and manufacturing management

Feature	
Light Resource	650nm laser (Safe visible light)
Port/Interface	USB (standard)
Supported Symbologies	Code 93,full ASCII, code bar, industrial 2 of 5, interleave 2 of 5, matrix 2 of 5, code 93, code 128, code 32, standard code 93, EAN 128, MSI, EAN8&13,UPCA&E, Plessey, DataBar14, telepe and all 1D barcode
Precision	4mil
Depth of scan field	10-300mm
Operation	Manual
Decode speed	1500 times/sec.
Decode Error Rate	less than 1/7 million
Print Contrast Signal	≥30°
Scan Angle	Yaw(Skew) 72° pitch 82°
Mechanical/ Electrical	
Voltage	5VDC±10%
Current	352mA
Environmetal	
Operation Temperature	0°C~50°C
Storage Temperature	-20°C-70°C
Humidity	5%-95%

**Packing list**

scanner × 1	
User's guide × 1	
cable × 1	

**Packing details**

scanner	Size(L*W*H)	100mm*109mm*156mm
	Weight	465g;
Inner Box	1pc/box; 140mm*120mm* 170mm; 720g	
Carton	20sets/ctn; 11.8kg/ctn; 690mm×420mm× 255mm	
20FT Container	10500pcs; 150ctns	
	7500pcs; 150ctns	
40FT Container	23800pcs; 325ctns	
	16250pcs; 325ctns	

**Certifications**

