

NT-R2
Bluetooth 2D barcode scanner




Features

1. Long communication distance; 10 Meters
2. Factory direct sale, stable scanning
3. Fast and accurate in reading 2D codes
4. Service life of button reaches up to 8 million times.
5. Very convenient to carry ring scanners

Feature	
Resolution	1MP
Light Resource	640*480CMOS
illumination	Red light LED (625nm±10nm)
Focus	Laser650nm
Bluetooth Version	V 4.0 , HID mode , SPP mode
Supported Symboligies	2D : PDF417、QR Code (QR1/2、Micro)、Data Matrix (ECC200, ECC000, 050, 080, 100, 140), HanXin code. 1D :Code128, UCC/EAN-128, AIM128, EAN-8, EAN-13, ISBN/ISSN, UPC-E, UPC-A, Interleaved 2 of 5, ITF-6, ITF-4, Matrix 2 of 5, Codabar, Industrial 25, Standard 25, Code39, Code 93, Code 11, Plessey, MSI-Plessey, GS1-DataBarTM(RSS)(RSS-14、RSS-Limited、RSS-Expand)
Charging time	2~3hour
Precision	≥ 4mil (0.10mm)
Decode error rate	Less than 1/8 million
Depth of scan field	Ean-13 55mm~360mm (13mil) Code 39 45mm~160mm (5mil) Data Matrix 40mm~110mm(10mil) QR Code 45mm-140mm (15mil) PDF 417 50mm-110mm(6.67mil)
Battery capacity	360MAH
Print Contrast Signal	≥ 15°
scan angle	Yaw(Skew)±55° & Pitch±55°
Mechanical / Electrical	
Power voltage	3.3-4.2 VDC ± 5%
Current	Working:105mA(Maximum)
Environment	
Operating temperature	0°C ~ +50°C
Storage temperature	-20°C ~ +70°C
Humidity	5%-95%

Optional:

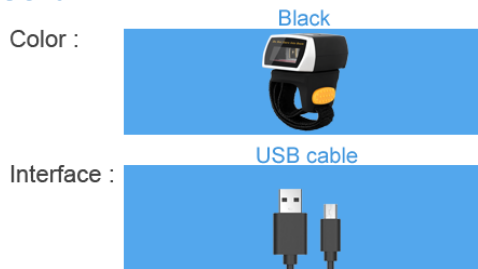

Applicable scope

- ✓ Commercial POS system(Supermarkets)
- ✓ Warehousing and logistics
- ✓ Libraries
- ✓ Banks and Telecom
- ✓ Transpiration
- ✓ Postal service
- ✓ Industrial and manufacturing management

Packing list

Scanner × 1	
User's guide × 1	
Cable × 1	

Packing details

	Weight	50*30*45mm
scanner	1pc/box; 120mm × 110mm × 50mm; 180g	270g;
Inner Box	100 sets/ctn;12kg/ctn; 600mm×450mm×420mm	
Carton	10500pcs; 150ctns	
20FT Container	7500pcs; 150ctns 23800pcs; 325ctns	

Certifications

