

NT-R3
Bluetooth CCD Laser barcode scanner



Features

1. Factory direct sale, stable scanning
2. Fast and accurate in reading 1D screen codes
3. Service life of button reaches up to 8 million times.
4. Resolution up to 2500
5. Very convenient to carry ring scanners

Feature	
Light Resource	C C D (Safe visible light)
Port/Interface	USB (standard), RS232 (optional)
Bluetooth Version	V 4.0 , HID mode , SPP mode
Supported Symbologies	EAN-8, EAN-13, Codabar, CODE11 , CODE 39, CODE 93, CODE128, China Post, GS1-128, GS1 Limited, GS1 Omnidirectional, UPC-A, UPC-E, ISBN/ISSN, ISBT , Interleaved 2 of 5 , Matrix 2 of 5 , Industrial 2 of 5 , MSI, Plessey, ITF14
Resolution	2500
Presicion	≥4 mil
Depth of scan field	Code 39:110mm-170mm(0.127mm 5mil) Code 39:100mm-450mm(0.5mm 20mil) Code 39:240mm-480mm(1.0mm 40mil) UPC/EAN 13:100mm-250mm(0.33mm 13mil)
Battery capacity	2000MAH
Charging time	4~6 hours
Decode speed	300times/ second
Print Contrast Signal	≥10°
Scan Angle	Yaw(Skew) 60° Pitch 60°


Mechanical / Electrical

Working Voltage	3.3VDC ± 5%
Current	Maximum current :225mA

Environment

Operating temperature	0°C~+50°C
Storage temperature	20°C~70°C
Humidity	5%-95%
Certifications	CE, ROHS, FCC

Optional:

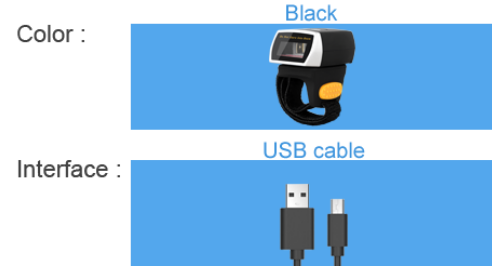

Applicable scope

- ✓ Comercial POS system(Supermarkets)
- ✓ Warehousing and logistics
- ✓ Libraries
- ✓ Banks and Telecom
- ✓ Transportaion
- ✓ Postal service
- ✓ Industrial and manufacturing management

Packing list

scanner × 1	
User's guide × 1	
cable × 1	

Packing details

scanner	Weight	50*30*45mm
	1pc/box; 120mm × 110mm × 50mm; 180g	270g;
Inner Box	100 sets/ctn;12kg/ctn; 600mm×450mm×420mm	
Carton	10500pcs; 150ctns	
20FT Container	7500pcs; 150ctns	
	23800pcs; 325ctns	

Certifications

