

YIQIXIESHOUGONGJINWEILAI
一起携手 共进未来

SHANDONG
SHUANGWEN

SHANDONG SHUANGWEN INTERNATIONAL TRADE CO., LTD
山东双文国际贸易有限公司

CONTACT

DIRECTOR: Catherine Liu

WHATSAPP/WECHAT: +86 17854907838

EMAIL: cherry@sdshuangwen.com



微信二维码



Shuang Wen International Trade Co., LTD

山东双文国际贸易有限公司

SHANDONG **SHUANGWEN**
INTERNATIONAL TRADE COMPANY

COMPANY PROFILE



Shuang Wen International Trade Co., Ltd

公司简介 COMPANY PROFILE



Shandong Shuangwen International Trade Co., General business is-Plywood manufacturer export. We have factory in Linyi City, Monthly export Commercial Plywood, Film Face Plywood, Construction Plywood, Furniture Plywood about 6000CBM. More than 6 years working experience international trade. Focus on us. We will become your best plywood supplier. In order to better meet the needs of customers, we have a lot of factories and domestic cooperation, more than 10 years, has been committed to providing customers with the best products, prices and services. We hope to establish long-term partnership with customers from all over the world. Welcome to contact us!





Shuang Wen International Trade Co., Ltd

Chip Board

Products Description

Thickness	6~20mm
Size	1220*2440mm Or Based On Customer's Needs
Grade	First-Class
Feature	Beautiful, Moisture-Proof
Material	Wood Fiber
Density	600-700kg/m ³
Surface	Sanded
Glue	E1, E2, E0
Grade	First-Class
Usage	Indoor
Certification	ISO9001, CE
Delivery Time	15 days
Core Panel	MDF Plywood Chipboard Practice board
Carving Technology	Synchronous relief
Color	Colored or Plain



Commerical Plywood



Shuang Wen International Trade Co., LTD

Product Name	Commercial Plywood
Size	1220*2440mm Or Other Size As Per Customer's Request
Thickness	2-25mm
Face & Back	Okoume,Bintangor,Pine,Pencil Cedar, PLB,Bleached Poplar,Hardwood,Birch,Etc.
Core	Poplar,Combi.,Hardwood,Finger Joint,Ect.
Grade	BB/BB,BB/CC
Sanding	Sanding,Non-sanding
Glue Type	E0,E1,E2,MR and WBP
Application	Construction,Packaging,Furniture and Decoration
MOQ	1*20ft Container



03

Film Faced Plywood



Shuang Wen International Trade Co., LTD



Product Name	Film Faced Plywood
Warranty	18 Months
Application	Building Construction
Place Of Origin	China Linyi
Material	Poplar, Eucalyptus, Hardwood, Birch, Combi, Customized
Film	Brown, Black, Red
Size	1220x2440mm, 915x1830mm, Customized
Thickness	10-35mm
Glue	Melamine WBP Glue; Phenolic WBP Glue
Moisture Content	8-14%
Certification	CE; CARB; FSC; ISO;
MOQ	1x40HC
Delivery Time	7-14 Days after order confirmed
Supply Capacity	500,000 sheets per month

04


MDF



Shuang Wen International Trade Co., LTD

Product Description

Product Name	Plain MDF/Melamine MDF
Size	1220*2440mm
Thickness	2-25mm,Customsized
Glue	E1,E2
Application	Indoor,Furniture
Packing	Pallet Package
MOQ	1*20'GP Container
Density	650-780 kg/m ³
Surface	Plain Or Double Faced
Color	Solid Color, Wood Grain Color
Supply Ability	3000 Cubic Meter/Month

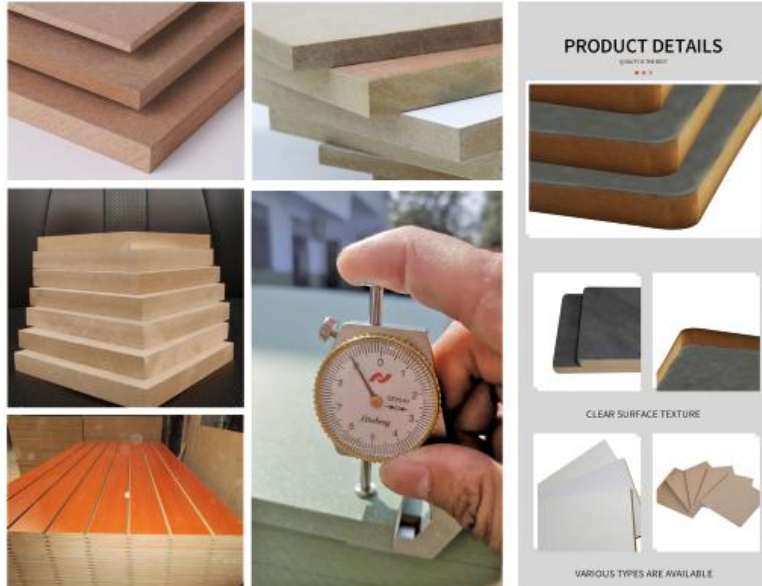

Melamine Plywood



Shuang Wen International Trade Co., LTD



Product Name:	Melamine Face Plywood	
Core:	MDF,PLYWOOD,CHIPBOARD,BLOCKBOARD	
Glue:	MR/E0/E1/E2	
Size(mm):	1220*2440mm	
Thickness(mm):	2.0-25.0mm	1/8inch(2.7-3.6mm)
		1/4inch(6-6.5mm)
		1/2inch(12-12.7mm)
		5/8inch(15-16mm)
		3/4inch(18-19mm)
Moisture:	15%	
Packing:	Interior packing:0.2mm plastic	
	Outside packing:bottom is pallets, covered with plastic film,around is carton or plywood, strengthen by steel or iron 3*6	
Quantity:	20GP	8pallets/21M3
	40GP	16pallets/42M3
	40HQ	18pallets/53M3
Usage:	Usage adequate for making furniture or construction, package or industry,	

OSB



Shuang Wen International Trade Co., LTD

Product	Oriented strand board (OSB)
Material	Poplar, Pine, Combi, Hardwood
Glue	MDI/WBP / Phenolic /E0 /E1/E2
Size	1220x2440,1250x2500 or accept customization
Thickness	6-45mm(9.5mm,11.1mm,12mm,15mm,18mm) or accept customization
MOQ	50 CBM
Delivery Time	15-25 Days
Thickness Tolerance	Thickness: +/- 0.2mm
Size Tolerance	Length & Width: +/- 2mm
Usage	Roof decking, furniture, packing, hoarding, signboards and portable building, constructional insulation board,
Density	600-700KG/CBM
Production Advantages:	<ol style="list-style-type: none"> 1) Tight construction and high strength; 2) Minimum twisting, delamination or warping; 3) Water proof, consistent when exposed in the natural or wet environment; 4) Low formaldehyde emission; 5) Good nailing strength, easy to be sawn, nailed, drilled, grooved, planed, filed or polished; 7) Good heat and sound resistant, easy to be coated; 8) Note the OSB 3 is for use on flat roof situations, a far better product than standard chipboard or particleboard.
Payment	T/T or L/C at sight

Application



Application



Pine Plywood



Shuang Wen International Trade Co., LTD

Specification

Product	Construction Pine Plywood
Size	1220x2440mm or 1250x2500mm or your request
Thickness	5mm/6mm/8mm/9mm/12mm/15mm/16mm/18mm/20mm/25mm
Surface	Knotty pine veneer laminated
Core	100% full poplar wood core
Glue	Mr, Melamine, E1, E2, E0
Usage	Construction shuttering/Roofing/Flooring/Can be grooved surface and edge T&G
Loading	20GP/23 cubic meters 40HQ/53 cubic meters



UV Fancy Plywood



Shuang Wen International Trade Co., Ltd

Products Description

Product Name	UV Face Birch Plywood
Core	Peeling Veneer, Poplar, Pine, Combl, Euaalyptus, Birch, Meranti,
Direction	Okoume, Other Hardwood
Size	915*1830MM/1220*2440MM/1250*2500MM/610*2500MM/1500*3000MM/1525*3050MM, Upon To Request
Thickness And Tolerance	3MM~45MM; +/-0.5MM;
F&B	Peeling Birch Face & Back;(Can be UV Face Agin)
Glue	Phenolic Formaldehyde Adhesice(Pf, Phenolic Wbp Glue, Phenolic Glue), Melamine Wbp Glue(Muf, Mf, Melamine Glue);
Leading Time	Within 15~30 Days
Usage	Package/Industry, Construction, Furniture & Handicraft, Wooden House;
Capacity	10000Cbm Per Month;
Payment	TT, L/C, DP, Moneygram, Western Union,Paypal;
Certification	Ce,Carb,Fsc,Iso



Engineered (Recon) Plywood



Shuang Wen International Trade Co., Ltd



Engineered Veneer Plywood

Face/Back	Recon Veneer
Core	Poplar, Hardwood, Combi,MDF
Size	1220*2440mm, 1250*2500mm, 610*2440mm, 1220*1220mm or as requested
Thickness	2-25mm
Thickness Tolerance	+/- 0.2mm (thickness < 6mm), +/- 0.3-0.5mm (thickness ≥ 6mm)
Grade	AA/BB, BB/BB, BB/CC, CC/CC or as requested
Glue	E0, E1, E2
Moisture Content	10% - 15%
Application	Furniture, Decoration, Construction, Packing