



## -20/25°C Freezer(Economic Type)



BDF-20V40

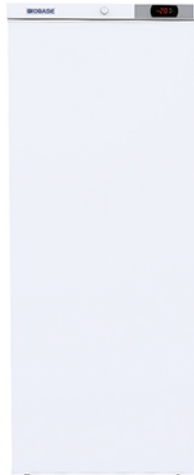

BDF-25V230

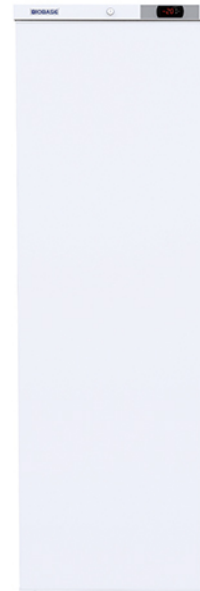

BDF-25V300

### Technical Parameters

| Model                      | BDF-20V40   | BDF-25V230                                   | BDF-25V300     |
|----------------------------|---|--|----------------|
| Capacity                   | 40L   | 230L   | 300L           |
| Temp. Range                | -10~-20°C   | -10~-25°C                                    |                |
| Temp. Accuracy             | 1°C   |  |                |
| Temp. Uniformity           | ≤3°C  |  |                |
| Temp. Stability            | ≤3°C  |  |                |
| Control System             | Microprocessor control  |  |                |
| Display                    | LED   |  |                |
| Alarm                      | High and low temperature alarm, thermostat fault alarm, door switch alarm       |  |                |
| Refrigeration Type         | Direct-cooling  |  |                |
| Refrigerant                | R600a/40g   | R600a/64g                                    | R600a/80g      |
| Compressor                 | International famous brand compressor /1  |  |                |
| Condenser & Evaporator     | Bundy tube, side plate type;<br>aluminum tube, wound tube type                  | Bundy tube, side plate type; wire, tube type |                |
| Defrost                    | Manual defrost  | Automatic/Manual defrost                     |                |
| Construction               | Polyurethane cyclopentane foam  |  |                |
| Material                   | Internal Material   | HIPS   |                |
|                            | External Material   | Precoated steel plate                        |                |
| Door                       | 1/Cyclopentane monolithic foam door   |  |                |
| Consumption                | 90W   | 110W   | 120W           |
| Power Supply               | AC 220V, 50Hz(Standard); 220V, 60Hz, 110V, 60Hz(Optional, external transformer) |  |                |
| Casters                    | No  |  |                |
| Adjustable Shelves/ Drawer | 1   | 6  | 8              |
| Standard Accessory         | Test hole, shelf  |  |                |
| Internal Size (W*D*H)      | 400*295*426mm   | 410*440*1330mm                               | 410*440*1700mm |
| External Size (W*D*H)      | 480*460*585mm   | 595*600*1565mm                               | 595*600*1965mm |
| Package Size (W*D*H)       | 510*532*648mm   | 630*644*1715mm                               | 630*644*2015mm |
| Net Weight                 | 18kg  | 60kg   | 77kg           |
| Gross Weight               | 20.5kg  | 65kg   | 82kg           |