
## Large-scale Electronic Balance

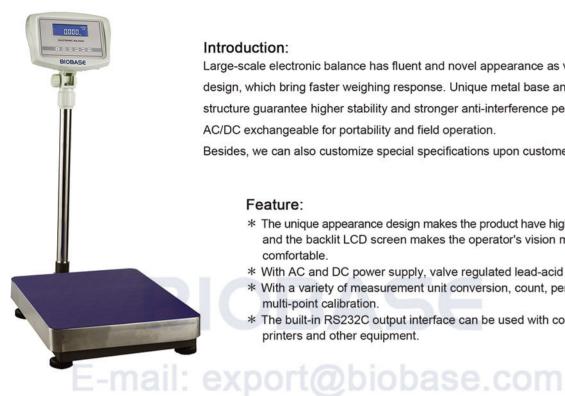

### Introduction:

Large-scale electronic balance has fluent and novel appearance as well as new design, which bring faster weighing response. Unique metal base and mechanical structure guarantee higher stability and stronger anti-interference performance. AC/DC exchangeable for portability and field operation.

Besides, we can also customize special specifications upon customer's request.

### Feature:

- \* The unique appearance design makes the product have high stability, and the backlit LCD screen makes the operator's vision more comfortable.
- \* With AC and DC power supply, valve regulated lead-acid battery.
- \* With a variety of measurement unit conversion, count, percentage, multi-point calibration.
- \* The built-in RS232C output interface can be used with computers, printers and other equipment.

**Technical Parameters:** 

Model	Capacity	Readability	Power Supply	Scale Size (mm)	External Size (W*D*H) mm	Net Weight	Package Size (W*D*H) mm	Gross Weight
BE40000L	0-40000g	1g	100~240V, 50/60Hz	500*400	630*400*880	11kg	870*465*225	15kg
BE50000L	0-50000g							
BE60000L	0-60000g							
BE100000L	0-100000g							
BE150000L	0-150000g							
BE200000L	0-200000g							
BE300000L	0-300000g							
BE50000L-10	0-50000g	10g						
BE60000L-10	0-60000g							
BE100000L-10	0-100000g							
BE150000L-10	0-150000g							
BE200000L-10	0-200000g							
BE300000L-10	0-300000g							
BE500000L-10	0-500000g							
BE100000L-50	0-100000g	50g						
BE150000L-50	0-150000g							
BE200000L-50	0-200000g							

### **BM-50 Series Rapid Moisture Meter**

### Features:

- \* LCD Display
- \* RS232 communication interface
- \* Convenient and quick operating with 6 buttons.
- \* Heating element, Halogen lamps, proper for samples requires quick heating.
- \* Adopting heating-insulated weighing sensor avoids accuracy affected by heating.



### **Technical Parameters:**

Model	BM-50-10	BM-50-5	BM-50-1		
Capacity	50g				
Weight Readability	0.01g	0.005g	0.001g		
Repeatability Standard Deviation	0.01g	0.05g	0.002g		
Linear Error	0.01g	0.05g	0.002g		
Moisture Percentage Accuracy	0.3%	0.2%	0.1%		
Scale Size	Ф90mm				
Temperature Capacity	50~180℃	50~180°C	50~180°C		
Ambient Temperature	10~30℃	10~30℃	10~30℃		
Power Supply	AC110/220V±10%, 50/60Hz; Power cord, no battery				
Package Size	465*335*368mm				
Gross Weight	4.1kg				

# Electronic Density (Specific Gravity) Balance



### **Technical Parameters:**

Model	BA-100D	BA-200D			
Max Capacity	100g	200g			
Repeatability	10mg				
Linear Error	20mg				
Min Capacity	pacity 10mg				
Fixed Support	H=203mm				
Scale Size	Ф110mm				
Output	RS-232C				
Power Supply	AC110/220V±10%, 50/60Hz; Power cord, no battery				
Gross Weight	3.5kg				
Package Size	377*281*278mm				
Accessories	Measuring platform, measuring cup, fixed support, thermometer, doublehook weights, platinum wire, plumb bob, wire basket, balance body, adaptor and standard weights				

11 12