

Biochemistry Incubator



Safety Functions:

- \* Temperature protection threshold value can be set.
- \* Auto-off protection and alarm for abnormal situation.
- \* Parameters can be saved automatically when power off or system error.

Features:


- \* LCD touch screen.
- \* Double door design.
- \* Polished stainless steel chamber.
- \* Round angle structure, easy to clean.
- \* Universal castors for easy movement.
- \* CFC-free environmental friendly refrigerant.
- \* Auto defrost and manual defrost both available
- \* Microprocessor PID temperature control: accurate and reliable.
- \* BOD socket integrated inside for additional small equipment.

Technical Parameters:

Model	BJPX-B100	BJPX-B150	BJPX-B200	BJPX-B250
Capacity	100L	150L	200L	250L
Temp. Range	0~60°C			
Temp. Fluctuation	±1°C			
Temp. Uniformity	±2°C at 37°C			
Shelves	2 pcs/ adjustable			
Time Range	0~999h59min			
Refrigerant	R134a (CFC free, eco-friendly)			
Working Type	Continuous			
Standard Accessory	BOD socket, built-in printer, 2 test ports, lock			
Optional accessories	USB port			
Consumption	1200W		1400W	1500W
Power Supply	AC220V±10%, 50/60Hz(Standard); AC110±10%, 60Hz(Optional)			
Internal Size(mm)	500*350*580	550*401*690	600*450*750	660*450*850
External Size(mm)	644*647*1170	690*692*1270	742*743*1340	802*743*1440
Packing Size(mm)	769*772*1327	815*817*1327	865*867*1497	865*927*1597
Gross Weight(kg)	105	120	130	145



LCD touch screen

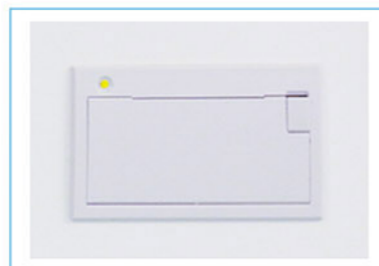

Test port



Built-in printer



Double door