


## Manual Medical Sealer

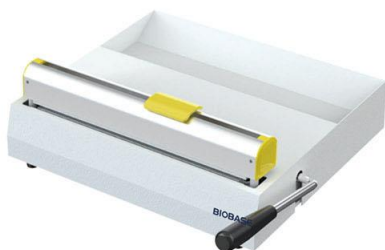

### Features:

- \* Carbon steel spray-coated housing, aluminum alloy pressure plate, high temperature resistance, aging resistance, long service life.
- \* Equipped with a long pressing handle, more labor-saving.
- \* With temperature adjustment function, it can adapt to different packaging materials.
- \* With over-temperature protection function.
- \* Adopt high-quality alloy blades, cutting is smooth and flat.
- \* The effective sealing packaging bag width can reach 280mm.

### Technical Parameters:

Model	MS-H1
Shell Material	Carbon steel spray
Accessories Material	Aluminum alloy, 304 stainless steel
Heat Sealing Temperature	60~220°C, can be adjustable
Seal Width	10mm
Seal Method	Manual pressing
Input Power	300W
External Size	370*300*130mm
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz
Net Weight	5.5kg
Packing Size	420*380*160mm
Gross Weight	6.2kg

## Automatic Medical Sealer



MS-10



MS-30P

### Features:

- \* Automatic fast continuous heat sealing technology is adopted to improve the packaging efficiency
- \* High temperature ceramic plate is adopted, which heats up quickly, heats evenly, can be dry-burned, and has a long service life
- \* Intelligent temperature control temperature is adjustable from room temperature to 220°C, and the working temperature is accurately controlled by  $\pm 1^\circ\text{C}$
- \* It has a fault prompt function, which can monitor the operation of the machine in real time during operation
- \* The floating constant pressure pressing system design is suitable for the sealing needs of high and low temperature sterilization packaging bags, paper-plastic three-dimensional bags and paper-paper bags
- \* Printing function for model MS-30P

### Technical Parameters:

Model	MS-10	MS-30P
Shell Material	Casing carbon steel spray-coated	Casing carbon steel spray-coated
Accessory Material	Aluminum alloy, 304 stainless steel	Aluminum alloy, 304 stainless steel
Heat Sealing Temperature	RT~220°C, can be adjustable	RT~220°C, can be adjustable
Sealing Width	12mm	12mm
Sealing Speed	$\geq 10\text{m/min}$	$\geq 10\text{m/min}$
Sealing Margin	0~40mm	0~40mm
Screen	Digital tube display	7-inch color touch screen
Control System	/	Industrial system
Printing System	/	Printing module can be ejected from the side to replace the ink cartridge
Printing Mode	/	Needle type, single line
Information Export	/	USB
Input Power	400W	400W
Power Supply	Standard: 220V 50/60Hz, optional: 110V 50/60Hz	Standard: 220V 50/60Hz, optional: 110V 50/60Hz
External Size	540*240*188mm	540*240*188mm
Net Weight	11kg	12kg
Packing Size	615*315*260mm	615*315*260mm
Gross Weight	14kg	15kg