


Western Blot Electrophoresis Tank

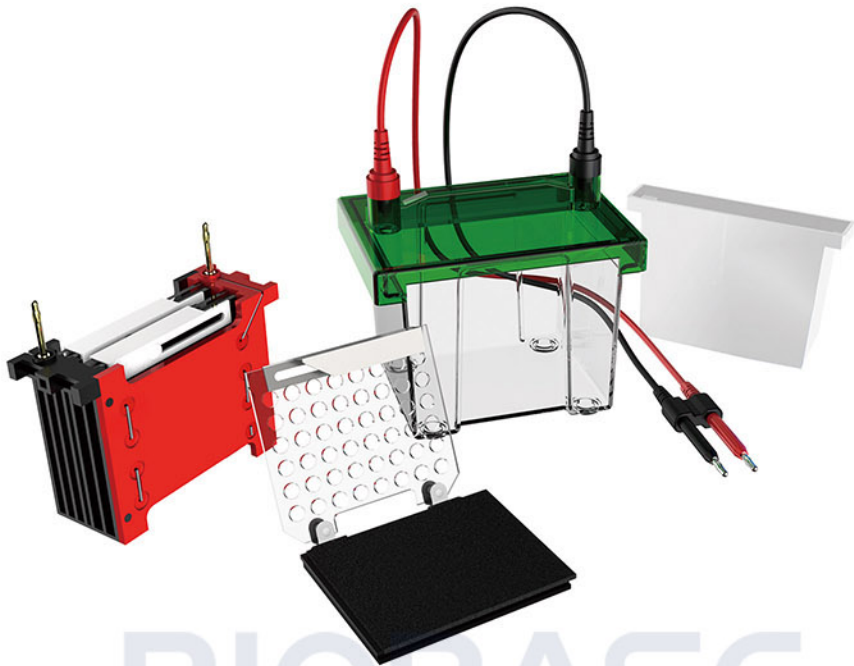

Application:

This product is a fast and high-quality transfer operation for small protein gels.

Features:

- * The positive electrodes are gathered together 4cm to generate a strong electric field for effective protein transfer. The built-in ice box or blue crystal ice box is optional to quickly absorb the heat generated during the electrophoresis process.
- * Use with BK-VET01, BK-VET02.
- * Highly flexible wire, power-off design when opening the cover to ensure safety.
- * The electrode head can be replaced for easy maintenance.
- * 99.99% high-purity platinum electrode, the best electrical conductivity, corrosion and aging resistance.
- * Recommended power supply: BEP-300I, BEP-600I, BEP-600D.

Technical Parameters:

| Model | BK-TET01 |
|-------------------------|--|
| Transfer Gel Area (W*L) | 110*90mm |
| Buffer Volume | 700ml |
| Standard Accessories | Body tank *1, Cap*1, Transfer core*1 set, Transfer clip*2, Sponge cushion*4, Ice box*1 |
| External Size (L*W*H) | 150*120*130mm |
| Package Size(L*W*H) | 290*290*200mm |
| Gross Weight | 1.3kg |

UV Transilluminator



Function Overview:

The function of the ultraviolet analyzer is to be used for fluorescence analysis: when a material molecule in the ground state is exposed to excitation (ultraviolet light), it absorbs the excited energy and the material molecule is in the excited state.

Features:

- * Equipped with a fixed camera port rack, the instrument is suitable for most SLR cameras on the market.
- * With anti-ultraviolet observation window filter 99% ultraviolet, real-time observation of the sample situation, more intuitive, more safe.
- * Nano medical ultraviolet lamp, the ultraviolet intensity of 20μW/cm away from the sample, in line with the measurement standard.

Technical Parameters:

| Model | BK-UA2 |
|--------------------------|---|
| UV Lamp | 6W*10pcs |
| Reflection Wavelength | 254nm, 365nm |
| Transmission Wavelength | 302nm |
| Visible Light | 60W |
| Reflective Filter Size | 200*80mm |
| Transmission Filter Size | 200*150mm |
| UV Intensity | Ultraviolet intensity of 20cm away from the sample reaches 20μW/cm² |
| Power Supply | 220V, 50Hz |
| Packing Size | 480*395*535mm |
| Gross Weight | 7kg |