


Intelligent Centrifuge Balancer

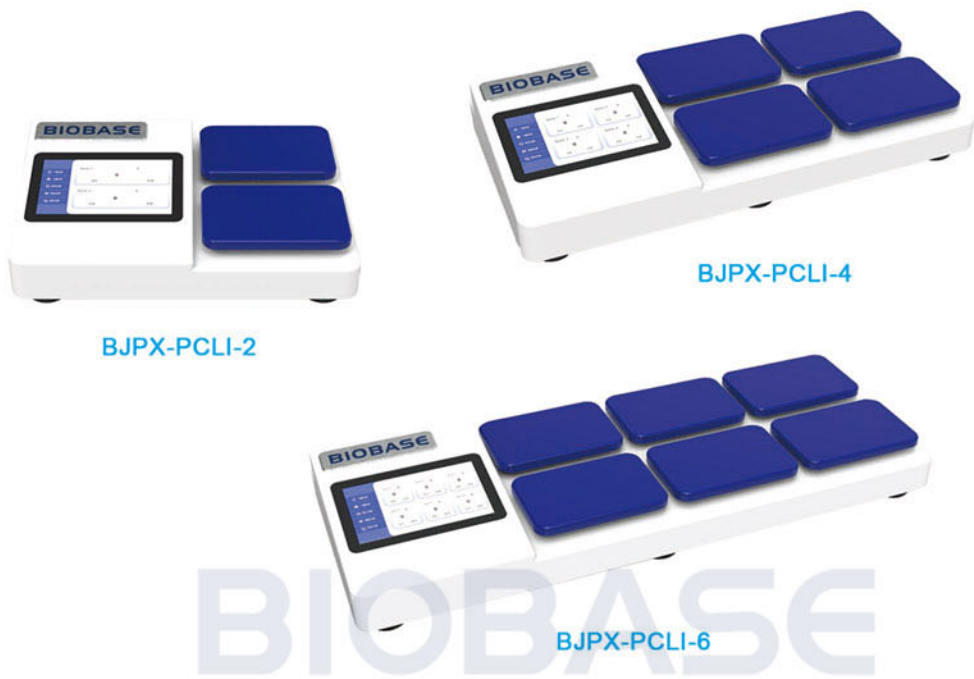

Features:

- * Microcomputer processing technology with program memory ensures high accuracy.
- * Each pallet weighing system is independently controlled.
- * Customize the specific gravity coefficient and easily convert between g and ml.
- * Directly display the weight and weight difference of each pallet.
- * Directly calibrate the weighing panel.
- * 7.0-inch true-color touchscreen display.

Technical Parameters:

Model	BJPX-PCLI-2	BJPX-PCLI-4	BJPX-PCLI-6
Display	7.0-inch touch screen		
Pallet Number	2	4	6
Weighing Range	0~5000g		
Resolution	1g		
Repeatability	±1g		
Linear	±1g		
Ambient Temperature	5~30℃		
Single Pallet Size	124*180mm		
Rated Power	8W		
Power Supply	AC100~240V 50/60Hz		
External Size(L*W*H)	420*320*120mm	610*320*120mm	800*320*120mm
Net Weight	7.5kg	10.5kg	13.5kg
Packing Size(L*W*H)	650*480*305mm	840*480*305mm	1030*480*305mm
Gross Weight	27.5kg	30.5kg	33.5kg

Low Temperature Blood Operating Cabinet



Features:

- * The operating space features a sloped, trapezoidal structure for optimal ergonomics.
- * Microcomputer-based precision temperature control technology ensures high temperature accuracy, a real-time digital display of the tabletop temperature, over- and under-temperature alarms, and convenient parameter settings.
- * The product is equipped with a built-in multi-function socket for powering external devices to meet your work needs.
- * The tabletop is crafted from high-quality brushed stainless steel for an attractive appearance and enhanced ease of use and cleaning.
- * Protection for personnel: leakage current and overvoltage protectors are included.
- * Protection for samples: over- and under-temperature alarms are included.
- * Product self-protection: The compressor features delayed start and high-temperature protection.

Technical Parameters:

Model	BJPX-PX
Display	3.5-inch color LCD touch screen
Refrigerant	R290
Refrigeration Mode	Forced air cooling
Temperature Control Range	2~8℃
Temperature Display Resolution	0.1℃
Ambient Temperature	10~28℃
Refrigerating Chamber Size(L*W*H)	420*280*50mm
Timing Range	1~999min
Standard Accessories	Lamp, UV lamp, 10x observation mirror
Rated Power	1300W
Power Supply	Standard: AC220V 50Hz; Optional: AC110V 50Hz, AC110V 60Hz
External Size(L*W*H)	1460*720*1570mm
Net Weight	185kg
Packing Size(L*W*H)	1620*880*1750mm
Gross Weight	235kg