

Eye Washer


Deck Mounted Eye Washer



EW-DM1



EW-DM2

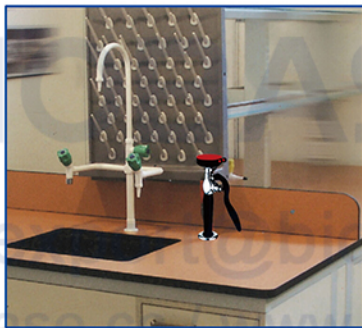

Features:

- * Max. working pressure: 7 bar.
- * Valve: none-return valve, shut off automatically.
- * Hose: length 1.4m, PVC with stainless steel net.
- * Sprayer head: soft rubber, softened water spray for eye protection.
- * Dust shield cap: PP, removed automatically when eye washer is operated.
- * Switch: prompt response makes water coming out within 1 second.
- * Coating: high gloss thick plating coating, resistant to chemicals, UV fading and heat.
- * Body: solid brass
- * More options:
 - 1.Desk/wall mounted available
 - 2.Single/double spray head(s) available
 - 3.Bottle wash available

Technical Parameters:

Model	EW-DM1	EW-DM2
Package Size(W*D*H)	270*170*80mm	370*170*80mm
Gross Weight	1kg	1.5kg

Wall Mounted Eye Washer

- * Material: stainless steel 304
- * Surface finishing: fine-polished
- * Function: wash eyes and face
- * Eye wash switch: two-piece ball valve
- * Nominal pressure: 1.0 Mpa
- * Working pressure: 0.2~0.4 Mpa
- * Testing pressure: 1.5 Mpa
- * Temperature requirement on working environment: 0~40°C
- * Flow rate of eye/face wash: ≥ 11.4 L/min
- * Inlet thread: Rp 1-1/4", female/RP 1/2", female
- * Outlet thread: Rp 1-1/4", female/RP 1", female
- * Package Size(W*D*H): 345*315*260mm
- * Gross Weight: 5kg
- * Notes: the inlet part and outlet part are customizable; shutoff valve and filter are proposed to be equipped on the water-supply end



EW-WM2

Wall Mounted Shower Eye Washer



S-WM2

S-CM3

SEW-WM1

Features:

- * Material: stainless steel 304 /ABS
- * Surface finishing: fine-polished
- * Function: eye and face washing & showing
- * Shower & eye wash switch: two-piece ball valve
- * Pipe diameter: 38/48 mm
- * Inlet thread: Rp 1"1-¼" , female
- * Flow rate of body shower: ≥76 L/min
- * Flow rate of eye/face wash: ≥11.4 L/min

Technical Parameters:

Model	S-WM2	S-CM3	SEW-WM1
Package Size(W*D*H)	820*270*160mm	960*340*140mm	1315*355*250mm
Gross Weight	5.5kg	5kg	18kg