


Constant-Temperature Drying Oven

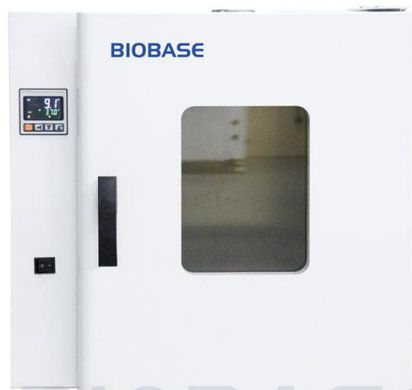

Features:

- * LCD liquid crystal temperature display, with temperature deviation calibration function.
- * Over-temperature alarm and automatic fault detection alarm function.
- * Precisely control the heating time, the timing error is ≤1%.
- * The four corners of the inner cavity are designed with a semi-circular arc structure.
- * The heating device is placed at the bottom, and a new bottom wind plate structure is adopted to facilitate the cleaning of the cavity.

Technical Parameters:

Model	BJPX-HDO43	BJPX-HDO55	BJPX-HDO72	BJPX-HDO138	BJPX-HDO270
Capacity	43L	55L	72L	138L	270L
Heating Method	Bottom heating, natural convection				
Temp. Range	RT+10°C-250°C				
Display	LCD display				
Temp. Uniformity	≤Max temp.±3%				
Temp. Precision	0.1°C				
Timing Range	0-9999min/h				
Inner Size(mm)	350*350*350	370*370*459	400*390*450	500*500*550	660*700*590
External Size(mm)	579*512*510	596*575*618	614*548*609	724*663*709	900*840*890
Shelves NO.	2	2	2	3	3
Consumption	1500W		3000W		
Power Supply	Standard: 220V 50/60Hz; optional: 110V 50/60Hz				
Packing Size (W*D*H)	690*710*660mm	835*710*850mm	830*700*800mm	870*795*850mm	1010*946*1050mm
Gross Weight(kg)	45kg	51kg	55kg	77kg	100kg

Constant-Temperature Drying Oven

Features:

- * External material: cold-rolled steel with anti-bacteria powder coating.
- * Stainless steel inner chamber, round angle structure, adjustable shelves.
- * PID control with LED display, soft touch operational key, timing function and over-temperature protection.
- * Door with double-layer tempered glass observation window, adjustable air-tight buckle lock, and silicon rubber seal, which provide good seal ability and efficiently prevent heat loss.



Technical Parameters:

Model	BOV-T30C	BOV-T70C	BOV-T140C	BOV-T270C
Capacity	43L	70L	137L	270L
Temp. Range	50~200°C			
Temp. Fluctuation	±1°C			
Ambient Temp.	5~40°C			
Timing Range	1~9999min			
Shelves No.	2 pcs		3 pcs	
Consumption	850W	1000W	2000W	3000W
Power Supply	Standard: 220V±10%, 50/60Hz; Optional: 110V±10%, 60Hz			
Internal Size(W*D*H) mm	350*350*350	400*390*450	500*500*550	600*600*750
External Size(W*D*H) mm	635*615*552	680*653*631	830*665*772	930*765*972
Package Size(W*D*H) mm	780*750*700	870*700*800	960*780*950	1060*880*1150
Gross Weight(kg)	60	70	105	145