

Lab Automatic Glassware Washer



BK-LW300P



BK-LW360



BK-LW100P



BK-LW200Pro

Introduction:

Lab Automatic Glassware Washer provides standard and automatic cleaning and disinfection for most of medical equipments, so as to eliminate the possibility of infection in cleaning and disinfecting.

Features:

- * 7.1 inch color LCD touch screen, easy to operate.
- * Provides 12 custom changeable program groups, cleaning programs can be combined at will.
- * With automatic fault diagnosis program.
- * Three-level password permission management for easy supervision.
- * The exterior is made of 304 brushed stainless steel, resistant to corrosion.
- * Standard HEPA filter with filtration efficiency >99.99%.


Technical Parameters:

Model	BK-LW100P	BK-LW200Pro	BK-LW300P	BK-LW360	
Cleaning	Capacity(L)	130	206	308	380
	Washer Load Level	2	4	4	6
	Water Wash Power(kW)	0.75	0.75	1.5	1.5
	Water Heater Power(kW)	2	4	6	6
	MAX. Power(kw)	4	5	7.5	7.5
	Water Consumption/Step(L)	18-24L			
	Tank Internal Temperature(°C)	0~95			
	Water Supply Pressure(Mpa)	>0.2			
	Peristaltic Pump for Cleaning Agent	2			
	Cleaning Agent Level Sensor	YES			
	Washing Pump	Sweden 360L/min			
	Cleaning Racks	Optional			
Drying	Drying Function	YES			
	Steam Condenser	YES			
	Dry Power(kW)	2.4	4	6	6
Control System and Traceability	Control System	7" color LCD touch screen display, MCU		7" color LCD touch screen display, PLC	
	Cleaning Program	7 pre-set programs+12 MCU free programming		7 pre-set programs+6 PLC free programming	
	Password Protection	3 levels password			
	Safety Emergency Button	YES			
	USB port	Optional			
	Integrated printer	Optional			
Dimensions & Weight	Online Monitor Performance of Washing	NO		Optional	
	Chamber Dimension(W*D*H,mm)	560*530*633	552*565*807	690*670*966	680*632*1260
	Exterior Dimension(W*D*H,mm)	908*716*800	907*715*998	701*845*1655	701*845*1785
	Package Dimension(W*D*H,mm)	850*1000*1200	860*1000*1250	920*1060*1900	1080*880*1900
	Net Weight(Host only, kg)	160	170	250	330
	Gross Weight(Host with rack, kg)	180	200	280	320
Others	Door	304 stainless steel			
	Safety Door Lock	YES			
	Built-in RO Water Pump	YES			
	Noise(dB)	<65			
	Voltage(V/Hz)	Standard: 220V, 50Hz; Optional: 110V,50/60Hz; 220V,60Hz (External transformer)	Standard: 220V, 50Hz; Optional: 110V,50/60Hz; 220V,60Hz (External transformer)	Standard: 380V, 50Hz; Optional: 110V,50/60Hz; 220V,50/60Hz; 380V,60Hz (External transformer)	Standard: 380V, 50Hz; Optional: 110V,50/60Hz; 220V,50/60Hz; 380V,60Hz (External transformer)

BK-LW100P and BK-LW200Pro cleaning racks:



BK-LW300P and BK-LW360 cleaning racks:

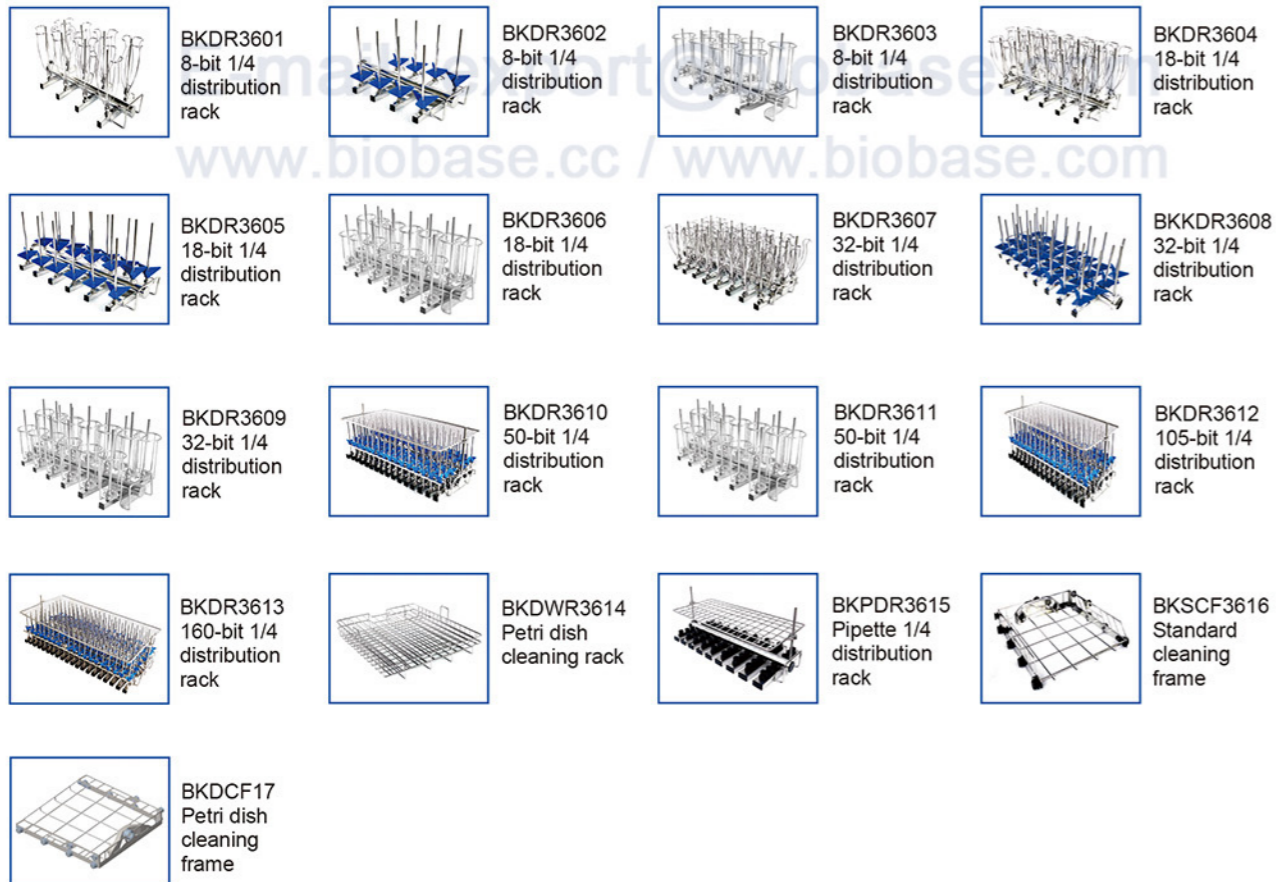

BIOBASE

E-mail: export@biobase.com
www.biobase.cc / www.biobase.com