

Lab Automatic Glassware Washer




Features:

- * 7.1 inch color LCD touch screen, easy to operate.
- * Provides 12 custom changeable program groups, cleaning programs can be combined at will.
- * With automatic fault diagnosis program.
- * Three-level password permission management for easy supervision.
- * The exterior is made of 304 brushed stainless steel, resistant to corrosion.
- * Standard HEPA filter with filtration efficiency >99.99%.


Technical Parameters:

Model		BK-LW100P	BK-LW200Pro	BK-LW300P	BK-LW360
Cleaning	Capacity	120L	206L	308L	380L
	Washer Load Level	1	2	2	3
	Water Wash Power	0.75KW	0.75KW	1.5KW	1.5KW
	Water Heater Power	2KW	4KW	6KW	6KW
	MAX. Power	4KW	5KW	7.5KW	7.5KW
	Water Consumption/Step	18-24L		38-45L	50-55L
	Tank Internal Temperature	0~95℃			
	Water Supply Pressure	>0.2Mpa			
	Peristaltic Pump for Cleaning Agent	2			
	Cleaning Agent Level Sensor	YES			
Drying	Washing Pump	Sweden 275L/min	Sweden 430L/min	Sweden 950L/min	Sweden 950L/min
	Cleaning Racks	Optional			
	Drying Function	YES			
Control System and Traceability	Steam Condenser	YES			
	Dry Power	2.4KW	2.4KW	3.6KW	3.6KW
	Control System	7" color LCD touch screen display, MCU		7" color LCD touch screen display, PLC	
Dimensions & Weight	Cleaning Program	7 pre-set programs+12 MCU free programming		7 pre-set programs+6 PLC free programming	
	Password Protection	3 levels password			
	Safety Emergency Button	YES			
	USB Port	Optional			
	Integrated Printer	Optional			
Others	Online Monitor Performance of Washing	NO		Optional	
	Chamber Dimension(W*D*H)	552*565*500mm	552*565*653mm	690*670*966mm	632*680*1260mm
	Exterior Dimension(W*D*H)	908*716*800mm	909*715*998mm	701*845*1655mm	701*845*1880mm
	Package Dimension(W*D*H)	1000*1100*1100mm	1000*1150*1300mm	950*1100*2000mm	950*1100*2000mm
	Net Weight(Host only)	135kg	155kg	230kg	270kg
Others	Gross Weight(Host with rack)	186kg	210kg	280kg	321kg
	Door	304 stainless steel			
	Safety Door Lock	YES			
	Built-in RO Water Pump	YES			
	Noise	<65dB			
Power Supply		AC220V, 50Hz (Standard); AC110V, 50/60Hz; 220V, 60Hz(External transformer) (Optional)	AC220V, 50Hz (Standard); AC110V, 50/60Hz; 220V, 60Hz (External transformer) (Optional)	AC380V, 50Hz (Standard); AC110V, 50/60Hz; 220V, 50/60Hz; 380V, 60Hz(External transformer) (Optional)	AC380V, 50Hz (Standard); AC110V, 50/60Hz; 220V, 50/60Hz; 380V, 60Hz(External transformer) (Optional)

BK-LW100P and BK-LW200Pro cleaning racks:

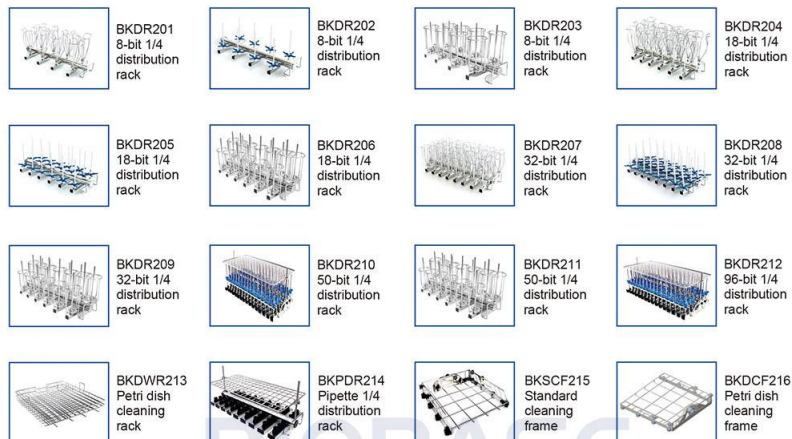

BK-LW300P and BK-LW360 cleaning racks:

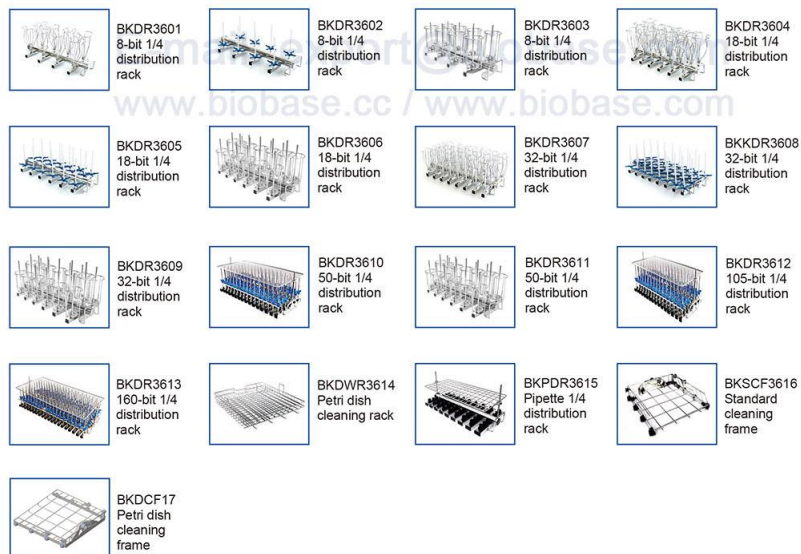

BIOBASE

E-mail: export@biobase.com

www.biobase.cc / www.biobase.com