





## Horizontal Laminar Flow Cabinet



E-mail: [export@biobase.com](mailto:export@biobase.com)  
[www.biobase.cc](http://www.biobase.cc) / [www.biobase.com](http://www.biobase.com)

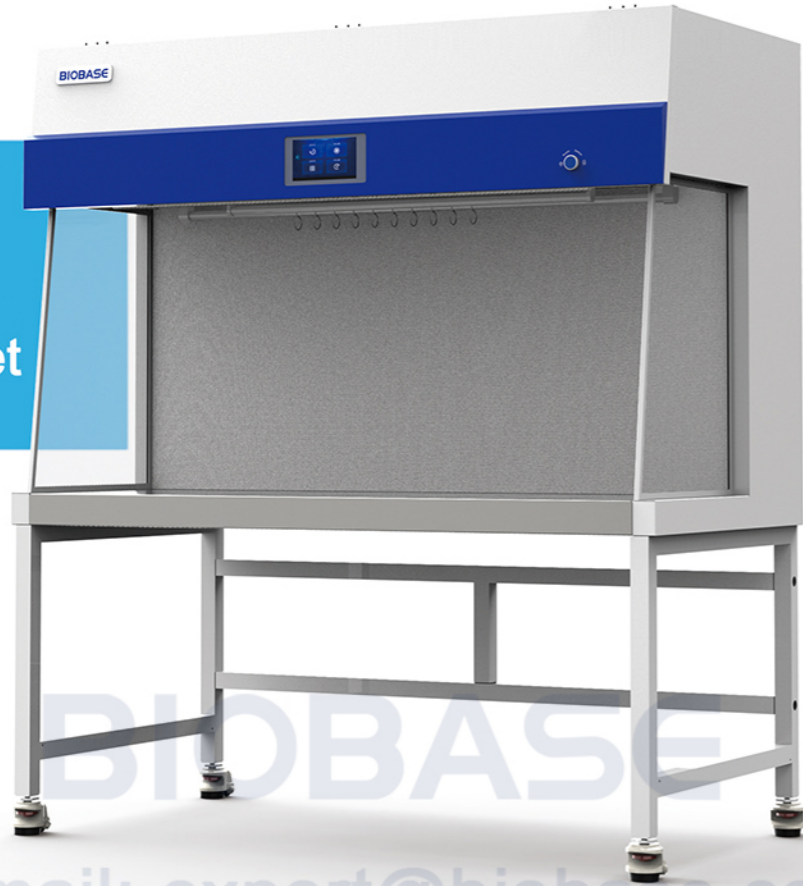

Temperature and Humidity Sensor



UV Lamp



LED Display  
Digital LED Display:  
Airflow Level



Footmaster Caster  
Universal Caster with  
Brake and Leveling Feet



Base Stand



Waterproof Socket

## ADVANTAGE

1. The cabinet is designed with a 10° inclination angle, the operation perspective is wide and more humanized.
2. Made of high quality cold rolled steel plate material, welding structure, surface electrostatic spraying, enhancing the stability of the cabinet.
3. Equipped with initial effect filter, which can preliminarily filter large particulate matter, thus improving the service life of the high efficiency filter.
4. Work surface is made of high quality 304 stainless steel material, beautiful and corrosion resistance.
5. The base bracket and casters are integrated design, which can be moved safely through the casters and can also be fixed and leveled.
6. 7-inch color touch screen, real-time display of running status (air flow direction, air velocity, machine running time, UV lamp running time, high efficiency filter running time, high efficiency filter running resistance, operating area temperature and humidity, clock display) at a glance.
7. With the function of appointment timing, it can automatically set the time of starting and shutting down the laminar flow cabinet and the disinfection time of ultraviolet lamp.
8. With a key disinfection function, convenient and fast, greatly saving the work time and improving the work efficiency.
9. Perfect alarm system:
  - (1) Ultra-high filter pressure alarm: when the filter resistance increases, sound alarm will be issued.
  - (2) Filter failure replacement alarm: when the filter service life expires, there will be a filter replacement sound alarm.

## TECHNICAL PARAMETERS

| Model                 | BKCB-H1500  | BKCB-H1800  |
|-----------------------|---|---|
| Flow Mode             | Horizontal Flow   |   |
| Number of Users       | 1~2   | 1~3   |
| Rated Power           | 1000VA (including operating area socket load 500VA)                                     | 2000VA (including operating area socket load 500VA) |
| Power Supply          | 220V±10%, 50Hz (Standard); 110±10%V, 60Hz (Optional)                                    |   |
| Airflow Velocity      | 0.2m/s~0.45m/s  |   |
| Noise                 | ≤65dB (A)   |   |
| Lighting              | ≥300lx  |   |
| Vibration             | ≤5μm(rms)   |   |
| Safety                | Colonies Number ≤ 0.5CFU/30min  |   |
| Clean Grade           | ISO Level 5 (100 levels)  |   |
| Filtration Efficiency | HEPA (H14) high efficiency filter, filtration efficiency for 0.3μm particle≥99.995%     |   |
| Work Surface Height   | 750mm(Customized)   |   |
| Standard Accessory    | LED lamp*2, UV lamp*2, Base stand, Waterproof socket*2, Temperature and humidity sensor |   |
| Optional Accessory    | Armrest*2   |   |
| Net Weight            | 220kg   | 260kg   |
| Gross Weight          | 299kg   | 355kg   |
| External Size(W*D*H)  | 1500*800*1730mm   | 1800*800*1930mm                                     |
| Internal Size(W*D*H)  | 1400*500*600mm  | 1700*500*730mm                                      |
| Package Size(W*D*H)   | 1760*1010*1340mm  | 2060*1010*1500mm                                    |