


## Atomic Force Microscopy

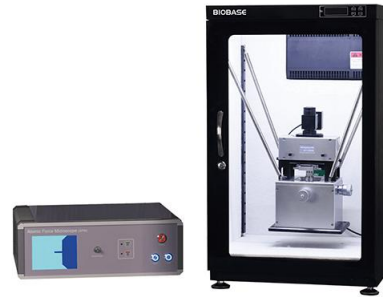

### Features:

- \* Integrated scanning-probe and sample-stage enhances the anti-interference ability of the spring suspension system.
- \* Precision laser and probe positioning device makes probe changing and spot adjusting simple and convenient.
- \* The sample-to-probe auto-approaching provides an efficient way to prevent cantilever crash.
- \* The vertical sample probe approaching allows achieving precise positioning of area of interest.
- \* Sample scanning area of interest may be freely selected with an high-precision/wide-range XY table.
- \* Top-view CCD system warrants real-time observation and positioning of the probe on the selected sample region.
- \* Modular design of electronic control system facilitates maintenance and continuous improvements.
- \* The compact model 2000 may be easily transported inside an aluminum luggage.
- \* The hermetic box in model 1000 provides a controlled environment.

### Technical Parameters:

Model	BK-AFM1000
Working Modes	Contact mode and tapping mode Optional modes: Phase, Friction (LFM), Magnetic (MFM), Electrostatic (EFM)
Sample Size	Φ≤90mm, H≤20mm
Scanners Available	10*10μm, 20*20μm, 50*50μm, 100*100μm
Scanning Resolution	0.2nm in XY direction, 0.05nm in Z direction
Range of Sample Movement	±6.5mm
Step-motor Pulse Width	10±2ms
Image Sampling Points	512*512
Optical Magnification 4X	Optical resolution 2.5μm
Scan Rate 0.6Hz-4.34Hz	Scan angle 0°-360°
Scanning Control	18-bit D/A in XY direction, 16-bit D/A in Z direction
Data Sampling	14-bit A/D, double 16-bit A/D multi-channel synchronous sampling
Feedback	DSP digital feedback
Feedback Sampling Rate	64kHz
Computer Interface	USB 2.0
Operating System	Windows XP/7/8/10
Supply Power	AC220V, 50/60Hz; 110V, 50/60Hz(optional)
Package Size	550*550*1150mm
Gross Weight	65kg