


Automated Tissue Processor

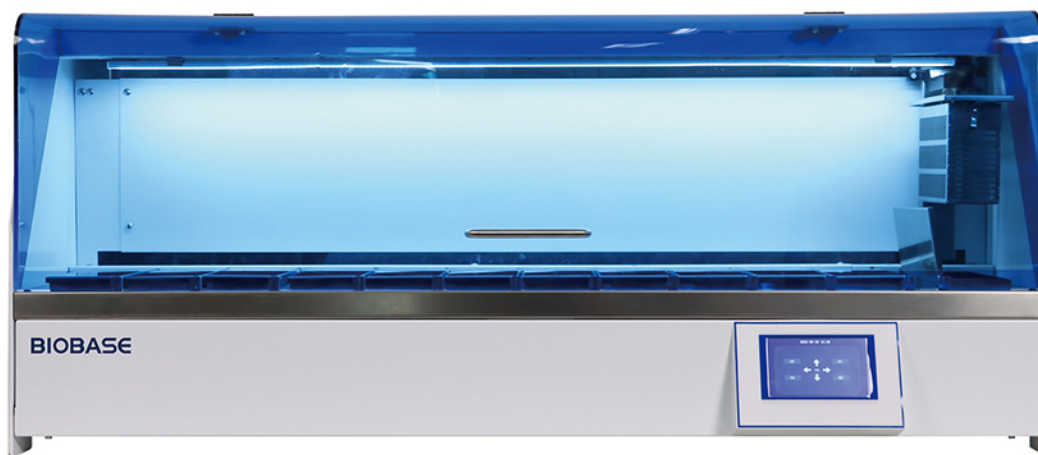

Features:

- * 5.5-inch large LCD touch screen, real-time display of the device working status
- * Rich man-machine dialogue interface, with online help function, easy to learn
- * Tank surface dripping time can be adjusted, reduce the chance of channeling, prolong the use of reagents, reduce pollution
- * Manual operation can be inserted at will, and automatically enter the original running state, convenient to check or add specimens during operation

Technical Parameters:

| Model | BK-TS2B |
|----------------------------|--|
| Cup Number | 12pcs (9pcs reagent cup, 3pcs paraffin cup) |
| Tissue Protective Cup | 1-9th cup can be set |
| Single Cup Capacity | 1800ml |
| Single Cup Processing Time | 0-24h |
| Agitation Frequency | 0-6times/min, adjustable |
| Dripping Time | 0-59s, adjustable |
| Processing Basket Capacity | 100pcs of dehydration cassette |
| Program Storage | 8 sets |
| Noise | 60dB(A) |
| Power | 600W |
| Power Supply | 220V 50/60Hz |
| External Size | 1135*465*490mm |
| Net Weight | 80kg |
| Packing Size | 1320*610*650mm |
| Gross Weight | 83kg |