


## Car Refrigerator

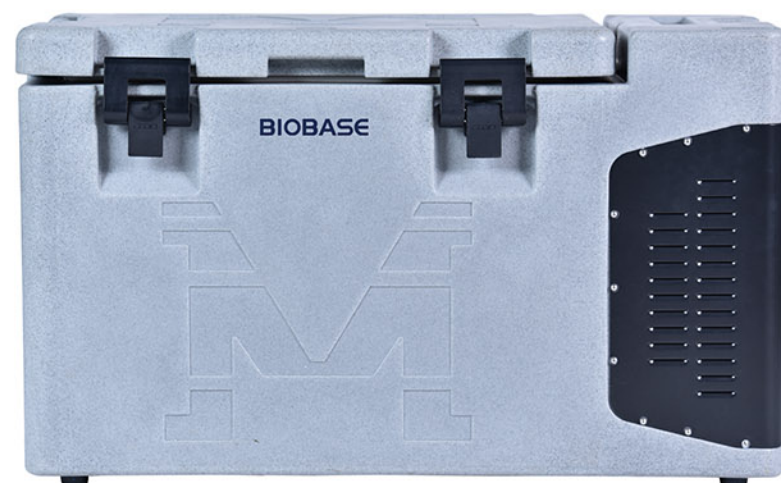


### Features

- \* The exterior is made of PE material, and the box shell is made by rotational moulding process.
- \* Equipped with rotational moulding latch.
- \* LED display can display the temperature in the box and various alarm information.
- \* With Ac and DC power ports.
- \* The box has the characteristics of high strength, easy to clean, corrosion resistance and impact resistance.
- \* With keyboard lock, password protection function to prevent misoperation caused by collision during transportation.
- \* The temperature inside the box ranges from 2 to 8°C.

### Technical Parameters

Model	BCR-5H30C	BCR-5H80C
Volume	30L	80L
Temp. Range	2~8°C	
Temp. Precise	0.1°C	
Refrigeration Type	Forced air cooling, compressor refrigeration, CFC-free	
Climate-Type	SN/N	
Ambient Temperature	10~32°C	
Thermal Insulation Material	High density polyurethane foam, CFC-free	
Alarm system	High and low temperature alarm, sensor failure alarm, power failure alarm, sounds beeped and lights flickered	
Power Supply	AC110V/50Hz or AC220V/50Hz or DC12V	
Power	80W	100W
Power Consumption	1.2kW.h/24h	1.6kW.H/24h
Internal Size(W*D*H)	364*253*352.5mm	547*378*369.5mm
External Size(W*D*H)	615*370*471.5mm	937*565*580.5mm
Package Size(W*D*H)	670*430*520mm	990*630*630mm
Net Weight	22kg	47kg
Gross Weight	26kg	55kg

## Car Refrigerator

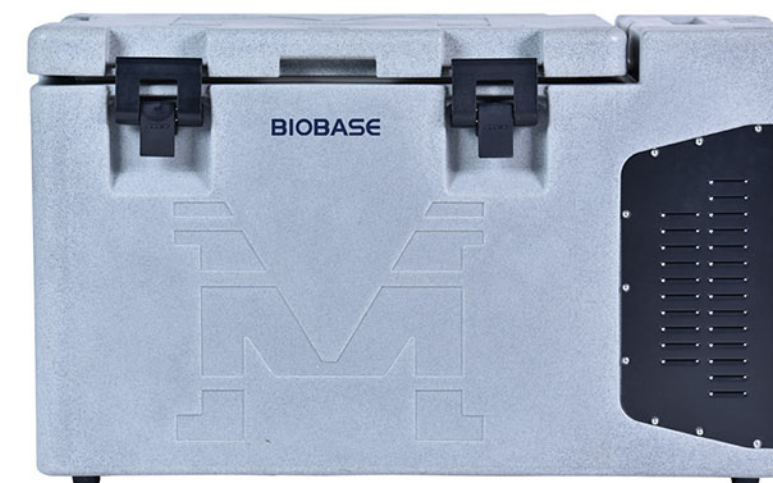

### Features

- \* The exterior is made of PE material, and the box shell is made by rotational moulding process.
- \* Equipped with rotational moulding latch.
- \* LED display can display the temperature in the box and various alarm information.
- \* With Ac and DC power ports.
- \* The box has the characteristics of high strength, easy to clean, corrosion resistance and impact resistance.
- \* With keyboard lock, password protection function to prevent misoperation caused by collision during transportation.
- \* The temperature inside the box ranges from -10 to -25°C.

### Technical Parameters

Model	BCR-25H30C	BCR-25H80C
Volume	30L	80L
Temp. Range	-10~-25°C	
Temp. Precise	0.1°C	
Refrigeration Type	Forced air cooling, compressor refrigeration, CFC-free	
Climate-Type	SN/N	
Ambient Temperature	10~32°C	
Thermal Insulation Material	High density polyurethane foam, CFC-free	
Alarm system	High and low temperature alarm, sensor failure alarm, power failure alarm, sounds beeped and lights flickered	
Power Supply	AC110V/50Hz or AC220V/50Hz or DC12V	
Power	80W	100W
Power Consumption	1.2kW.h/24h	1.6kW.H/24h
Internal Size(W*D*H)	364*253*352.5mm	547*378*369.5mm
External Size(W*D*H)	615*370*471.5mm	937*565*580.5mm
Package Size(W*D*H)	670*430*520mm	990*630*630mm
Net Weight	22kg	47kg
Gross Weight	26kg	55kg