


Multi-chamber Constant Temperature Incubator



BJPX-H150-2C

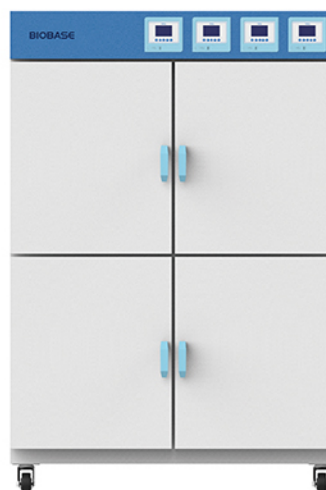

BJPX-H100-4C

Introduction:

Used for the culture of bacteria, cells, microorganisms, etc., suitable for the laboratory of biology, medicine, biochemistry, food, agriculture, environment and other industries.

Features:

- * With two or four chambers of incubator options, effectively save laboratory space.
- * Each chamber is controlled independently, without interference, and the temperature control is accurate and stable.
- * Mirror stainless steel interior for easy cleaning of the chamber.
- * The door of the chamber is equipped with an observation window to facilitate the observation of the experimental process in the chamber.
- * With PID controller, temperature control accurate fluctuation is small, with timing function, the maximum time setting value is 99 hours 59 minutes.
- * Featuring high temperature and over-temperature alarms.

Technical Parameters:

Model	BJPX-H150-2C	BJPX-H100-4C
Chamber Quantity	2	4
Capacity	150L*2	100L*4
Temperature Control Range	RT+5~65℃	
Temperature Resolution	0.1℃	
Temperature Fluctuation	±0.5℃	
Working Environment	5~35℃	
Convection Mode	Forced convection	
Tray	2(Single chamber)	
Standard Accessory	Tray	
Optional Accessory	Independent temperature limit alarm system	
Consumption	1200W	1500W
Power Supply	AC 220V, 50/60Hz(Standard); 110V, 50/60Hz(Optional)	
Internal Size(W*D*H)	560*530*600mm	455*430*510mm
External Size(W*D*H)	705*740*1800mm	1220*616*1620mm
Package Size(W*D*H)	900*870*2000mm	1390*780*1840mm
Gross Weight	220kg	290kg