


Table Top Capacity Shaker

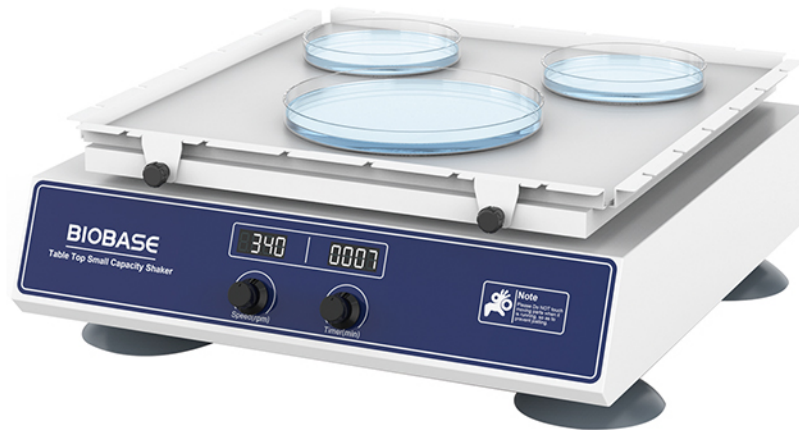

Introduction:

It can be used for continuous shaking of petri dishes, flasks, erlenmeyer flasks, etc. It is suitable for aeration reactions and extraction applications. It can be used inside environmental test chambers or carbon dioxide incubators.

Features:

- * Oscillation speed: 50-500rpm
- * LED display, real-time display of time and speed
- * Selectable timing or continuous operation mode
- * Compact structure, small footprint
- * Driven by a brushless DC motor, quiet and stable operation
- * Maximum load capacity: 7.5 Kg (including fixtures)

Technical Parameters:

Model	BK-YC20
Amplitude	10mm
Oscillation	Rotatory shaking
Display	LED
Shaking Plate Size	320*320mm, 1pc
Max. Capacity	7.5kg(including fixture)
Standard tray configuration	Universal petri dish rack set, with rubber pads and 8 fixing ropes
Speed Range	50~500rpm
Speed Accuracy	±1rpm
Timing Range	1min~99h99min
Consumption	30W
Power Supply	AC100~240V, 50/60Hz
External Size(W*D*H)	365*355*142mm
Package Size (W*D*H)	480*480*250mm
Net Weight	17.5kg
Gross Weight	22kg