


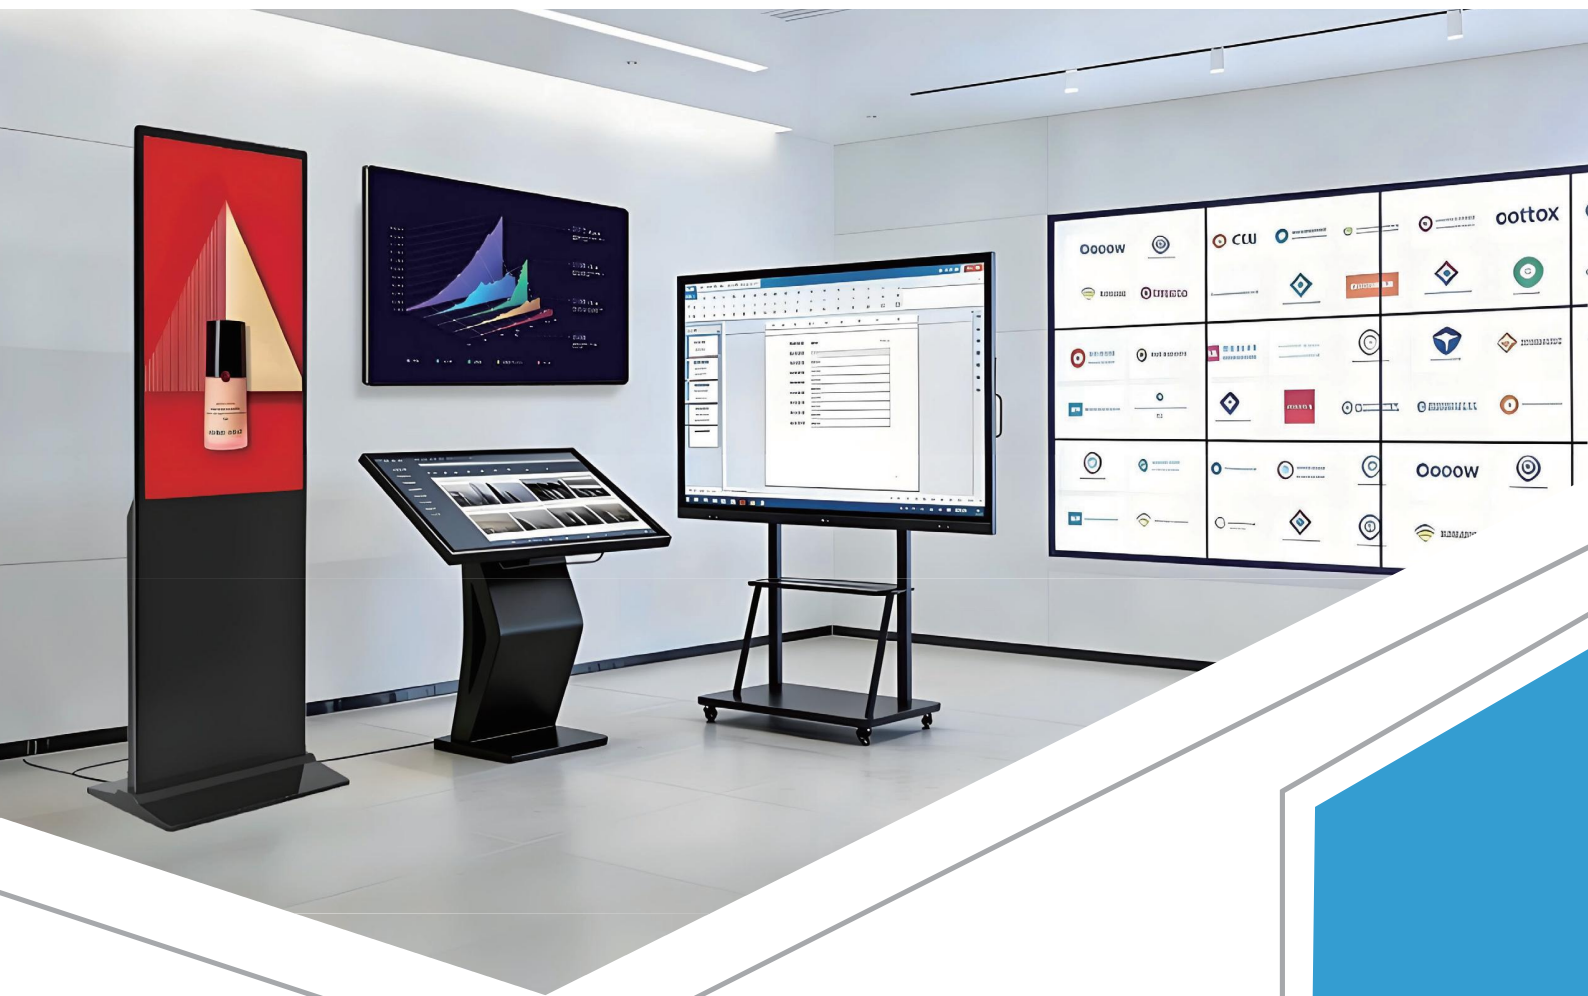

PRODUCT PRESENTATION

GLOBAL LCD MANUFACTURER - YOUR RELIABLE PARTNER

BELOONG

BELOONG TECHNOLOGY GROUP CO., LTD

WWW.BELOONGLCD.COM

COMPANY PROFILE




Beloong Technology Group Co., Ltd. is a professional supplier of a wide range of commercial digital displays. Our main products include: vertical advertising display screens, wall-mounted advertising display screens, interactive whiteboards, LCD and LED portable digital posters, video walls, touch screen kiosks, window high brightness screens, hanging advertising display screens, outdoor vertical digital signage.

Our 6,000-square-meter factory is equipped with advanced automated production lines and precision testing systems, ensuring stable quality and high efficiency. With 54 skilled technicians, we implement strict quality control at every stage.

We not only focus on manufacturing displays but also provide end-to-end solutions tailored to your business goals. Customization options include materials, labels, packaging, colors, sizes, logos, and graphics.



We provide a 12-month warranty, ensure fast delivery and keep sufficient stock in hand. All products are RoHS, CE, FCC, and IC certified, meeting international quality and safety standards.

Our reliable after-sales support ensures smooth operation: 1-hour response time, 8-hour remote fix, professional technical assistance, free software updates, maintenance guidance, and quick replacement-parts supply.

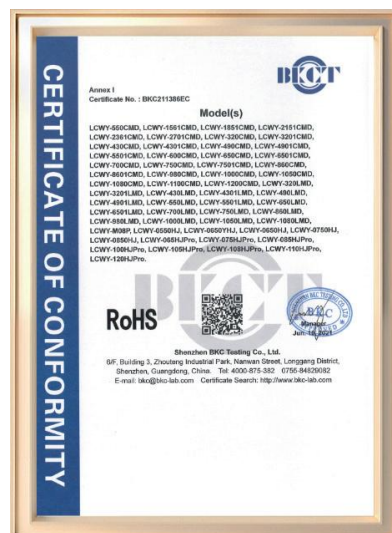

LCD ADVERTISING PLAYER INDOOR

- ▶ Support ODM/OEM, customized LOGO freely
- ▶ Free CMS to publish the information for lifetime
- ▶ 4K resolution, high definition
- ▶ Support the split screens
- ▶ 7*24 hours loop play

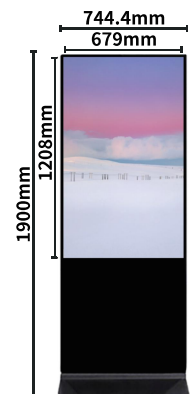


*Note: Dimensions may vary by batch, final size as shipped



PRODUCT PARAMETER

Display Resolution	1920*1080/3840*2160	Contrast	1400:1typ
Brightness	300-700cd/m ²	Image Ratio	9:16
Input Voltage	AC110-240V 50HZ-60HZ	Color	16.7M
Touch Screen Sensing	Finger	Visual Angle	178°
Touch Type	Infrared touch/ Capacitive touch/ Non-touch		
Number of Touches	More than 60 million times in the same location		
Responding Speed	Click 8ms Continuous: 3ms		
System	Android / Windows		
Play Mode	Support multiple playback modes such as looping, timing, interstitial, etc.		
Decoding Resolution	Support up to 3840*2160		
Split Screen Playback	Support horizontal screen, vertical screen, full screen and split screen playback		
Time Switch Play	5 switches per day, seven days a week can be set up, 24 hours unmanned management		
Audio Sound	Left channel right channel, 8Ω 5W *2 speaker		
Support Subtitles	You can set mobile subtitles, and play subtitles in commercials		
Image Format	Support JPG, BMP, PNG, GIF and other image format		
Play File Format	Video: All video formats Music: MP3		

APPLICATION

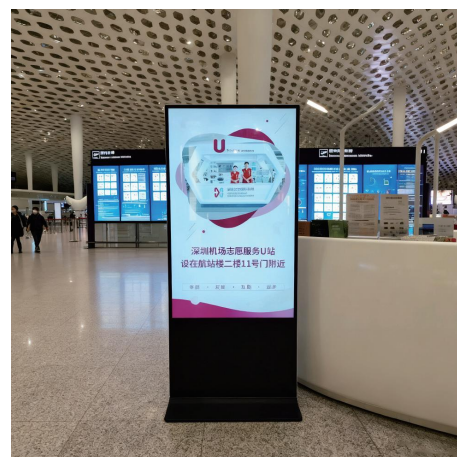

PORTABLE ADVERTISING DISPLAY

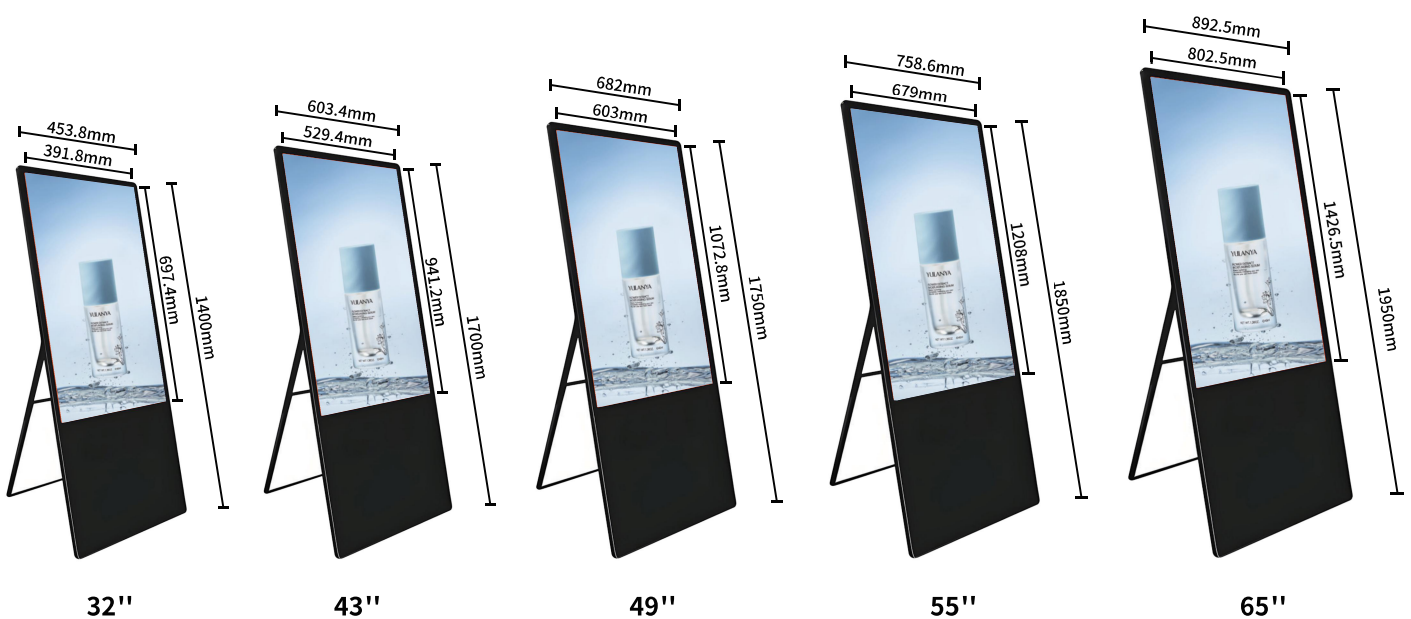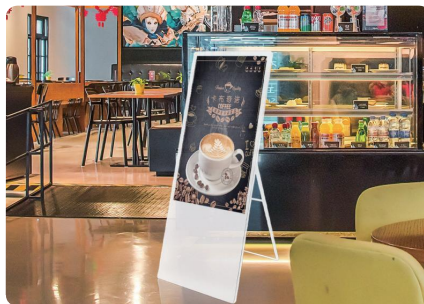

*Note: Dimensions may vary by batch, final size as shipped

PRODUCT PARAMETER

Size		32" 43" 49" 55" 65"
Parameter	Display Resolution	1920*1080/3840*2160
	Contrast	1400:1typ
	Brightness	300-700cd/m ²
	Image Ratio	9:16
	Visual Angle	178°
	Color	16.7M
	Input Voltage	AC110-240V 50HZ-60HZ
Touch Screen	Touch Type	Infrared touch/ Capacitive touch/ Non-touch
	Touch Screen Sensing	Finger
	Number of Touches	More than 60 million times in the same location
	Responding Speed	Click 8ms Continuous: 3ms
Play System	System	Android / Windows
	Play Mode	Support multiple playback modes such as looping, timing, interstitial, etc.
	Decoding Resolution	Support up to 3840*2160
	Split Screen Playback	Support horizontal screen, vertical screen, full screen and split screen playback
	Time Switch Play	5 switches per day, seven days a week can be set up, 24 hours unmanned management
	Audio Sound	Left channel right channel, 8Ω 5W *2 speaker
	Support Subtitles	You can set mobile subtitles, and play subtitles in commercials
	Image Format	Support JPG, BMP, PNG, GIF and other image format
	Play File Format	Video: All video formats Music: MP3

LED PORTABLE ADVERTISING DISPLAY

- ▶ High brightness, 3840Hz refresh rate
- ▶ Seamless screen splicing
- ▶ Free CMS
- ▶ GOB waterproof modules for easy maintenance
- ▶ Supports multiple media formats
- ▶ Size: 1920×640mm
- ▶ Foldable version optional




APPLICATION





LED POSTER

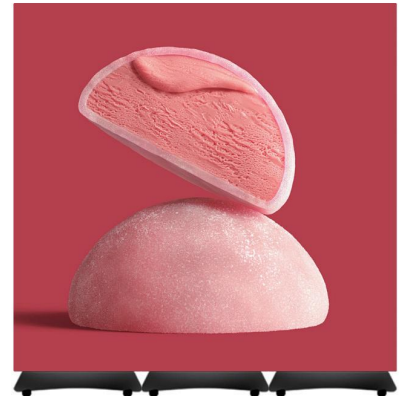

LED





WALL MOUNTED ADVERTISING MACHINE

- ▶ Free CMS for lifetime
- ▶ Long service life
- ▶ Split screens function available
- ▶ Various display materials possible








APPLICATION

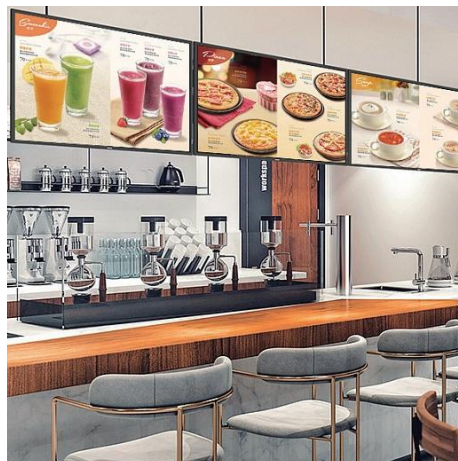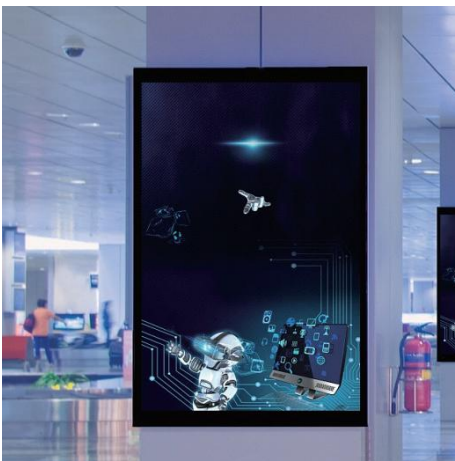



PRODUCT PARAMETER

Screen Size	10.1”	13.3”	15.6”	18.5”	
	21.5”	23.6”	23.8”	27”	32”
Display Resolution	1920*1080				
Screen Size	43”	50”	55”	65”	75”
	85”	86”	98”	100”	110”
Display Resolution	1920*1080, 3840*2160				
Contrast	1400:1typ				
Brightness	300-700cd/m²				
Image ratio	16:9 (9:16)				
Perspective	178°				
Color	16.7M				
Input Voltage	AC110-240V (50Hz-60Hz)				
Touch Type	Non-touch		Infrared touch		
	Capacitive touch				
System	Andriod / Windows / OPS				

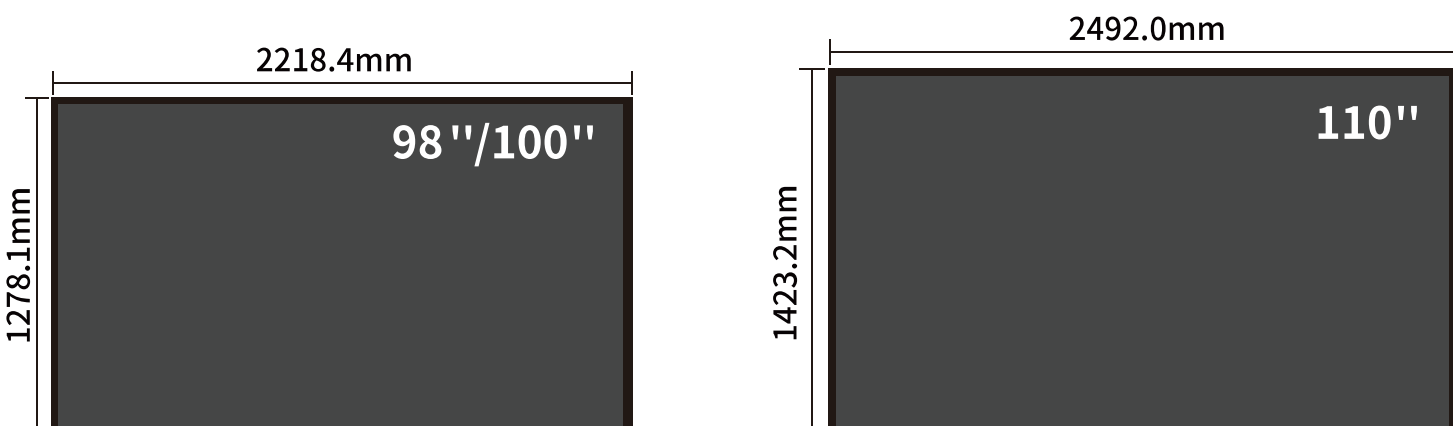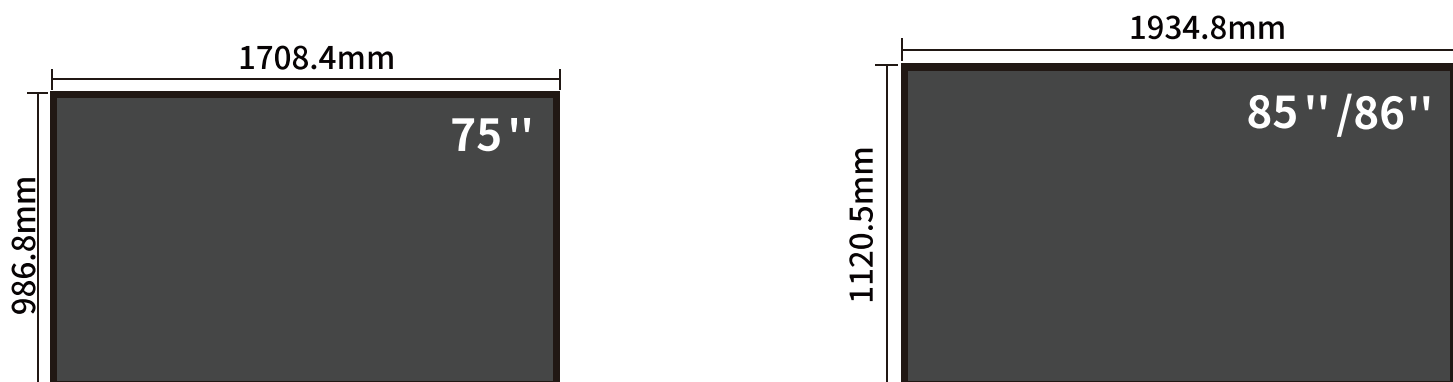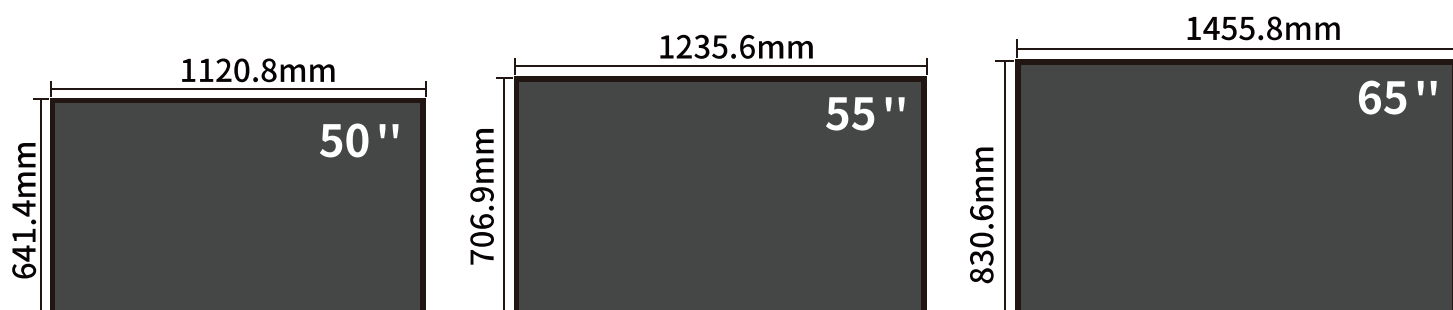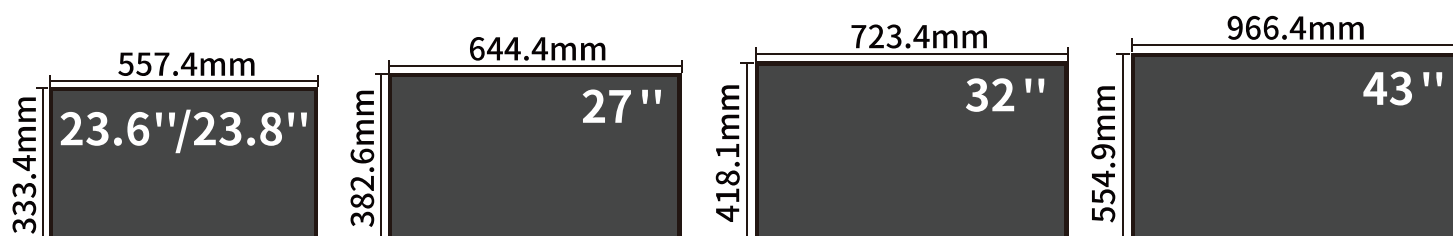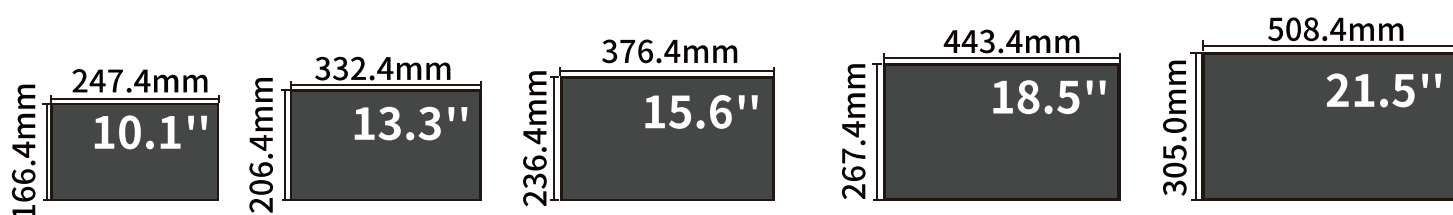

*Note:Dimensions may vary by batch, final size as shipped





ELEVATOR ADVERTISING MACHINE

- ▶ Free CMS for lifetime
- ▶ Horizontal or vertical type
- ▶ Single or dual screens optional
- ▶ Support the customized LOGO



MORE STYLES



INTERACTIVE WHITEBOARD

- ▶ 4K resolution
- ▶ Android 14 and Windows 11 dual systems
- ▶ Wireless projection
- ▶ Built in camera for conference
- ▶ 40 points multi-touch



Front



Side









Back




PRODUCT PARAMETER

Display	Screen Ratio	16:9
	Physical Resolution	3840x 2160 UHD
	Brightness	350-450cd/m ² (center point)
	Contrast	1200:1 (Typ.) transmission
	Display Color	8 bit/16.7 Million
	Viewing Angle	178°,178°
	Refresh Rate	60Hz
	Corresponding Time	8ms
	Audio Output Power	8Ω10W x2
	Optional	Camera/Wireless screen projector/ Retractable pointer/Mobile bracket/Smart pen
	Touch Type	Infrared touch screen
	Touch Points	40 touch points
Touch	Touch Writing Surface Material	4mm tempered glass
	Touch Screen Sensing Method	Fingers or other non-transparent touch-sensitive media
	Detection Function And Calibration	With software automatic detection function
Specifications And Parameters	Installation Method	Wall-mounted or Mobile Stand optional
	Front Interface	USB/HDMI in/Type-c
	Storage Environment	Storage temperature: -20°C~60°C; storage humidity: 10%RH~90%RH
	Working Environment	Working temperature: -10°C~55°C; Working humidity: 10%RH~90%RH
	Service Life	≥50000 hours

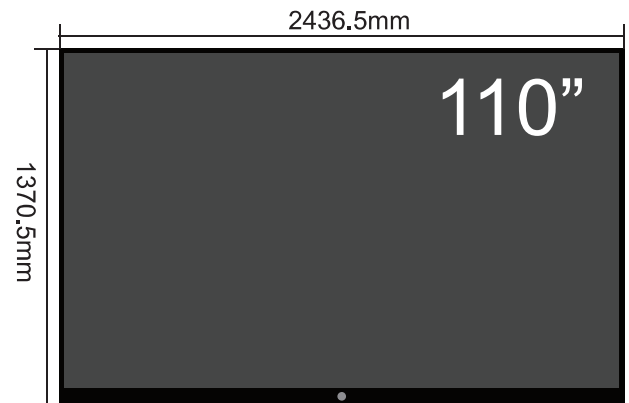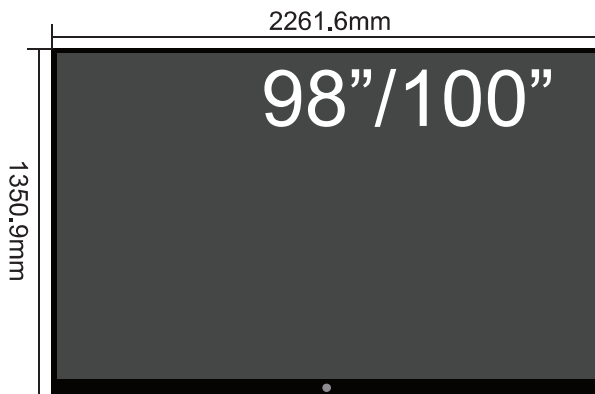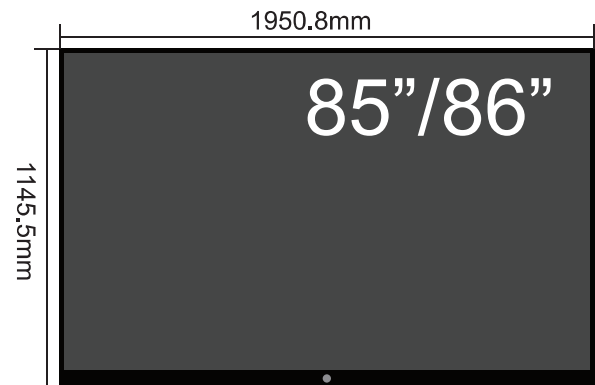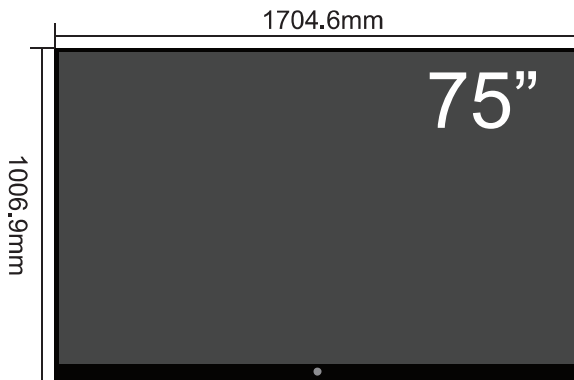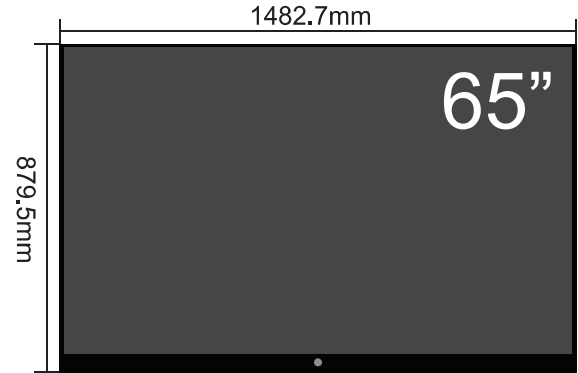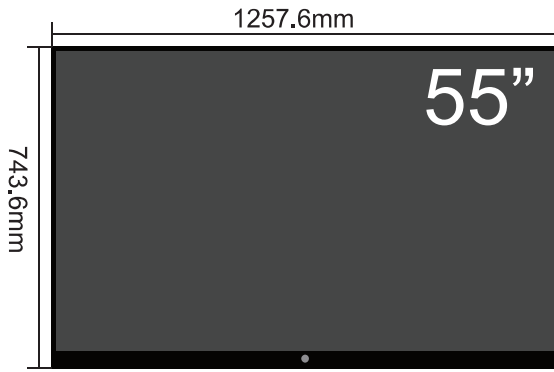

*Note:Dimensions may vary by batch, final size as shipped


APPLICATION

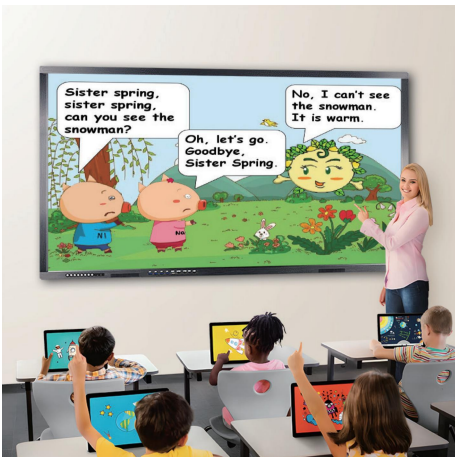



TOUCH QUERY ALL IN ONE MACHINE

- ▶ Customized shapes/colors/bases
- ▶ Rich interfaces, accurate IR/PCAP touch
- ▶ 178° wide viewing angle
- ▶ Android / Windows system optional
- ▶ 10 points multi-touch



PRODUCT PARAMETER

Display	Display resolution	1920*1080/3840*2160
	Contrast	4000:1typ
	Maximum brightness	350-700cd/m ²
	Image ratio	16:9
	Perspective	178°
	Color	16.7M
	Input voltage	AC110-240V (50Hz-60Hz)
Screen	Touch type	Infrared/Capacitive touch
	Number of touches	More than 60 million times in the same location
	Responding speed	Click: 8ms Continuous: 3ms
Specification	Motherboard	X86 motherboard
	RAM	4G
	ROM	128G
	System	Windows system
	Audio	Onboard RTL ALC269 HD sound card
		Audio input; MIC input
		2.0 4Pin speaker output 2W*2
	Display interface	HDMI 1 Type-A female connector 3840*2160@60Hz
		VGA 1 standard VGA female connector 3840*2160@60Hz
	Network port	1 standard RJ45 interface 10M/100M/1000M adaptive
		Onboard RTL8111F Gigabit LAN
	System functions	Support diskless startup, network wake-up, power on, watchdog and other functions
	Language	Simplified Chinese, Traditional Chinese, Japanese, European OSD languages etc.
Video	Switch machine	Manual switch machine, automatic timing switch machine.
	Maximum resolution	3840*2160@60Hz
	The largest color depth	24bit
	The biggest frame rate	30frm
	The largest stream	USB2.0 device:20Mbit/sec




SELF SERVICE KIOSK

- ▶ Android or Windows OS
- ▶ Optional: QR scanner, printer, camera, NFC, POS holder
- ▶ Wall-mounted or floor-standing installation
- ▶ Multiple size options
- ▶ Free API SDK for integration
- ▶ Ideal for malls, restaurants, hospitals, banks, and hotels



APPLICATION

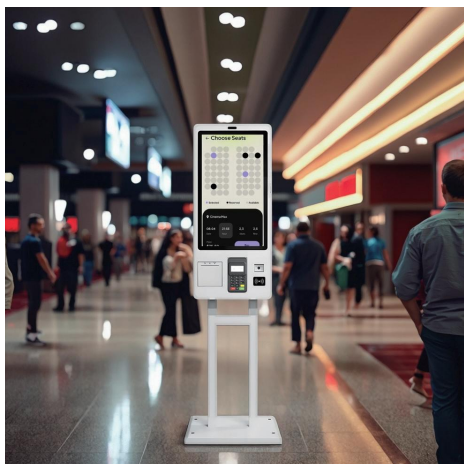

PRODUCT PARAMETER



Size	21.5" 23.8" 27" 32" 43"		
Screen Ratio	16:9	Refresh Rate	60Hz
Brightness	250-350 cd/m ²	Response time	14 (Typ.)(G to G) ms
Display Solution	1920 (RGB) ×1080[FHD] 92 PPI		
Contrast	1200:1(Typ.) transmission		
Viewing Angle	89/89/89/89 (Typ.)(CR≥10)		
Touch Solution	Capacitive G+G touch technology		
Writing Style	Finger or capacitive touch pen		
Positioning accuracy	More than 90% of the touch area is ±2mm		
Optional	Printer/QR Code Scan/Camera		
Number of touches	Theoretically unlimited times		
Drivers	Automatic system recognition, no need to drive		
Reaction time	< 8ms	Touch resolution	32767*32767
System	Windows	Motherboard solution	1356-TI4
Memory	DDR4-2133 8GB	Harddisk	SSD 128GB
Trumpet	≤85W	Color	White
Maximum power consumption rate	8Ω5W*2	Standby power	≤0.5W
CPU	Intel Core i5 8250U 4 cores 8 threads, main frequency 1.60 GHz		
IO/Interface	HDMI out*1/VGA out*1/USB3.0*4/RJ45*1/AUDIO*1/mic*1		
Graphics card	Intel® UHD Graphics 620		
Network	10M/100M/1000M adaptive Ethernet		
Shell material	Full sheet metal structure design		

LCD VIDEO WALL

- ▶ BOE/LG/Innolux original A+ panel
- ▶ Customized LOGO freely
- ▶ Free technical guidance and solutions for lifetime



TOPOLOGY CHART

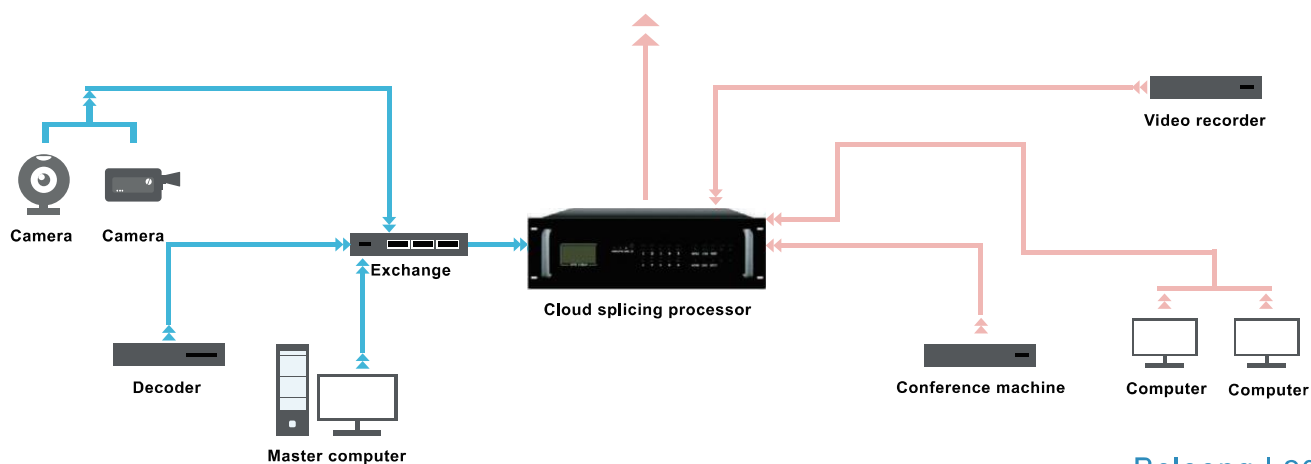

PRODUCT PARAMETER

Description	46”			49”	55”			65”
Bezel	3.5mm	1.7mm	0.88mm	3.5mm	3.5mm	0.88mm	1.7mm	3.5mm
Size of screen	1022x576.6mm	1020x574.6mm	1019x573.6mm	1077.6x607.8mm	1213.7x684.5mm	1211.5x682.3mm	1210.51x681.22mm	1432.5*807.6mm
Resolution	1920*1080				Frequency	60Hz		
Contrast ratio	4000:1	4000:1	4000:1	4000:1	3000:1	3000:1	3000:1	3000:1
Color saturation	97%				Brightness	500cd/m2		
Display color	16.7M				Viewing angle	178°		
Working temperature	0℃ -50℃				Working humidity	20%-80%		
Power	AC100-240V, 50/60HZ				Shelf life	≥60000H		
Control signal type	RS232				Start time	≤8ms		
Response time	2ms				Image ratio	16:9		
Port	AV , VGA, DVI, HDMI, BNC				Backlight	Straight down LED		
Cover material	Full metal shell, anti-static, anti-magnetic field, anti-interference from strong electricity							
Installation	Cabinet, Wall-mounted, Movable type, Hydraulic front maintenance, etc							

INSTALLATION METHOD



Hydraulic front maintenance



Cabinet mounted




Moveable bracket



OUTDOOR ADVERTISING MACHINE



APPLICATION

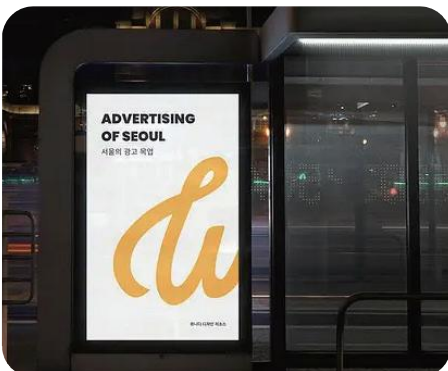

PRODUCT PARAMETER

Cooling Method	Air Conditioning /Cooling Fan		
Protection Level	IP65/IP66	Power Input	AC 100V~240V
Door Opening Method	Rear door	Resolution	4k
Glass (default)	Super white full rigidity	Viewing Angle	178°
Response Time	8ms	Modular Socket	Triple
Brightness	3000 nits	Backlight Mode	LED direct type
Sower Supply	Industrial Meanwell Power	Speaker	Waterproof speaker
Lightning Protection	Three-level lightning protection		

MORE STYLES







LCD STRETCHED BAR SCREEN



APPLICATION

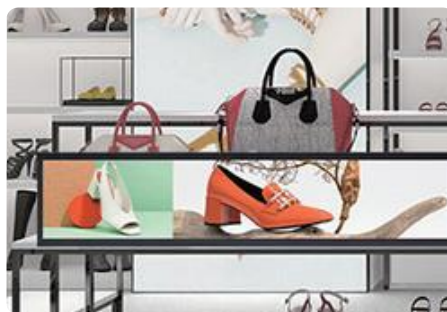

FULL SCREEN ADVERTISING MACHINE

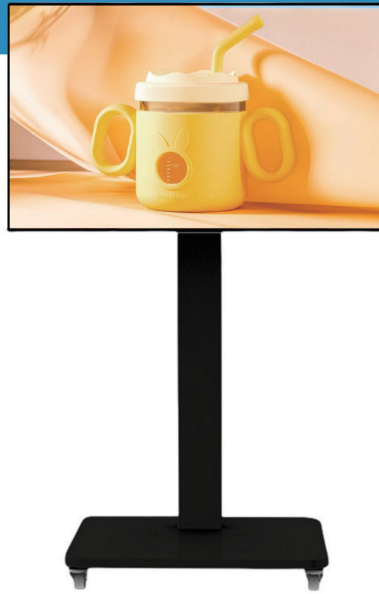


APPLICATION





DOUBLE-SIDED HANGING ADVERTISING DISPLAY

- ▶ Vertical/ Horizontal display mode
- ▶ Crystal glass frame
- ▶ Top hanging installation mode
- ▶ Smart split screen and console box
- ▶ Android system with free CMS

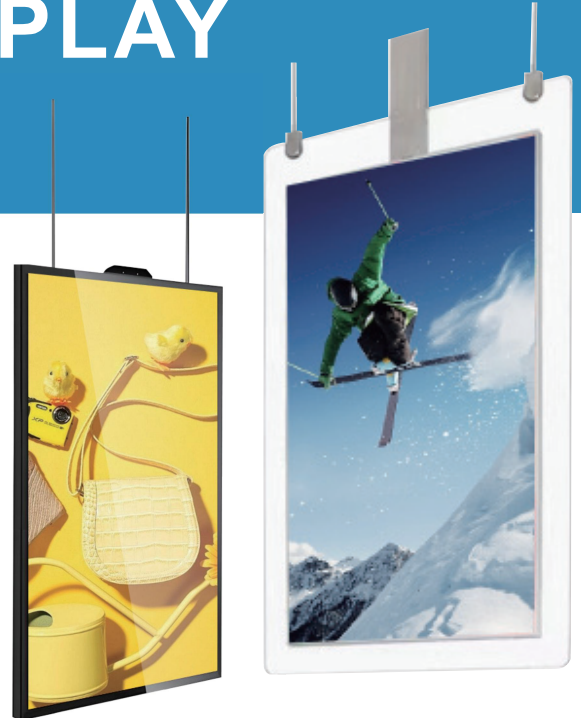

APPLICATION




DOUBLE SIDED ULTRA-THIN DIGITAL KIOSK

- ▶ Screen ultra-thin thickness 20mm
- ▶ Base style can be customized
- ▶ Double sided display
- ▶ The double-sided display can be same or different contents




APPLICATION

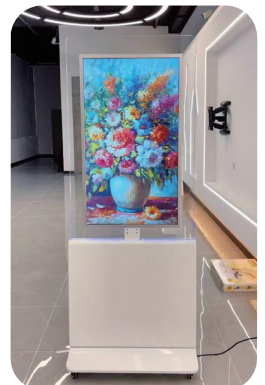

WINDOW DISPLAY

- ▶ Higher brightness, 700-5000nits
- ▶ Double sided, display same/different contents
- ▶ Customized photosensitive module

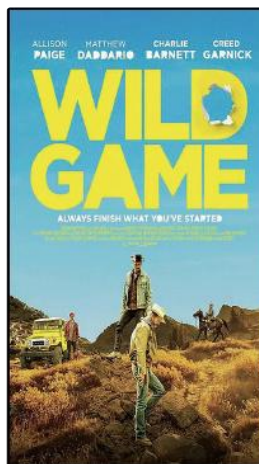

APPLICATION



SMART MOVEABLE TOUCH SCREEN DISPLAY



- ▶ 90° rotation
- ▶ Equipped with wheels for easy movement
- ▶ Anti-glare screen, effective eye protection
- ▶ Built-in lithium battery for longer battery life
- ▶ Compatible with multiple Apps

APPLICATION


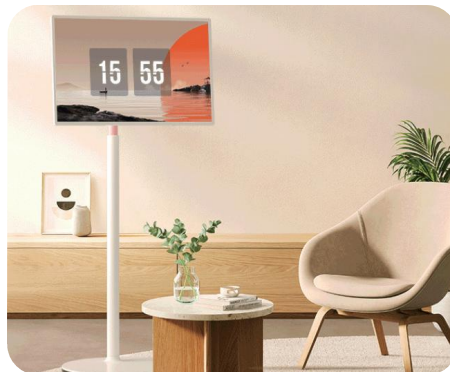




PHOTO FRAME ADVERTISING DISPLAY

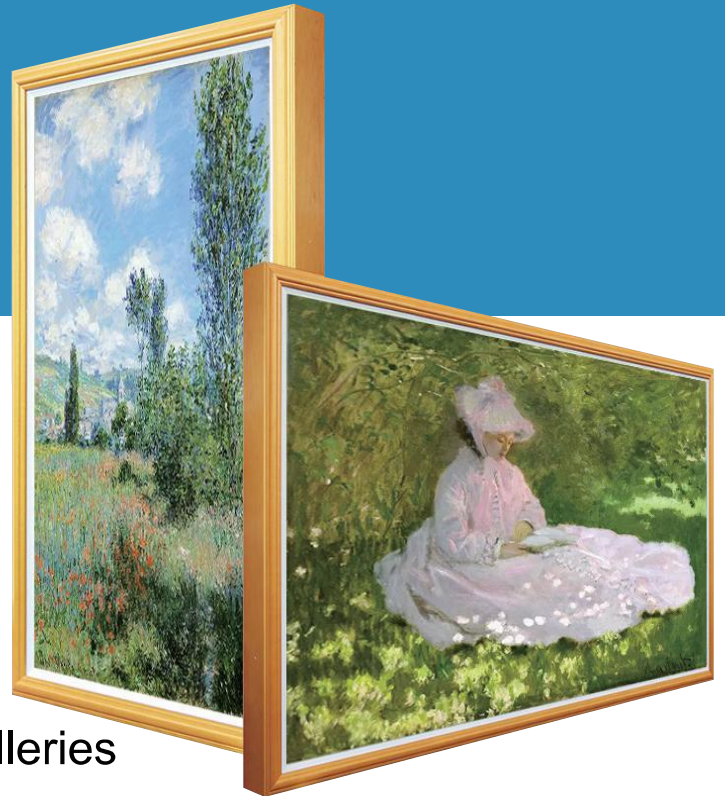


- ▶ High definition display
- ▶ Anti-glare screen
- ▶ Different colors available
- ▶ Fashionable appearance
- ▶ Applicable to exhibition halls, galleries and other places


APPLICATION







CUSTOMIZED PRODUCT







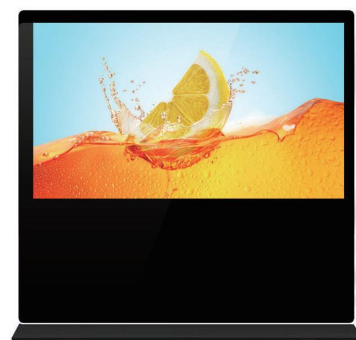



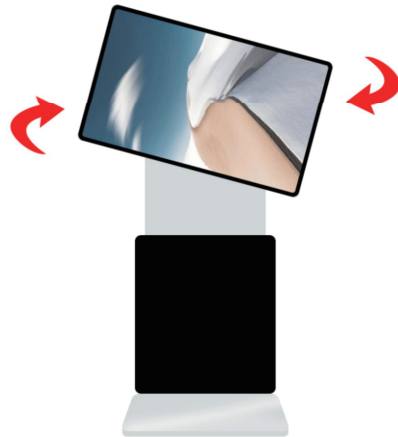


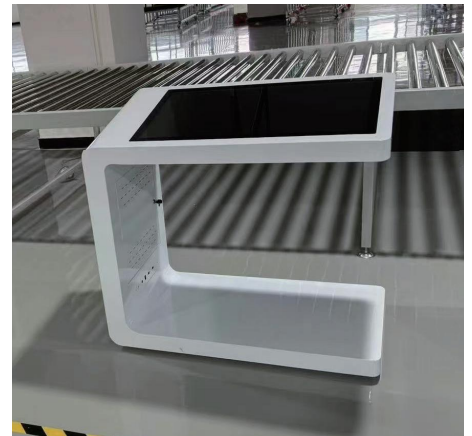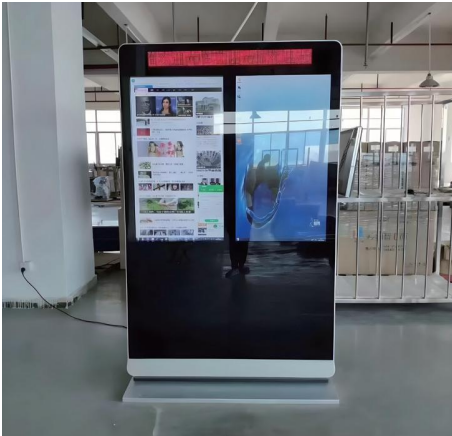




CUSTOMER FEEDBACK

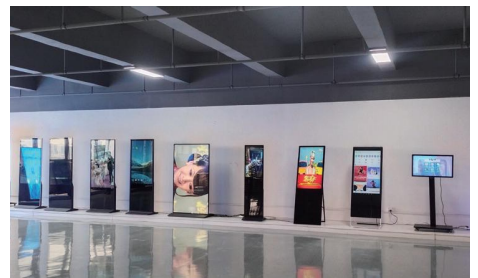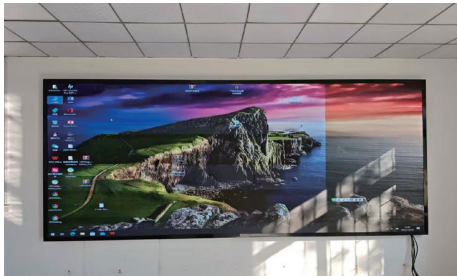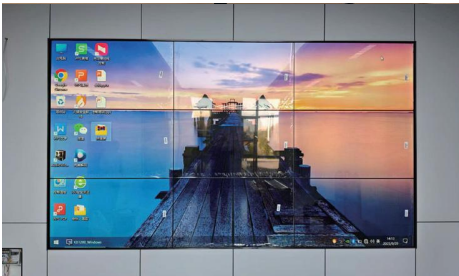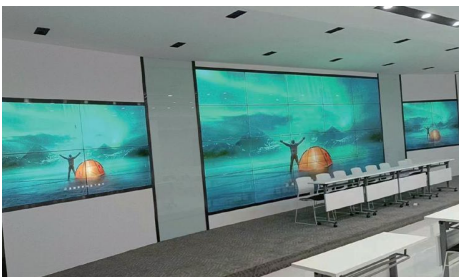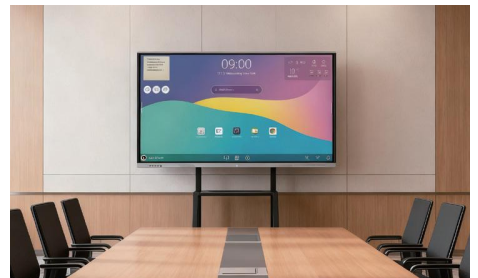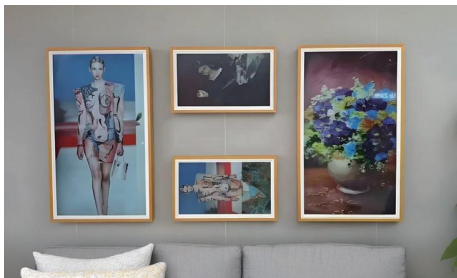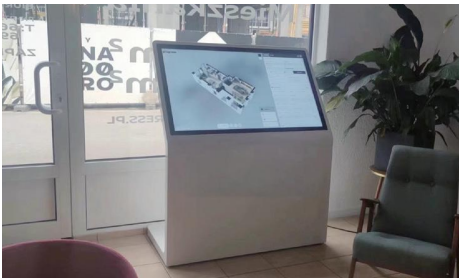

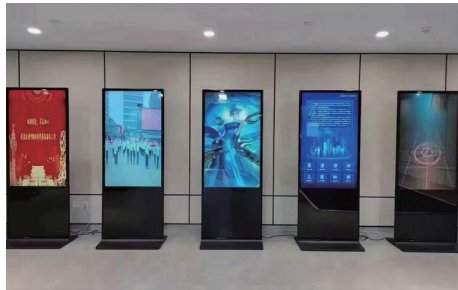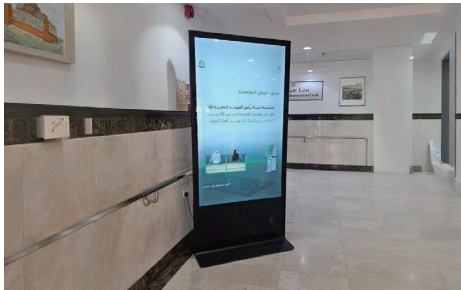




BUSINESS PARTNER

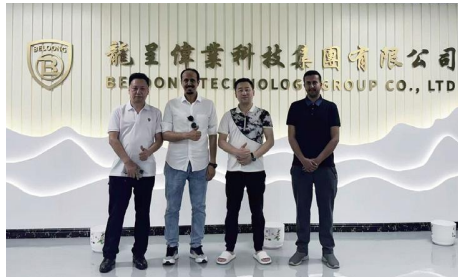






EXHIBITION

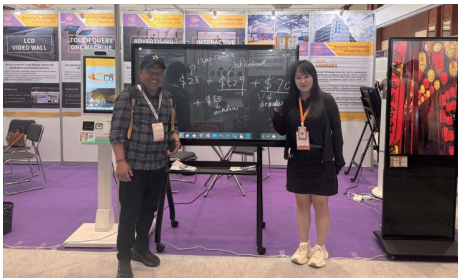



FACTORY

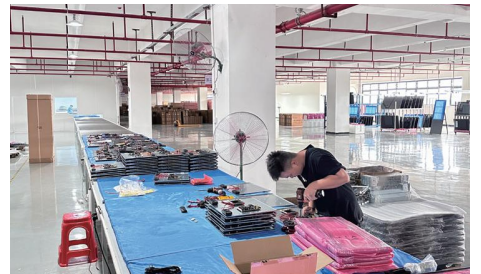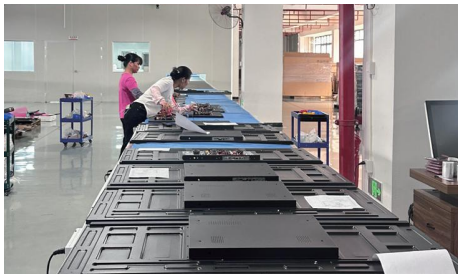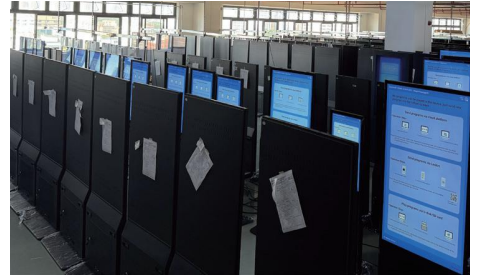



WWW.BELOONGLCD.COM



Beloong Technology Group Co., Ltd.

Address: No. 600, Nanling Village, Lixiang Street,
Hunnan District, Shenyang



Dongguan Beloong Technology Co., Ltd.

Address: Room 702, No. 2-2, Qianmei Road, Dongkeng Town,
Dongguan City, Guangdong Province