


Interactive tablet specification (65~86 inches)

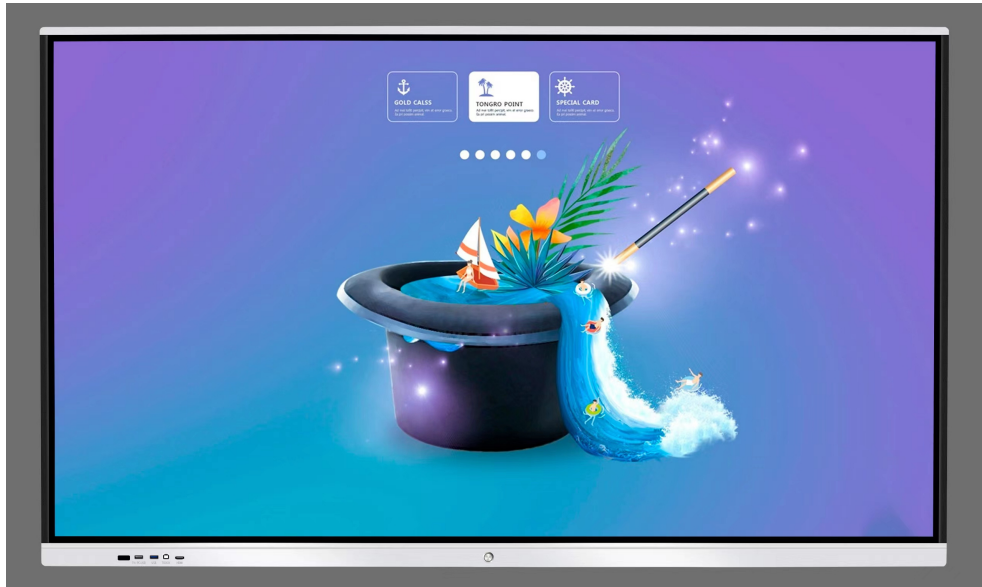

Product Features			
Screen size	65inches	75inches	86inches
Colour	Silver+black (fine matte frame + hardware back cover)		
Display protection	4mm ordinary explosion-proof glass		

1 Product Parameters


Android system hardware configuration	
Main chip model	T982
Central Processing Unit (CPU)	Quad-core ARM Cortex-A55
Operating memory (RAM)	4GB
System memory (ROM)	64GB
Kernel version	Android 11.0
Touch recognition method	Built-in infrared light touch recognition
Automatic brightness adjustment	Support environmental light-sensitive function, can achieve 8-level linear dimming
Mainboard input/output interface configuration	
USB input	<ul style="list-style-type: none">➤ 4 channels (including 1 channel Type-A USB2.0, 1 channel Type-C USB2.0)➤ 1 way A type USB3.0 (front 1 way)

USB output	<ul style="list-style-type: none"> ➤ 2 way B type For VGA & HDMI1,2 Touch out)
Audio input	<ul style="list-style-type: none"> ➤ 1 PC-VGA audio (standard:3.5mm)
Audio output	<ul style="list-style-type: none"> ➤ 1 digital coaxial (RCA) ➤ 1 earphone/Line out (standard: 3.5mm)
Network input	<ul style="list-style-type: none"> ➤ 1 RJ45 wired network port (support transparent transmission to OPS to achieve global Internet access through a network cable) ➤ 3 external Wi-Fi antenna interface [including 2 standard 5G hotspots]
Centralized control interface	<ul style="list-style-type: none"> ➤ 1 RS232 serial port
Video input	<ul style="list-style-type: none"> ➤ 1 VGA ➤ 3 HDMI [including 1 front panel] ➤ 1 channel YPbPr (Mini 3 in 1) ➤ 1 channel AV (Mini 3 in 1)
Video output	<ul style="list-style-type: none"> ➤ 1 set of AV out (Mini 3 in 1 jack)

Electrical performance of the whole machine	
power input	AC 180-240V 50/60Hz
Power consumption of the whole machine (Standard mode does not include computer)	<ul style="list-style-type: none"> ➤ 65 inches: 240W (DLED models) ➤ 75 inches: 320W (DLED models) ➤ 86 inches: 350W (DLED models)
Speaker power	Stereo hybrid dual-channel CLASS-D power amplifier output, rated power: 2x10W (L+ R / 8 Ω) of THD+N \leq 10% @ 1KHz (Audio Input: 0.5VRMS)

2 Product Specifications

Display Performance Parameters

Product size	65inches	75inches	86inches
Backlight type	DLED		
Display size (mm)	1582*190*990mm	1822*245*1137mm	2068*245*1565mm
Physical resolution	4K UHD (3840 x 2160)		
Peak brightness of the whole machine		350cd/m ² ±50	
Dynamic contrast	5000: 1		
Viewing angle	H/V: 178/178°		
screen ratio	16:9		
Display color	10Bit, 16.7M		

Structure size (unit: mm)


Product Size	65inch	75inch	86inch
Overall dimensions	L1498xH918 x W96	L1723xH1044x W99	L1965xH1180x W99
Carton size	L1660xH1065xW225	L1875xH1185xW225	L2115xH1325xW225
Net weight of bare metal (Kg)	45	58.5	77
Gross weight (Kg)	59	73.5	95
VESA hole size	400 x 300	600 x 500	600 x 600

Wall-mounted screw specifications	M8 x L25 x 4 pcs
-----------------------------------	------------------


Matching different LCD glass models, the peak brightness of the whole machine will be different, the data identified in this specification is for reference only! There will be slight errors in the packaging data in the above table, and the actual screen size of the production carton shall prevail!

3 Six-sided view


3.1 Installation size (65inches)

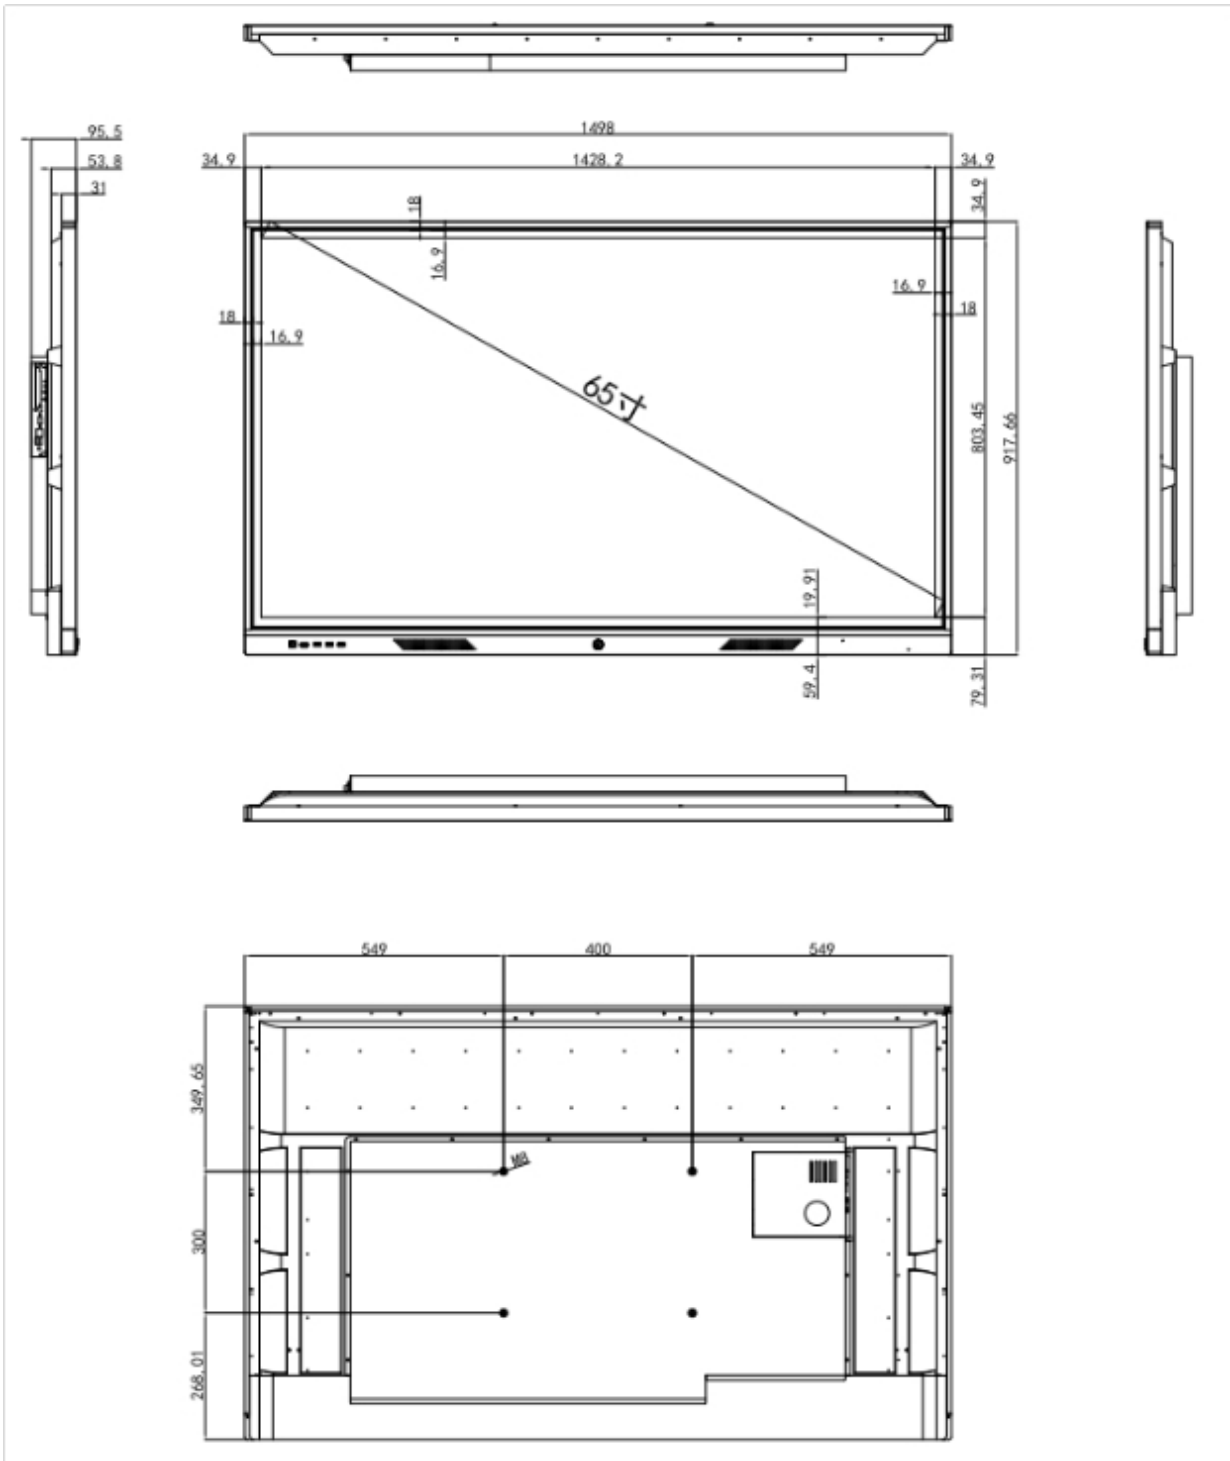

3.2 Installation size (75inches)

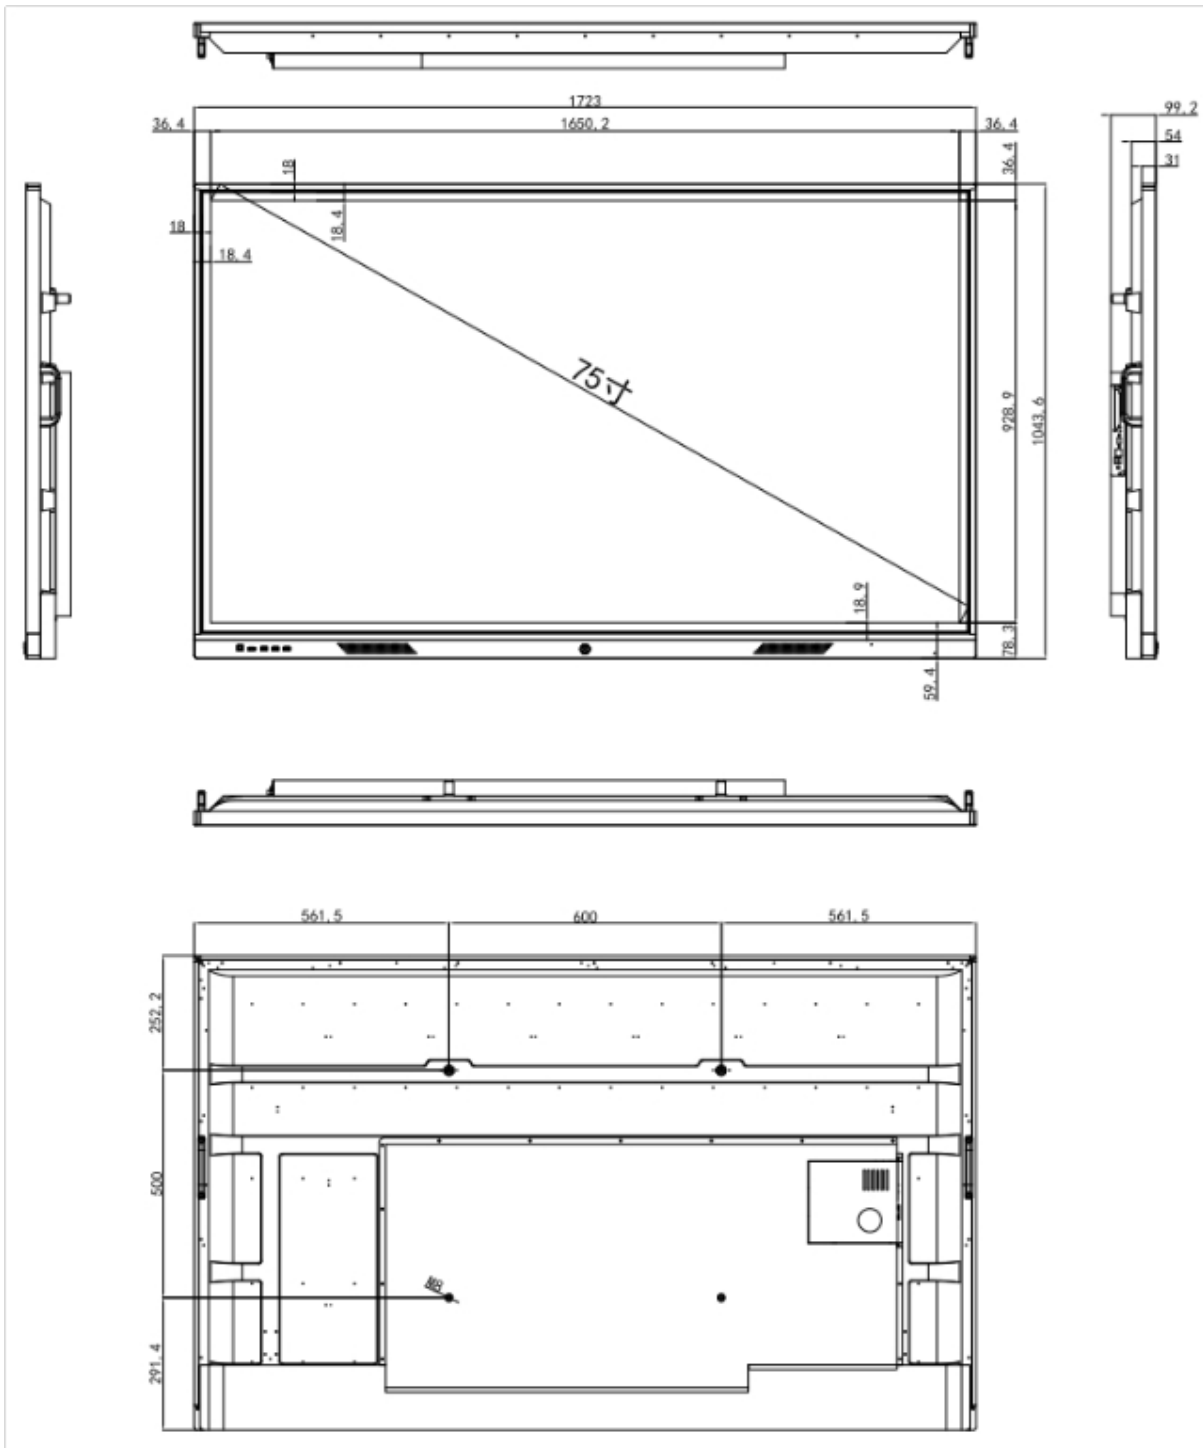

3.3 Installation size (86inches)

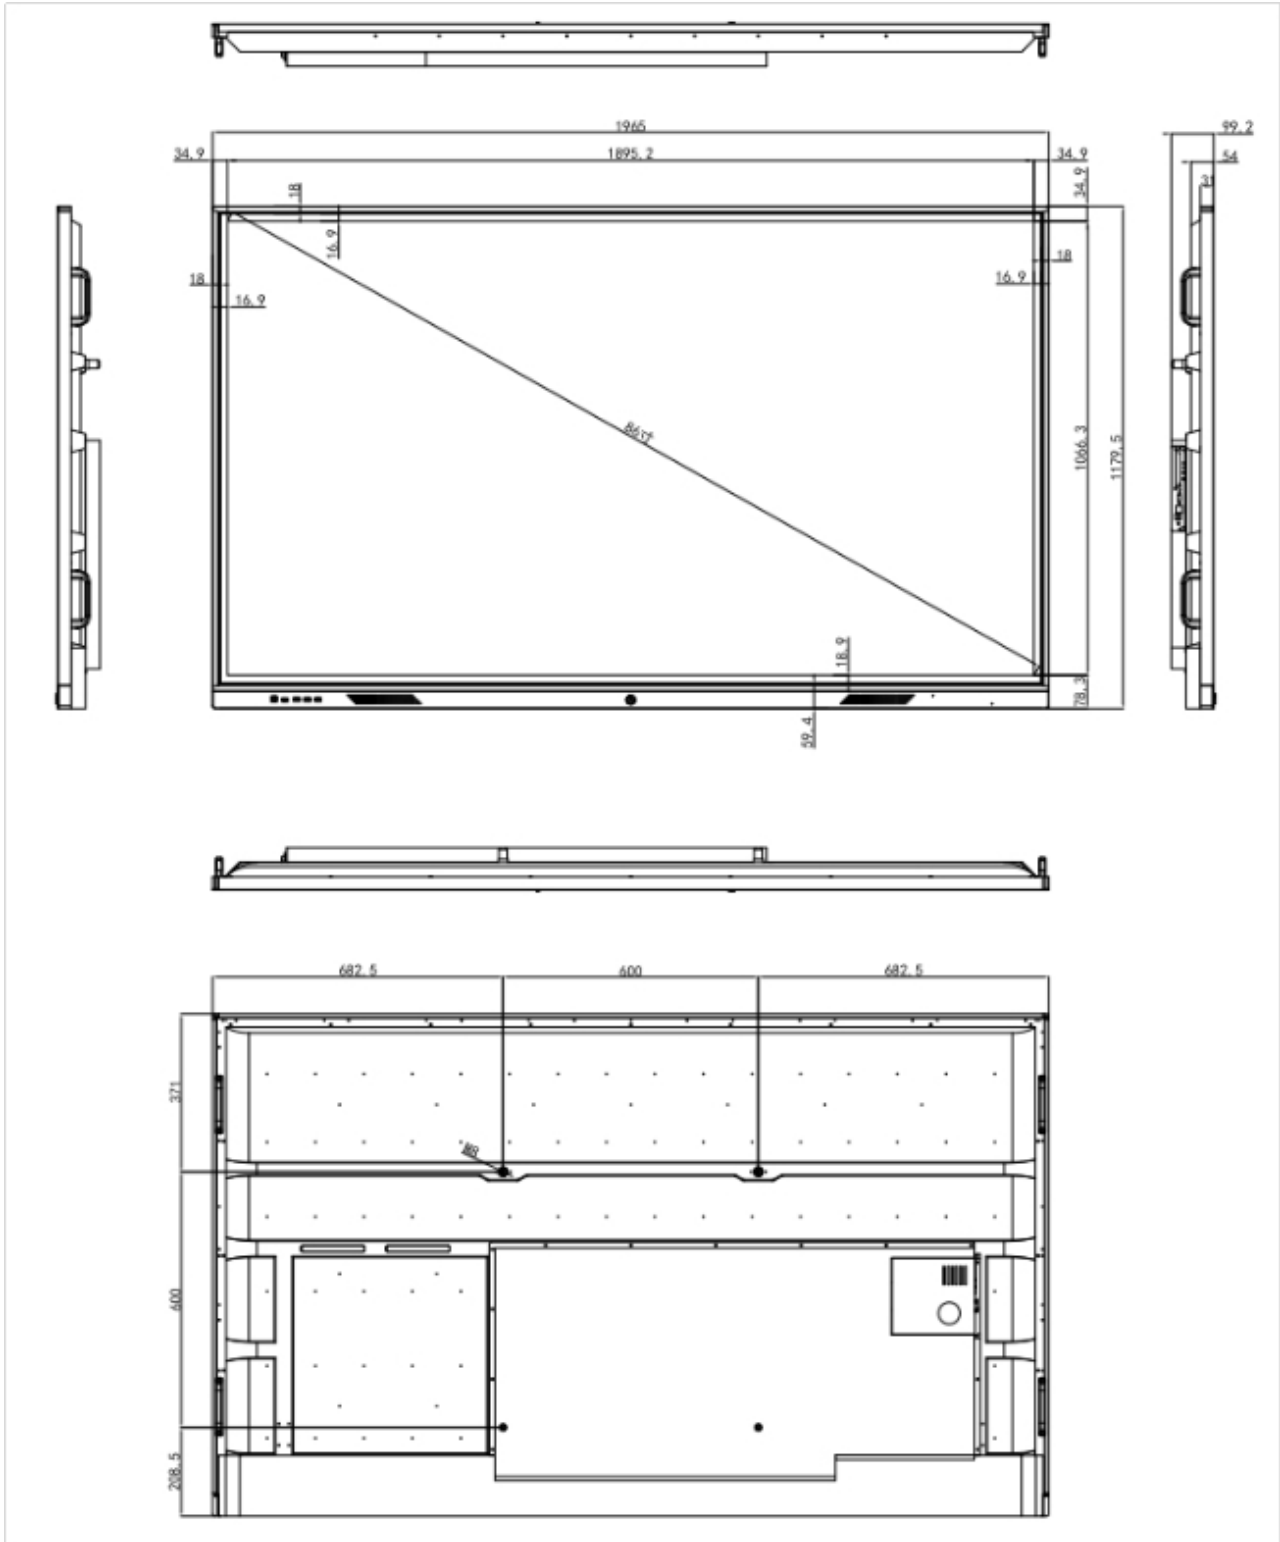

This drawing is for reference only. If there is a need for precise size control at the construction site, the actual measurement shall prevail!

4 Scenario shows

