

XX Pol Panel Antenna 698-960/1710-2690MHz 65°/65° 11/14dBi 3°/3° FET**Electrical Specifications**


Frequency Range (MHz):	698-960(R1)			1710-2690(Y1)		
	698-806	806-880	880-960	1710-1920	1920-2170	2490-2690
Gain (dBi):	10.0±0.5	9.7±0.5	10.5±0.5	12.5±0.5	13.5±0.5	15.0±0.5
Return Loss (dB):	>14(VSWR<1.5)					
Polarization:	±45°					
Horizontal 3dB Beamwidth (°):	72	75	72	72	68	58
Vertical 3dB Beamwidth (°):	42	38	33	21	18	15
Electrical Downtilt (°):	3 Fixed					
1 st Upper Sidelobe Suppression (dB):	14	12	8	18	17	16
Front to Back Ratio (dB):	23	23	23	23	23	23
Cross Polar Ratio 0° (dB):	15	15	15	15	15	15
Cross Polar Ratio ±60° (dB):	12	10	8	10	8	5
Isolation Port to Port (dB):	>25					
Max. Power Per Port (W):	150					
Intermodulation IM3 (dBc):	<-150(2×43 dBm)					
Impedance (ohm):	50					
Lightning Protection:	DC Grounded					
Connector Type:	4×4.3-10 Female					

BASTA Electrical Specifications

Frequency Range(MHz)	698-960(R1)			1710-2690(Y1)		
	698-806	806-880	880-960	1710-1920	1920-2170	2490-2690
Average Gain by all Beam Tilts (dBi):	9.9	9.7	10.4	12.7	13.9	15.3
Gain by all Beam Tilts Tolerance(dB):	±0.4	±0.4	±0.3	±0.7	±0.5	±0.3
Average Gain by Beam Tilt (dBi):	9.9	9.7	10.4	12.7	13.9	15.3
Horizontal Beamwidth Tolerance(°):	±4.3	±4.2	±3.8	±5	±7	±3.5
Vertical Beamwidth Tolerance(°):	±3.5	±2.4	±1.7	±0.7	±0.5	±0.6
USLS beampeak to 20° above beampeak (dB):	16	16	16	16	16	16
Front to back Total Power at 180° ± 30°(dB):	23	23.8	23.4	24.5	26	23.5
CPR at Boresight(dB):	15.4	18.8	21.2	23	20	23
CPR at Sector(dB):	11	8	8	9	8	2

Mechanical Data


Antenna Dimensions (mm):	495×300×150
Packing Dimensions (mm):	710×380×240
Antenna Net Weight / Bracket (kg):	6/2.5
Antenna Gross Weight (kg):	10
Radome Material:	PVC, UV Resistant
Pipe OD (mm):	30-50
Mounting Kits (Included):	BA.K.04.00047 Support Pole installation , Wall mounted installation

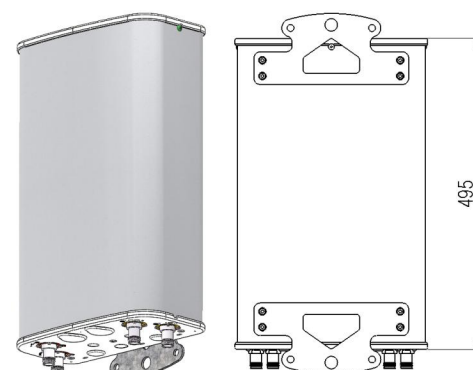


Environmental Ratings

Humidity:	95%RH@+30°C
Temperature (°C):	-40~+70
Wind Load @150 km/h (N):	Frontal/ Lateral/Rearside: 203/58/255
Max. Wind velocity (km/h):	200


Typical Patterns




Azimuth(Low band)



Elevation(Low band)




Azimuth(High band)



Elevation(High band)

Bottom View

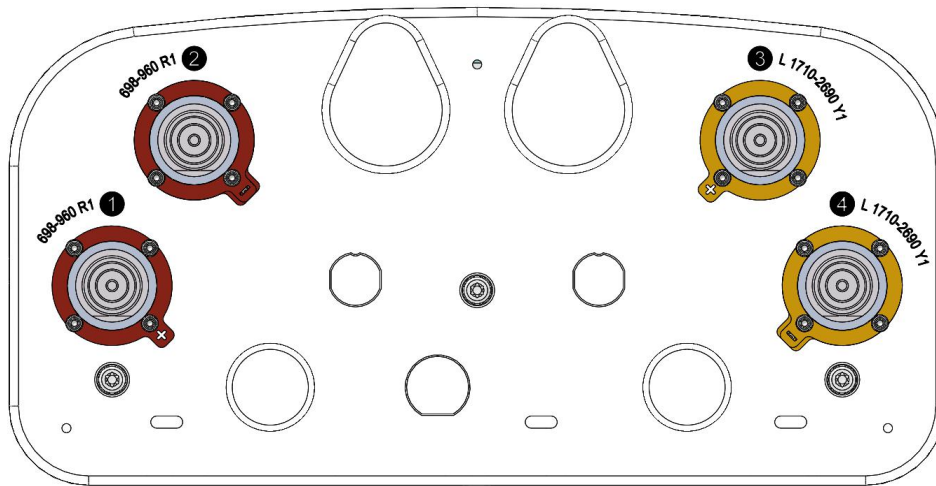

Correlation Table

Frequency range	Array	Connector
698-960 MHz	R1	1-2
1710-2690 MHz	Y1	3-4

