



POWER SUPPLY SYSTEM

Class II/T2, PV DC Surge Protective Devices

PV40...-V

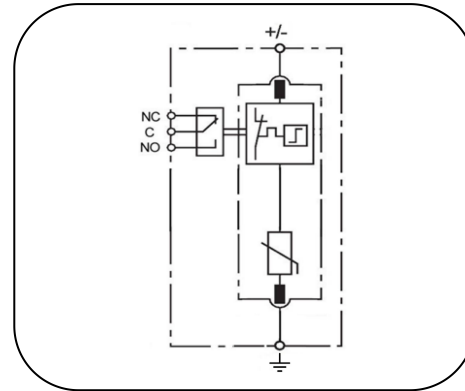

Basic circuit diagram

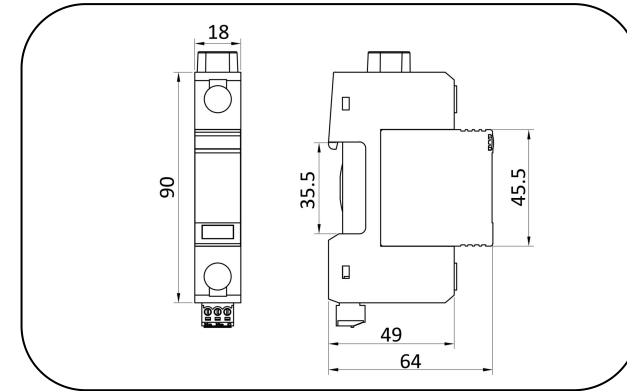

Dimension drawing

The PV40 V is class II (or T2) single pole PV DC SPD designed for DC application such as PV/ Photovoltaic system dc-side protection to against the damage from surge, at the boundaries from lightning protection zone 1-2 and higher..

With built in PROSURGE high energy MOV, PV40 V ensures remarkable surge current discharge capacity up to 40kA 8/20µs and high reliability. The unique design of thermal protection provides quick thermal response and secure disconnection.

- Class II/T2 PV DC SPD per IEC/EN 61643-31 standard.
- 18mm narrow model design, Single pole SPD for multi-purpose surge protection
- Application in Photovoltaic (PV) systems and other DC power system like charging system for electric vehicles etc.
- Unique thermal disconnecter design
- Surge current capability up to 40kA 8/20µs
- Low voltage protection level
- Degradation failure indication and optional remote signal contact.
- Pluggable module for easy replacement without the need to remove system wiring.
- Wide operating temperature -40° C ~85° C
- 35mm DIN-rail mounting
- Comply with EN 50539-11,UL1449 5th, IEEE C62.41,CSA C22.2 standards

POWER SUPPLY SYSTEM


Technical data

Part No.	PV40/48-V(-S)	PV40/75-V(-S)	PV40/100-V(-S)	PV40/150-V(-S)	PV40/200-V(-S)	PV40/300-V(-S)	PV40/400-V(-S)	PV40/500-V(-S)	PV40/600-V(-S)	PV40/750-V(-S)
In accordance with	IEC/EN 61643-31; UL1449 5 th ; EN 50539-11									
Category IEC/EU/VDE	II /2/ C									
Protection mode	DC+ to DC- or DC+/- to Ground									
Nominal Voltage (DC) U_n	48V	75V	100V	150V	200V	300V	400V	500V	600V	750V
Max. continuous operating voltage (DC) U_{cpv}	85V	100V	125V	170V	225V	350V	460V	560V	670V	800V
Nominal discharge current (8/20) I_n	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA
Max. discharge current (8/20) I_{max}	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA
Voltage protection level U_p	0.6kV	0.6kV	0.7kV	0.8kV	1.0kV	1.2kV	1.5kV	2.0kV	2.2kV	2.5kV
Response time t_A	≤25ns									
Leakage Current I_{pe}	<0.1mA									
Short-circuit Current I_{scpv}	1000A									
Operating temperature range	- 40°C ~ + 85°C									
Altitude	-500m ~ +4000m									
Cross-section of connection wire (max)	Single-strand 35mm ² ; multi-strand 25mm ²									
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3									
Enclosure material	thermoplastic; extinguishing degree UL94 V-0									
Degree of protection	IP20									
Installation width	1 modules, DIN 43880									
Thermal disconnecter	Internal Green – normal ; red - failure									
Remote alarm contact	Optional									
Approvals, Certifications	CE									
Additional data for Remote Alarm Contacts										
Remote alarm contact type	Isolated Form C									
Switching capability U_n/I_n	AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A									
Cross-section of remote signaling wire	Max. 1.5mm ² (or # 16AWG)									


POWER SUPPLY SYSTEM

Class II/T2, PV DC Surge Protective Devices

PV40...-V-C

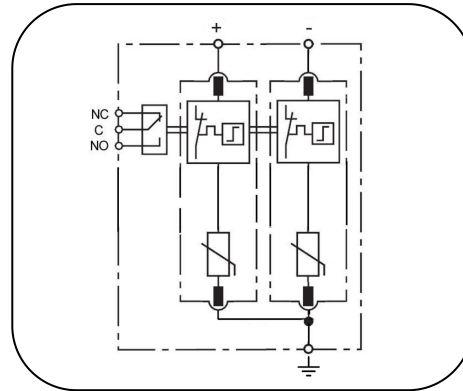

Basic circuit diagram

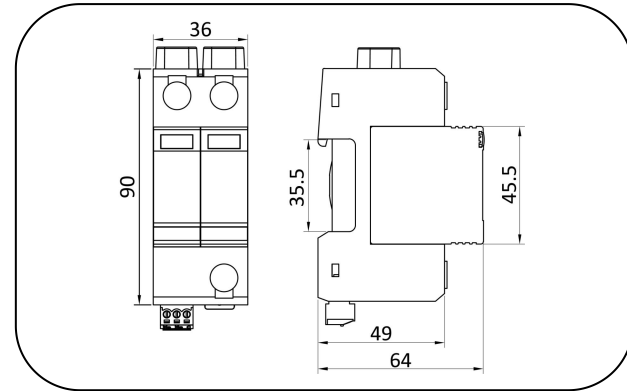

Dimension drawing

The PV40 C is class II (T2) prewired PV DC SPD designed for DC application such as PV/ Photovoltaic system dc-side protection to against the damage from surges, at the boundaries from lightning protection zone 1-2 and higher.

With built in PROSURGE high energy MOV, PV40 C ensures remarkable surge current discharge capacity up to 40kA 8/20µs and high reliability. The unique design of thermal protection provides quick thermal response and secure disconnection.

- Class II/T2 PV DC SPD per IEC/EN 61643-31 standard.
- 18mm narrow model design, prewired two poles of V circuit for common mode protection
- Application in Photovoltaic (PV) systems and other DC power system like charging system for electric vehicles etc.
- Unique thermal disconnecter design
- Surge current capability up to 40kA 8/20µs
- Low voltage protection level
- Degradation failure indication and optional remote signal contact.
- Pluggable module for easy replacement without the need to remove system wiring.
- Wide operating temperature -40° C ~85° C
- 35mm DIN-rail mounting
- Comply with EN 50539-11,UL1449 5th, IEEE C62.41,CSA C22.2 standards


POWER SUPPLY SYSTEM

Technical data


Part No.	PV40/48-V-C(-S)	PV40/75-V-C(-S)	PV40/100-V-C(-S)	PV40/150-V-C(-S)	PV40/200-V-C(-S)	PV40/300-V-C(-S)	PV40/400-V-C(-S)	PV40/500-V-C(-S)	PV40/600-V-C(-S)	
In accordance with	IEC/EN 61643-31; UL1449 5 th ; EN 50539-11									
Category IEC/EU/VDE	II / 2/ C									
Protection mode	DC+ to DC- , DC+/- to Ground									
Nominal Voltage (DC) U_n	48V	75V	100V	150V	200V	300V	400V	500V	600V	
Max. continuous operating voltage (DC) U_{cpv}	85V	100V	125V	170V	225V	350V	460V	560V	670V	
Nominal discharge current (8/20) I_n	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA	
Max. discharge current (8/20) I_{max}	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA	
Voltage protection level U_p	DC+/- to PE	0.6kV	0.6kV	0.7kV	0.8kV	1.0kV	1.2kV	1.5kV	2.0kV	2.2kV
	DC + to DC -	1.0kV	1.0kV	1.2kV	1.5kV	2.0kV	2.2kV	2.8kV	3.5kV	4.0kV
Response time t_A	≤25ns									
Leakage Current I_{pe}	<0.1mA									
Short-circuit Current I_{scpv}	1000A									
Operating temperature range	- 40°C ~ + 85°C									
Altitude	-500m ~ +4000m									
Cross-section of connection wire (max)	Single-strand 35mm ² ; multi-strand 25mm ²									
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3									
Enclosure material	thermoplastic; extinguishing degree UL94 V-0									
Degree of protection	IP20									
Installation width	2 modules, DIN 43880									
Thermal disconnecter	Internal Green – normal ; red - failure									
Remote alarm contact	Optional									
Approvals, Certifications	CE									
Additional data for Remote Alarm Contacts										
Remote alarm contact type	Isolated Form C									
Switching capability U_n/I_n	AC: 250V/0.5A				DC: 250V/0.1A; 125V/0.2A; 75V/0.5A					
Cross-section of remote signaling wire	Max. 1.5mm ² (or # 16AWG)									

Class II/T2, PV DC Surge Protective Devices

PV40...-V-CD

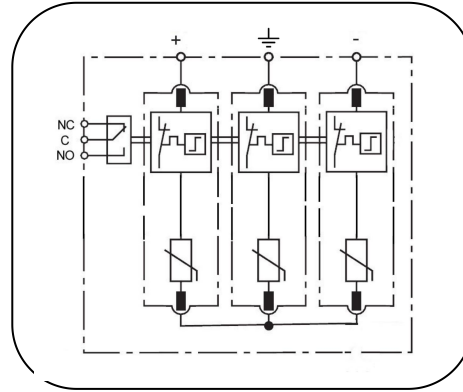

Basic circuit diagram

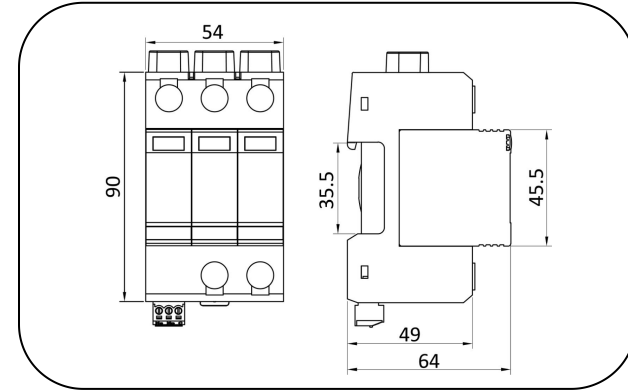

Dimension drawing

The PV40 CD is class II (or T2) prewired PV DC SPD designed for DC application such as PV/ Photovoltaic system dc-side protection to against the damage from surges, at the boundaries from lightning protection zone 1-2 and higher.

With built in PROSURGE high energy MOV, PV40 CD ensures remarkable surge current discharge capacity up to 40kA 8/20µs and high reliability. The unique design of thermal protection provides quick thermal response and secure disconnection.

- Class II/T2 PV DC SPD per IEC/EN 61643-31 standard.
- 18mm narrow model design, prewired three poles of Y circuit for common mode & differential mode protection
- Application in Photovoltaic (PV) systems and other DC power system like charging system for electric vehicles etc.
- Unique thermal disconnecter design
- Surge current capability up to 40kA 8/20µs
- Low voltage protection level
- Degradation failure indication and optional remote signal contact.
- Pluggable module for easy replacement without the need to remove system wiring.
- Wide operating temperature -40° C ~85° C
- 35mm DIN-rail mounting
- Comply with EN 50539-11, UL1449 5th, IEEE C62.41, CSA C22.2 standards

POWER SUPPLY SYSTEM

Technical data

Part No.	PV40/100-V-C D(-S)	PV40/200-V-C D(-S)	PV40/300-V-C D(-S)	PV40/400-V-C D(-S)	PV40/600-V-C (-S)	PV40/800-V-C D(-S)	PV40/1000-V-CD(-S)	PV40/1200-V-CD(-S)	PV40/1500-V-CD(-S)
In accordance with	IEC/EN 61643-31; UL1449 5 th ; EN 50539-11								
Category IEC/EU/VDE	I+ II /1+2/ B+C								
Protection mode	DC+ to DC- , DC+/- to Ground								
Nominal Voltage (DC) U_n	100V	200V	300V	400V	600V	800V	1000V	1200V	1500V
Max. continuous operating voltage (DC) U_{cpv}	170V	250V	340V	450V	700V	920V	1120V	1340V	1500V
Nominal discharge current (8/20) I_n	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA	20kA
Max. discharge current (8/20) I_{max}	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA	40kA
Voltage protection level U_p (DC+/- to PE, DC+ to DC-)	1.0kV	1.2kV	1.5kV	2.0kV	2.2kV	2.8kV	3.5kV	4.0kV	4.5kV
Response time t_A	$\leq 25ns$								
Leakage Current I_{pe}	$< 0.1mA$								
Short-circuit Current I_{scpv}	1000A								
Operating temperature range	$- 40^{\circ}C \sim + 85^{\circ}C$								
Altitude	$-500m \sim +4000m$								
Cross-section of connection wire (max)	Single-strand 35mm ² ; multi-strand 25mm ²								
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3								
Enclosure material	thermoplastic; extinguishing degree UL94 V-0								
Degree of protection	IP20								
Installation width	3 modules, DIN 43880								
Thermal disconnecter	Internal Green – normal ; red - failure								
Remote alarm contact	Optional								
Approvals, Certifications	CE								
Additional data for Remote Alarm Contacts									
Remote alarm contact type	Isolated Form C								
Switching capability U_n/I_n	AC: 250V/0.5A				DC: 250V/0.1A; 125V/0.2A; 75V/0.5A				
Cross-section of remote signaling wire	Max. 1.5mm ² (or # 16AWG)								