



南京时恒电子科技有限公司

Nanjing Shiheng Electronics Co.,Ltd.

规格承认书

APPROVAL SHEET

客户名称 CUSTOMER :

产品名称 PART NAME :

产品规格 PART NUMBER :

产品编号 PRODUCTCODE:

版次 REV.NO:

日期 DATE:

MF52 测温型 NTC 热敏电阻器

MF52 Series Temp Measurement NTC Thermistor

MF52B 103F395020L0023

B0

确认

CONFIRM

客户 CLIENT		供货商/制造商 MANUFACTOR	
品保部 Quality Dep.		规格书制作 Design	吴仪
制造部 Production Dep.		业务部审核 Checked by sales	
工程部 Engineering Dep.		技术部审核 Checked by R&D	程鹏
		品质部审核 Checked by QA	李少媛

南京时恒电子科技有限公司

NANJING SHIHENG ELECTRONICS CO., LTD.

地址: 南京市江宁区湖熟镇金阳路 18 号邮编 Postcode: 211121

Address: No.18 Jinyang Road Hushu Town Jiangning District Nanjing China

TEL: 025-52121868

Http: //www.shiheng.com.cn

E-MAIL:sales@shiheng.com.cn



变 更 记 录 表

REVISÉD RECORD SHEET

[illegible]

1、产品型号说明 Product model specification

MF52 B 103 F 3950 20 L 0100

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① MF52: 测温型 NTC 热敏电阻器系列 (Series Temp Measurement NTC Thermistor)
- ② B: 指引线为漆包线 (Lead wire is enamelled wire)
- ③ 103: 25℃ 的零功率电阻值 10KΩ (Zero Power Resistance at 25℃ is 10KΩ)
- ④ F: 阻值精度代码 F±1% G±2% H±3% J±5% (Resistance precision code F±1% G±2% H±3% J±5%)
- ⑤ 3950: B25/50 值 3950K (B25/50:3950K)
- ⑥ 20: 线材规格: 引线外径 Φ0.2mm (Wire dimension: The outer diameter of lead wire is Φ0.2mm)
- ⑦ L: 测量线材长度方式: L 指线长 Z 指总长 (Method of measuring Wire length: L=Line length Z=Total length)
- ⑧ 0100: 线材长度 0100=100mm。 (Wire length 0100=100mm)

2、电气性能 Electrical Characteristics

No.	项目 Item	符号 Symbol	测试条件 Test conditions	单位 Unit	性能要求 Requirements
2.1	25℃ 的零功率电阻值 Zero Power Resistance at 25℃	$R_{25^{\circ}\text{C}}$	$T_a=25\pm0.01^{\circ}\text{C}$ Test Power $\leq 0.1\text{mW}$	KΩ	$10\text{K}\Omega\pm 1\%$
2.2	B 值 B-value	$B_{25/50}$	$B=[(T_a\times T_b)/(T_b-T_a)]\times\ln(R_a/R_b)$ $T_a=25\pm0.01^{\circ}\text{C}$ $T_b=50^{\circ}\text{C}\pm0.01^{\circ}\text{C}$	K	$3950\pm 1\%$
2.3	耗散系数 Thermal dissipation Coefficient	δ	静止空气中 In still air	mW/℃	≥ 2
2.4	时间常数 Thermal time constant	τ	静止空气中 In still air	sec	≤ 7
2.6	绝缘电阻 Insulation resistance	/	100V/DC 1min	MΩ	≥ 100
2.7	工作温度范围 Operating temperature range	/	/	℃	$-55^{\circ}\text{C}\sim 125^{\circ}\text{C}$
2.8	最大额定功率 Maximum rated power	P_{max}	/	mW	50
2.9	阻温特性 R&T-table	/	/	/	见附表 I See attached table I
2.10	阻值误差&B 值误差 Resistance tolerance& B-value tolerance	/	/	/	见附表 II See attached table II

3、产品图纸 Product drawing



产品图纸

Product drawing

 客户
确认
Customer
confirm

客户名称 Customer:

 确认
Confirm

 日期
DATE


 审核
Approve:

 日期
DATE

 产品型号
MODEL NO. MF52B 103F395020L0100

尺寸 Dimensions:

(Unit: mm)

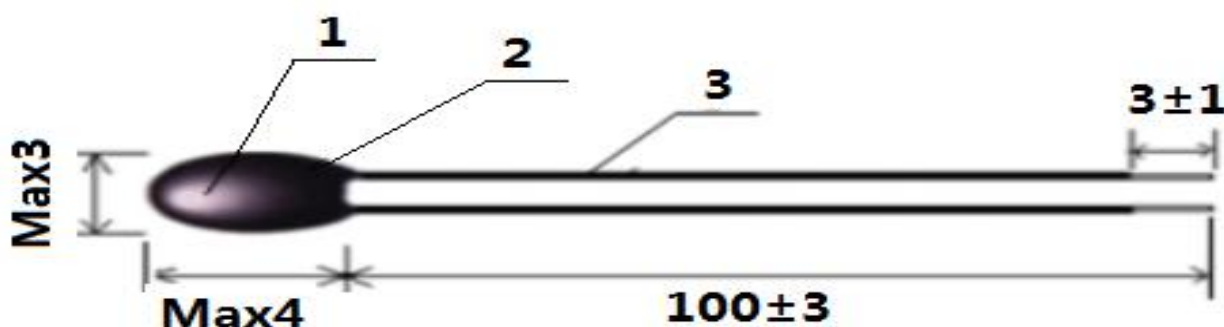

技术要求 Technical requirements:

- 1) 零功率阻值: R25: $10K\Omega \pm 1\%$ (Zero Power Resistance: R25: $10K\Omega \pm 1\%$);
- 2) B25/50 数值: $3950K \pm 1\%$ (B-value: B25/50: $3950K \pm 1\%$);
- 3) 线材: 外径 $\Phi 0.2$ 红色漆包线 (OD $\Phi 0.2$ red enamelled wire);
- 4) 封装: 黑色环氧树脂包封 (Black Epoxy);
- 5) 符合 RoHS 环保要求 (Meet environmental protection requirements: RoHS)。

材料规格 Material specifications

No.	名称 Name	材料规格 Material specifications	数量 Quantity	备注 note
1	核心元件 Core element	热敏电阻芯片 $10K\Omega$	1	
2	包封类 Coating material	环氧树脂	/	黑色 Black
3	导线 Conducting wire	外径 $\Phi 0.2$ 红色漆包线 (铜线) Outer diameter $\Phi 0.2$ red enameled wire (copper wire)	2	
4				
5				
6				

更新履历 Revised record sheet

版本 REV. NO	更新时间 REV. DATE	更新内容 Change content	申请人 Applicant	批准人 Approved
B0		版本发行		

4、可靠性 Reliability

No.	项目 Item	试验标准	试验条件及方法 Test conditions and methods	性能要求 Requirements
4.1	引出端强度 Terminal strength	IEC60068-2-21	固定电阻端, 拉力: 5 ± 1 N, 时间: 10 ± 1 秒 Fixed resistor end, Pull strength: 5 ± 1 N, time: 10 ± 1 sec	无可见性损伤 No obvious damage $R_{25} \Delta R/R \leq \pm 2\%$
4.2	可焊性 Solderability	IEC60068-2-20	温度 $245 \pm 5^\circ\text{C}$ 时间 2-3 秒 temperature : $245 \pm 5^\circ\text{C}$ for 2-3sec	着锡面积 $\geq 95\%$ Coverage area $\geq 95\%$.
4.3	稳态湿热 Steady humidity and heat	IEC60068-2-78	温度: $40^\circ\text{C} \pm 2^\circ\text{C}$, 湿度: $93 \pm 2\%$, 时间: 500 小时 Temp: $40^\circ\text{C} \pm 2^\circ\text{C}$, humidity: $93 \pm 2\%$, Time : 500hrs	无可见性损伤 No obvious damage $R_{25} \Delta R/R \leq \pm 2\%$
4.4	温度快速变化 Rapid changes in temperature	IEC60068-2-14	-55°C 30min $\rightarrow$ 25°C 5min $\rightarrow$ 125°C 30min $\rightarrow$ 25°C 5min, 5cycles	无可见性损伤 No obvious damage $R_{25} \Delta R/R \leq \pm 2\%$
4.5	高温储存 High temperature storage	IEC60068-2-2	温度: $125^\circ\text{C} \pm 5^\circ\text{C}$ 时间: 1000 小时 Temp : $125^\circ\text{C} \pm 5^\circ\text{C}$, Time : 1000hrs	无可见性损伤 No obvious damage $R_{25} \Delta R/R \leq \pm 2\%$
4.6	低温储存 Low temperature storage	IEC60068-2-1	温度: -55°C 时间: 1000 小时 Temp : -55°C , Time : 1000hrs	无可见性损伤 No obvious damage $R_{25} \Delta R/R \leq \pm 2\%$

▲注: 1) 稳态湿热及温度快速变化试验结束后, 样品需在常温环境下静置 2 小时后再做性能测试;

▲Note: 1) After the test of steady-state humid heat and rapid temperature change, the sample should be kept for 2 hours at room temperature before performance test ;

2) 高温存储及低温存储结束后, 需随测试环境自然恢复至常温, 再取出做性能测试。

2) After the test of high - and low-temperature storage is complete, and then take it out for performance test when the test environment naturally regain to normal temperature.

5、产品包装 Product packaging

5.1 包装方式 Packing Type

■ 散装方式 Bulk Type □ 盒装方式 Boxed Type □ 盘装方式 Reel Type

5.2 包装规格 Packing specification

No.	包装规格 Packing specification	包装材料、尺寸 Packing material, size	产品数量 Quantity
1	包装袋 Packing bag	热封口袋(Heat sealing bag) $W \times H = XXX\text{mm} \times XXX\text{mm}$	
2	内包装盒 Inner box	纸箱(Carton), $L \times W \times H = XXX\text{mm} \times XXX\text{mm} \times XXX\text{mm}$	
3	外包装箱 Outer carton	纸箱(Carton), $L \times W \times H = XXX\text{mm} \times XXX\text{mm} \times XXX\text{mm}$	

6、存储&运输要求 STORAGE & Transportation Requirements

6.1 存储环境要求 Storage environment requirements

6.1.1 储存温度: $-10^{\circ}\text{C} \sim 40^{\circ}\text{C}$; 储存湿度: $\leq 75\% \text{ RH}$

(Storage temperature: $-10^{\circ}\text{C} \sim 40^{\circ}\text{C}$; storage humidity: $\leq 75\% \text{ RH}$);

6.1.2 避免存放在具有腐蚀性物质及气体的环境中、光照及辐射源的环境下

(Avoid storage in the environment of corrosive substances and gas, light and radiation source);

6.1.3 包装打开后需重新密封保存, 贮存期 1 年, 超过贮存期, 可按本标准规定的项目重新检验, 如符合要求仍可使用

(After the package is opened, it should be re-sealed and stored for one year. If the storage period exceeds, it can be retested according to the items specified in this sheet. If it meets the requirements, it can still be used).

6.2 运输要求 Transportation requirements

6.2.1 存储或运输过程中, 产品叠放高度不超过 4 箱产品

(During storage or transportation, the height of stacked products should not exceed the height of 4 boxes);

6.2.2 避免产品在运输过程中强烈碰撞和跌落

(Avoid strong collision and fall during transportation);

6.2.3 产品运输方式不限, 但需要避免雨水、雪、冰雹、海水的直接或间接淋袭

(The transportation method is not limited, but the direct or indirect attack of rain, snow, hail and sea water should be avoided).

7、安装&使用注意事项 Installation & Use precautions

7.1 本产品的用途: 温度测量与控制

(Usage of this product: Temperature measurement and control);

7.2 本产品适用于常规家用、工业产品上, 如果用于特殊设备/装置如: 航空航天、深海探测、医疗、军用、新能源电源、铁道交通、消防、交通信号等设备上, 请联系我司人员对相应的要求进行确认

(This product is used for conventional household and industrial products. If used in special equipment/device such as: aerospace, deep sea exploration, medical, military, new energy power supply, railway traffic, fire control, traffic signals and other equipment, please contact our staff to confirm the corresponding requirements).

7.3 产品使用的最大工作温度, 最大功率等, 依照规格书要求作业, 不可超出规格书范围

(The maximum working temperature, maximum power, etc. of the product shall be operated in accordance with the requirements of the specification, and shall not exceed the scope of the specification).

7.4 设计使用时, 避免过大的电流引起元件自身发热而产生测量误差

(When designing and using, avoid measuring error caused by excessive current);

7.5 产品外观发现变形、破损时, 不建议使用, 可能会影响产品电气性能

(If the product is deformed or damaged, do not use it. Otherwise, the electrical performance may be affected);

7.6 烙铁焊接时, 焊接处距包封头部距离至少 2mm, 焊接温度应低于 360°C , 焊接时间 $< 3\text{sec}$

(When soldering by soldering iron, the distance between the welding place and the coating head should be at least 2mm, the welding temperature should be lower than 360°C , and the welding time should be less than 3sec);

7.7 如在加工过程中需使用热缩管, 热缩管热缩时不可使用电吹风进行吹制, 建议热缩工艺, 将套好热缩管后的产品放入恒温烘箱中, 按 $110^{\circ}\text{C}/10 \sim 12\text{min}$ 进行热缩

(If the heat shrinkable tube is used in the manufacturing process, do not use a hair dryer to shrink the tube. This is a recommended heat shrinkable process that puts the product covered shrinkable tube into a constant temperature oven, and shrink them at $110^{\circ}\text{C}/10 \sim 12\text{min}$);

7.8 一般不建议做注塑加工, 因为注塑工艺的高温 and 高压会直接影响产品性能, 本产品如果采用注塑工艺加工, 需与我司确认具体的注塑工艺参数

(Generally, injection molding is not recommended, because the high temperature and high pressure of injection molding process will directly affect the product performance. If the product is processed by injection molding process, it is necessary to confirm the specific injection molding process parameters with our company);

7.9 产品核心芯片为陶瓷半导体，在使用过程中避免挤压或对环氧端头物理撞击，以免造成产品损伤

(The core chip of the product is a ceramic semiconductor. Avoid extrusion or physical impact on the epoxy end in the process of use, so as not to cause product damage);

7.10 产品引线需剪短加工时，裁剪处距环氧端头距离应不小于 10mm，且裁切时夹紧端头处

(When the product leads need to be cut short, the cutting distance from the epoxy end should be no less than 10mm, and the end should be clamped when cutting)。

7.11 如产品需要引线折弯时，折弯半径应不小于 1mm，折弯角度为 90°，折弯次数依引线直径大小存在差异，需与我司确认

(If the product needs lead bending, bending radius should not be less than 1mm, bending angle is 90°. Bending times vary according to the lead diameter and need to be confirmed with our company);

7.12 本产品采用环氧树脂封装，具有一般的防水性，若使用环境湿度>80%RH 或长期浸泡水中会导致封装端头渗水，造成绝缘和阻值性能偏低，如有相关的要求需与我司联系，产品增加防水层保护

(This product is encapsulated with epoxy resin, which is generally waterproof. If the ambient humidity is more than 80%RH or the product has long-term immersion in water, water seepage will occur at the end of the epoxy head, resulting in low insulation and resistance performance. If you have relevant requirements, please contact our company and add waterproof layer to the product)。

8、产品认证 Product certification

No.	项目 Projects	产品认证 Product certification
8.1	质量管理体系认证 Quality Management System Certification	ISO9001:2015
		IATF16949: 2016
8.2	环境管理体系认证 Environmental Management System Certification	ISO14001:2015
8.3	环保检测报告 Environmental test report	RoHS 2.0
8.4	产品 CQC 认证 CQC certificate	
8.5	苏省高新技术产品认证 High-tech product certificate in Jiangsu Province	

附表 I (Attachment I)

南京时恒电子科技有限公司

SHIHENG R-T Table

R25=10K Ω 精度: $\pm 1\%$ B25/50=3950K 精度: $\pm 1\%$ (P477-4B)							
温度($^{\circ}\text{C}$) TEMP($^{\circ}\text{C}$)	电阻(K Ω) RESISTANCE (K Ω)			电阻精度(%) RESIST-TOL (%)		温度精度($^{\circ}\text{C}$) TEMP-TOL ($^{\circ}\text{C}$)	
	最小值 MIN	中心值 CENTER	最大值 MAX	ΔR	$-\Delta R$	ΔT	$-\Delta T$
-55	709.352	749.200	789.047	5.318	-5.318	0.721	-0.721
-54	662.784	699.508	736.232	5.249	-5.249	0.717	-0.717
-53	619.595	653.455	687.316	5.181	-5.181	0.714	-0.714
-52	579.499	610.733	641.966	5.114	-5.114	0.710	-0.710
-51	542.246	571.067	599.888	5.046	-5.046	0.706	-0.706
-50	507.611	534.215	560.819	4.980	-4.980	0.702	-0.702
-49	475.391	499.957	524.524	4.913	-4.913	0.698	-0.698
-48	445.403	468.095	490.787	4.847	-4.847	0.694	-0.694
-47	417.480	438.448	459.415	4.782	-4.782	0.690	-0.690
-46	391.470	410.851	430.232	4.717	-4.717	0.686	-0.686
-45	367.234	385.154	403.073	4.652	-4.652	0.682	-0.682
-44	344.643	361.217	377.791	4.588	-4.588	0.678	-0.678
-43	323.579	338.913	354.247	4.524	-4.524	0.674	-0.674
-42	303.931	318.123	332.315	4.461	-4.461	0.669	-0.669
-41	285.600	298.739	311.878	4.398	-4.398	0.665	-0.665
-40	268.491	280.660	292.828	4.335	-4.335	0.660	-0.660
-39	252.517	263.791	275.064	4.273	-4.273	0.656	-0.656
-38	237.598	248.046	258.494	4.212	-4.212	0.651	-0.651
-37	223.660	233.346	243.032	4.150	-4.150	0.647	-0.647
-36	210.632	219.615	228.598	4.090	-4.090	0.642	-0.642
-35	198.452	206.785	215.119	4.030	-4.030	0.637	-0.637
-34	187.058	194.792	202.525	3.970	-3.970	0.632	-0.632
-33	176.396	183.576	190.755	3.910	-3.910	0.627	-0.627
-32	166.415	173.082	179.749	3.851	-3.851	0.622	-0.622
-31	157.067	163.260	169.453	3.793	-3.793	0.617	-0.617
-30	148.307	154.062	159.817	3.735	-3.735	0.612	-0.612
-29	140.096	145.446	150.795	3.677	-3.677	0.607	-0.607
-28	132.395	137.369	142.343	3.620	-3.620	0.602	-0.602
-27	125.169	129.795	134.421	3.563	-3.563	0.596	-0.596
-26	118.386	122.689	126.993	3.507	-3.507	0.591	-0.591
-25	112.015	116.020	120.024	3.451	-3.451	0.586	-0.586
-24	106.028	109.756	113.483	3.396	-3.396	0.580	-0.580
-23	100.400	103.870	107.341	3.341	-3.341	0.574	-0.574
-22	95.106	98.338	101.570	3.286	-3.286	0.569	-0.569
-21	90.125	93.135	96.145	3.231	-3.231	0.563	-0.563



-20	85.434	88.238	91.043	3.177	-3.177	0.557	-0.557
-19	81.017	83.629	86.242	3.124	-3.124	0.551	-0.551
-18	76.853	79.288	81.723	3.070	-3.070	0.545	-0.545
-17	72.928	75.197	77.467	3.017	-3.017	0.539	-0.539
-16	69.226	71.341	73.456	2.965	-2.965	0.533	-0.533
-15	65.732	67.704	69.676	2.912	-2.912	0.527	-0.527
-14	62.433	64.272	66.111	2.860	-2.860	0.521	-0.521
-13	59.318	61.032	62.747	2.809	-2.809	0.514	-0.514
-12	56.374	57.972	59.571	2.757	-2.757	0.508	-0.508
-11	53.591	55.082	56.572	2.706	-2.706	0.502	-0.502
-10	50.959	52.350	53.740	2.655	-2.655	0.495	-0.495
-9	48.470	49.766	51.062	2.604	-2.604	0.488	-0.488
-8	46.113	47.322	48.531	2.554	-2.554	0.482	-0.482
-7	43.883	45.010	46.137	2.504	-2.504	0.475	-0.475
-6	41.770	42.821	43.872	2.454	-2.454	0.468	-0.468
-5	39.768	40.748	41.728	2.404	-2.404	0.461	-0.461
-4	37.871	38.785	39.699	2.355	-2.355	0.454	-0.454
-3	36.073	36.925	37.776	2.306	-2.306	0.447	-0.447
-2	34.368	35.161	35.955	2.257	-2.257	0.440	-0.440
-1	32.750	33.489	34.229	2.208	-2.208	0.433	-0.433
0	31.356	32.049	32.743	2.164	-2.164	0.425	-0.425
1	29.757	30.399	31.041	2.111	-2.111	0.419	-0.419
2	28.374	28.972	29.570	2.063	-2.063	0.411	-0.411
3	27.060	27.617	28.174	2.015	-2.015	0.404	-0.404
4	25.812	26.330	26.849	1.968	-1.968	0.396	-0.396
5	24.627	25.109	25.591	1.920	-1.920	0.389	-0.389
6	23.500	23.948	24.397	1.873	-1.873	0.381	-0.381
7	22.429	22.846	23.263	1.826	-1.826	0.373	-0.373
8	21.410	21.798	22.186	1.779	-1.779	0.366	-0.366
9	20.442	20.802	21.163	1.732	-1.732	0.358	-0.358
10	19.521	19.856	20.190	1.685	-1.685	0.350	-0.350
11	18.644	18.955	19.266	1.639	-1.639	0.342	-0.342
12	17.811	18.099	18.388	1.593	-1.593	0.333	-0.333
13	17.017	17.285	17.552	1.547	-1.547	0.325	-0.325
14	16.262	16.510	16.758	1.501	-1.501	0.317	-0.317
15	15.543	15.773	16.002	1.455	-1.455	0.308	-0.308
16	14.858	15.071	15.284	1.410	-1.410	0.300	-0.300
17	14.207	14.403	14.600	1.364	-1.364	0.291	-0.291
18	13.586	13.767	13.949	1.319	-1.319	0.282	-0.282
19	12.994	13.162	13.330	1.274	-1.274	0.272	-0.272
20	12.431	12.585	12.740	1.229	-1.229	0.262	-0.262
21	11.894	12.036	12.179	1.185	-1.185	0.252	-0.252
22	11.382	11.513	11.645	1.140	-1.140	0.240	-0.240
23	10.894	11.015	11.136	1.096	-1.096	0.225	-0.225




24	10.429	10.540	10.651	1.052	-1.052	0.199	-0.199
25	9.900	10.000	10.100	1.000	-1.000	0.190	-0.190
26	9.556	9.656	9.756	1.034	-1.034	0.297	-0.297
27	9.145	9.245	9.345	1.078	-1.078	0.276	-0.276
28	8.754	8.853	8.953	1.121	-1.121	0.279	-0.279
29	8.381	8.479	8.578	1.164	-1.164	0.286	-0.286
30	8.025	8.123	8.221	1.207	-1.207	0.295	-0.295
31	7.686	7.783	7.880	1.250	-1.250	0.305	-0.305
32	7.362	7.459	7.555	1.293	-1.293	0.316	-0.316
33	7.054	7.149	7.245	1.335	-1.335	0.327	-0.327
34	6.760	6.854	6.949	1.377	-1.377	0.338	-0.338
35	6.479	6.573	6.666	1.419	-1.419	0.349	-0.349
36	6.212	6.304	6.396	1.461	-1.461	0.361	-0.361
37	5.956	6.047	6.138	1.502	-1.502	0.373	-0.373
38	5.712	5.802	5.892	1.544	-1.544	0.384	-0.384
39	5.480	5.568	5.656	1.585	-1.585	0.396	-0.396
40	5.258	5.345	5.432	1.626	-1.626	0.409	-0.409
41	5.046	5.131	5.217	1.667	-1.667	0.421	-0.421
42	4.843	4.927	5.011	1.707	-1.707	0.433	-0.433
43	4.650	4.733	4.815	1.748	-1.748	0.446	-0.446
44	4.465	4.546	4.628	1.788	-1.788	0.458	-0.458
45	4.289	4.368	4.448	1.828	-1.828	0.471	-0.471
46	4.120	4.198	4.277	1.867	-1.867	0.483	-0.483
47	3.959	4.036	4.113	1.907	-1.907	0.496	-0.496
48	3.805	3.880	3.956	1.946	-1.946	0.509	-0.509
49	3.658	3.732	3.806	1.985	-1.985	0.522	-0.522
50	3.517	3.590	3.662	2.024	-2.024	0.535	-0.535
51	3.382	3.453	3.525	2.063	-2.063	0.548	-0.548
52	3.253	3.323	3.393	2.101	-2.101	0.561	-0.561
53	3.130	3.199	3.267	2.139	-2.139	0.575	-0.575
54	3.012	3.079	3.147	2.177	-2.177	0.588	-0.588
55	2.900	2.965	3.031	2.215	-2.215	0.601	-0.601
56	2.792	2.856	2.920	2.253	-2.253	0.615	-0.615
57	2.688	2.751	2.814	2.290	-2.290	0.628	-0.628
58	2.589	2.651	2.713	2.327	-2.327	0.642	-0.642
59	2.494	2.555	2.615	2.364	-2.364	0.656	-0.656
60	2.404	2.463	2.522	2.401	-2.401	0.670	-0.670
61	2.317	2.375	2.432	2.437	-2.437	0.684	-0.684
62	2.233	2.290	2.347	2.473	-2.473	0.698	-0.698
63	2.153	2.209	2.264	2.510	-2.510	0.712	-0.712
64	2.077	2.131	2.185	2.545	-2.545	0.726	-0.726
65	2.003	2.056	2.110	2.581	-2.581	0.740	-0.740
66	1.933	1.985	2.037	2.616	-2.616	0.754	-0.754
67	1.865	1.916	1.967	2.652	-2.652	0.769	-0.769





68	1.800	1.850	1.900	2.687	-2.687	0.783	-0.783
69	1.738	1.787	1.836	2.722	-2.722	0.798	-0.798
70	1.679	1.726	1.774	2.756	-2.756	0.812	-0.812
71	1.621	1.668	1.714	2.791	-2.791	0.827	-0.827
72	1.566	1.612	1.657	2.825	-2.825	0.842	-0.842
73	1.513	1.558	1.602	2.859	-2.859	0.857	-0.857
74	1.462	1.506	1.550	2.893	-2.893	0.872	-0.872
75	1.414	1.456	1.499	2.926	-2.926	0.887	-0.887
76	1.367	1.408	1.450	2.960	-2.960	0.902	-0.902
77	1.322	1.362	1.403	2.993	-2.993	0.917	-0.917
78	1.278	1.318	1.358	3.026	-3.026	0.932	-0.932
79	1.237	1.276	1.315	3.059	-3.059	0.947	-0.947
80	1.196	1.235	1.273	3.091	-3.091	0.963	-0.963
81	1.158	1.195	1.233	3.124	-3.124	0.978	-0.978
82	1.121	1.157	1.194	3.156	-3.156	0.993	-0.993
83	1.085	1.121	1.156	3.188	-3.188	1.009	-1.009
84	1.050	1.085	1.120	3.220	-3.220	1.025	-1.025
85	1.017	1.052	1.086	3.252	-3.252	1.040	-1.040
86	0.985	1.019	1.052	3.283	-3.283	1.056	-1.056
87	0.955	0.987	1.020	3.315	-3.315	1.072	-1.072
88	0.925	0.957	0.989	3.346	-3.346	1.088	-1.088
89	0.896	0.928	0.959	3.377	-3.377	1.104	-1.104
90	0.869	0.899	0.930	3.408	-3.408	1.120	-1.120
91	0.842	0.872	0.902	3.439	-3.439	1.136	-1.136
92	0.816	0.846	0.875	3.469	-3.469	1.153	-1.153
93	0.792	0.820	0.849	3.500	-3.500	1.169	-1.169
94	0.768	0.796	0.824	3.530	-3.530	1.185	-1.185
95	0.745	0.772	0.800	3.560	-3.560	1.202	-1.202
96	0.723	0.749	0.776	3.590	-3.590	1.218	-1.218
97	0.701	0.727	0.754	3.620	-3.620	1.235	-1.235
98	0.680	0.706	0.732	3.650	-3.650	1.251	-1.251
99	0.660	0.685	0.711	3.680	-3.680	1.268	-1.268
100	0.641	0.666	0.690	3.709	-3.709	1.285	-1.285
101	0.622	0.646	0.670	3.739	-3.739	1.302	-1.302
102	0.604	0.628	0.651	3.768	-3.768	1.319	-1.319
103	0.586	0.610	0.633	3.797	-3.797	1.336	-1.336
104	0.569	0.592	0.615	3.826	-3.826	1.353	-1.353
105	0.553	0.575	0.597	3.855	-3.855	1.370	-1.370
106	0.537	0.559	0.581	3.884	-3.884	1.387	-1.387
107	0.522	0.543	0.564	3.912	-3.912	1.404	-1.404
108	0.507	0.528	0.549	3.941	-3.941	1.422	-1.422
109	0.493	0.513	0.533	3.969	-3.969	1.439	-1.439
110	0.479	0.499	0.519	3.998	-3.998	1.457	-1.457
111	0.465	0.485	0.504	4.026	-4.026	1.474	-1.474

112	0.452	0.471	0.490	4.054	-4.054	1.492	-1.492
113	0.439	0.458	0.477	4.083	-4.083	1.509	-1.509
114	0.427	0.445	0.464	4.111	-4.111	1.527	-1.527
115	0.415	0.433	0.451	4.139	-4.139	1.545	-1.545
116	0.404	0.421	0.439	4.167	-4.167	1.563	-1.563
117	0.392	0.410	0.427	4.194	-4.194	1.581	-1.581
118	0.382	0.398	0.415	4.222	-4.222	1.599	-1.599
119	0.371	0.388	0.404	4.250	-4.250	1.617	-1.617
120	0.361	0.377	0.393	4.278	-4.278	1.635	-1.635
121	0.351	0.367	0.383	4.305	-4.305	1.653	-1.653
122	0.341	0.357	0.372	4.333	-4.333	1.671	-1.671
123	0.332	0.347	0.362	4.360	-4.360	1.690	-1.690
124	0.323	0.338	0.352	4.388	-4.388	1.708	-1.708
125	0.314	0.329	0.343	4.415	-4.415	1.727	-1.727

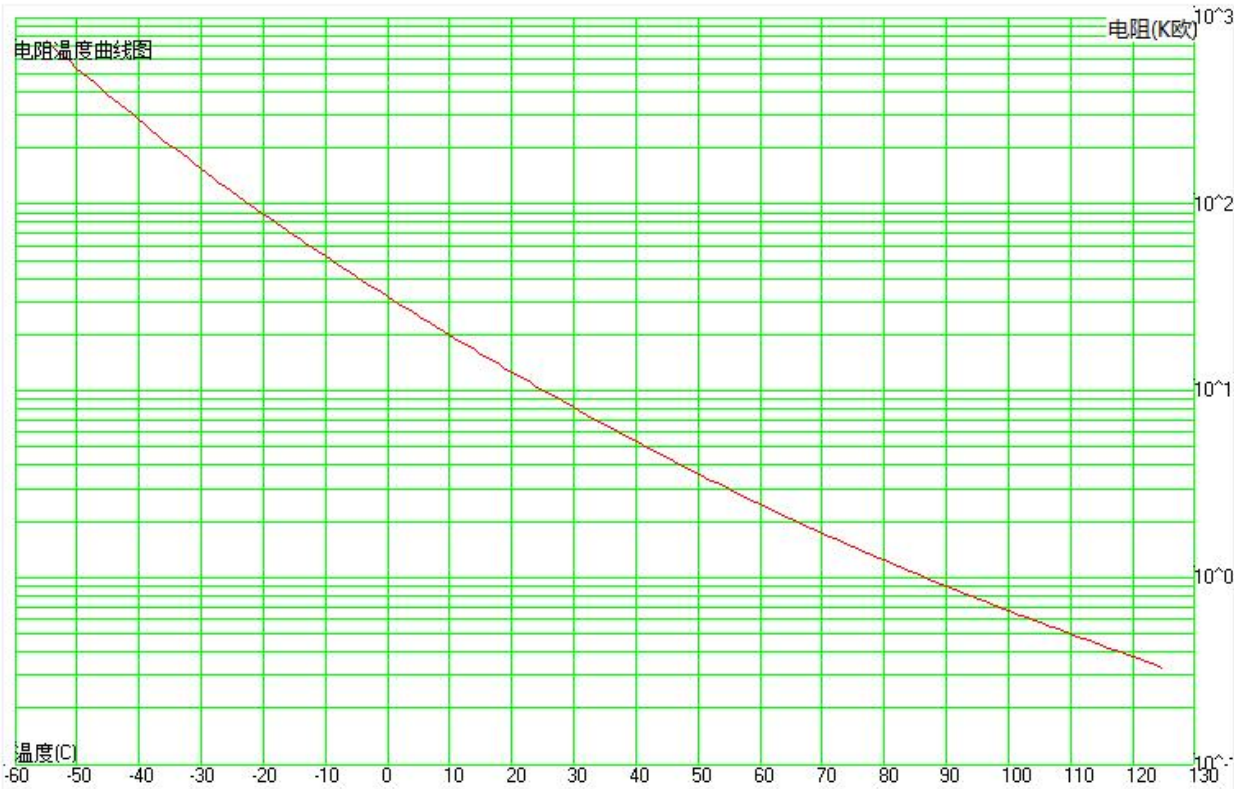

附表 II (Attachment II)

