NAKKA

NAKKA Environmental Appliance Technology Co., Ltd
Add: No.3 Zhongjian road, zhongyong industrial area, Leliu Town, Foshan City, Guangdong Province

Tel: 86-0757-25556223 E: nakka@nakka.cn

www.nakka.net

NAKKA

The Choice Of Life

# DC Frequency Conversion Fan

Bionic Natural Wind

www.nakka.net

NAKKA

# COMPANY PROFILE

NAKKA Smart DC Technology and products is a manufacturing enterprise that focuses on production and development of high technology smart appliances primarily with household floor fans, commercial, industrial and ventilation fans.

With a quality oriented attitude, innovative and pragmatic spirit of research and development within the Research and Development team our company has successfully developed and patented a DC (Direct Current) motor fan to be an industry leader. What makes this DC motor unique is it is more energy efficient, low noise, smooth operation which allows NAKKA products to last longer than other electric fans.

CE RoHS COMPLIANT ERP Energy-related Products RED

www.nakka.net

NAKKA

# OUR CERTIFICATION

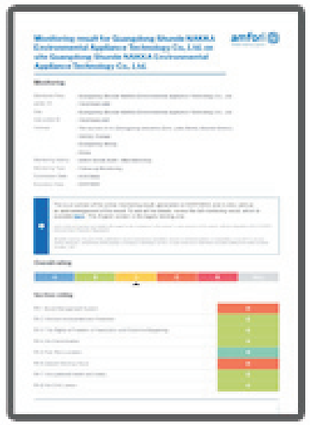

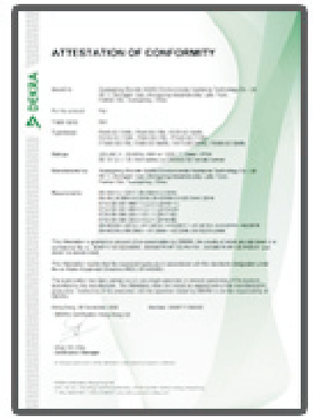


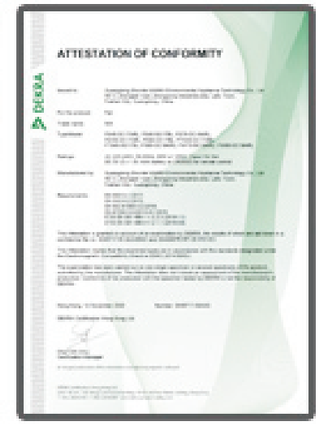

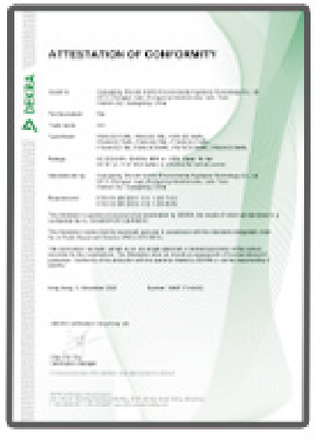

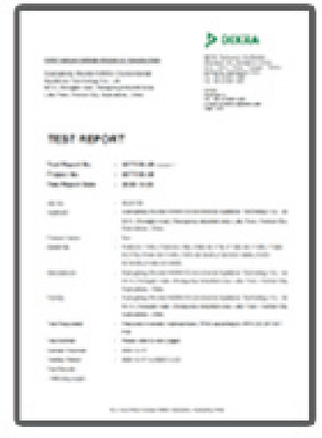


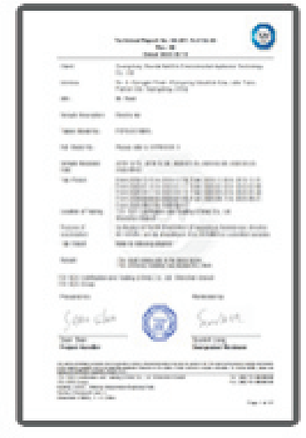

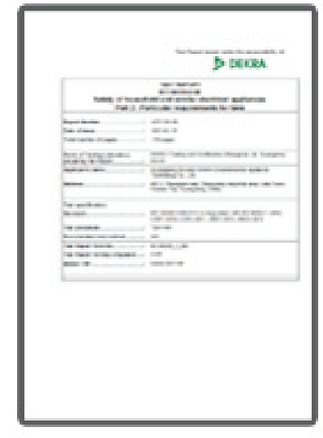


CCC CE RoHS SAA APPROVALS EMC DEKRA GS

# Fully Sealed Smart DC Motor 20 hours per day)

Moisture proof | Dust-proof | Energy conservation | Long-lasting

Energy Consumption Of Industrial Fan Per Month

DC 78 KW Lower energy consumption (

AC 161 KW

Low efficiency and high energy consumption (Work for 20 hours each day)

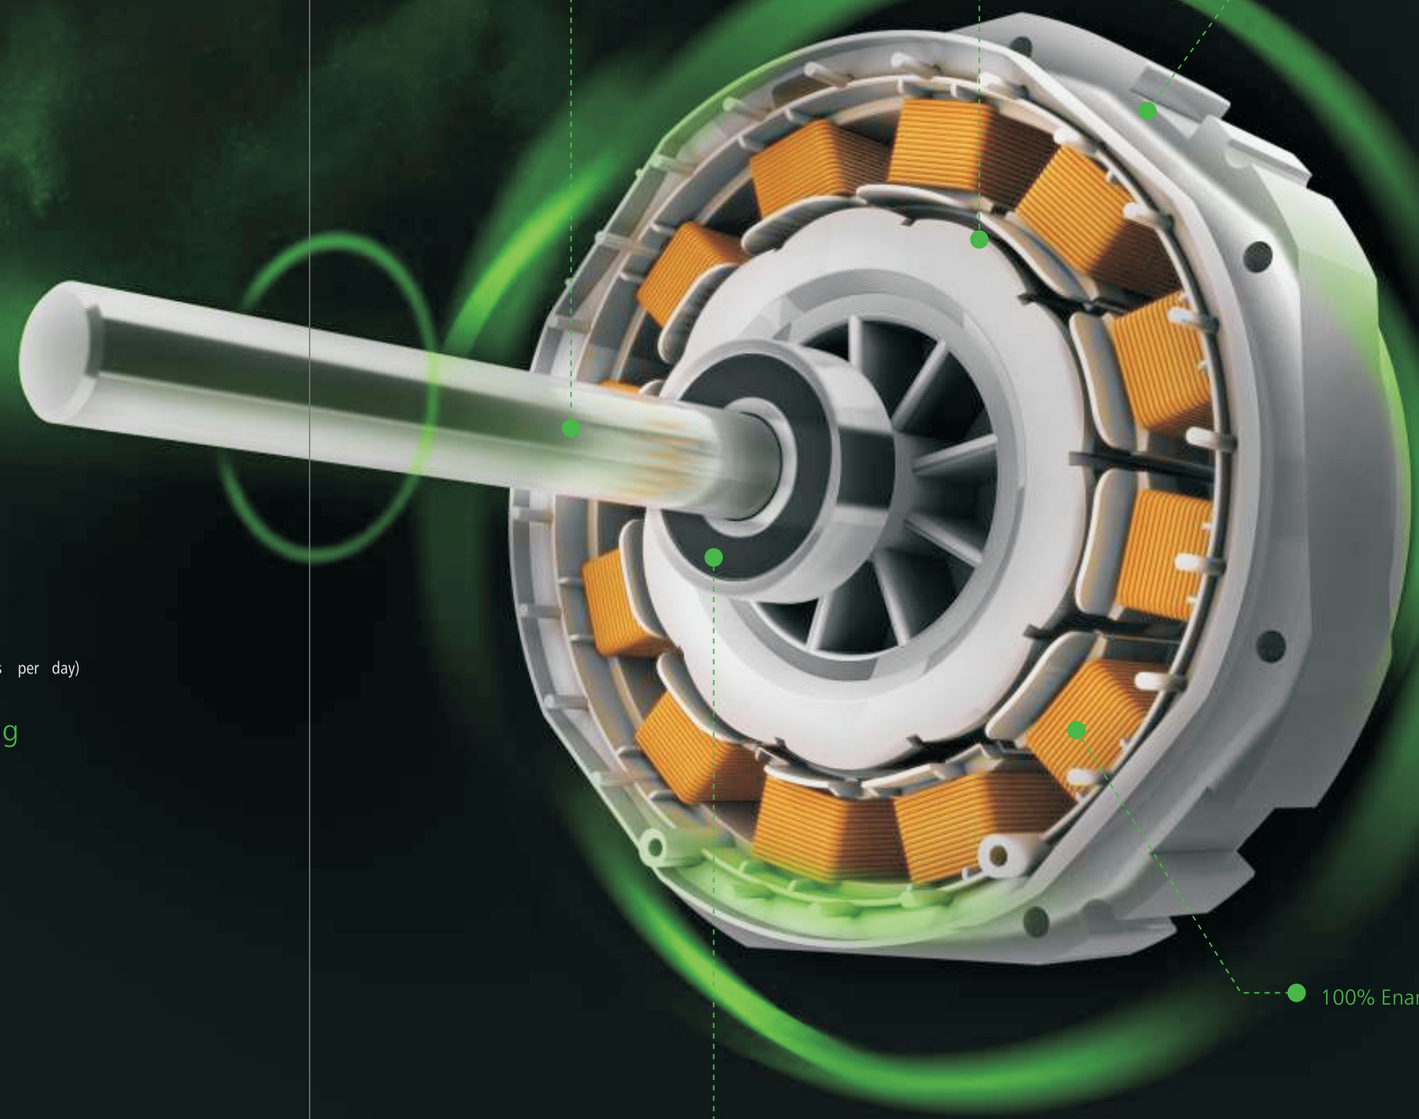

# DC motor

The sine wave noise reduction technology makes the motor work more quiet.

## Sine Wave Schematic Diagram

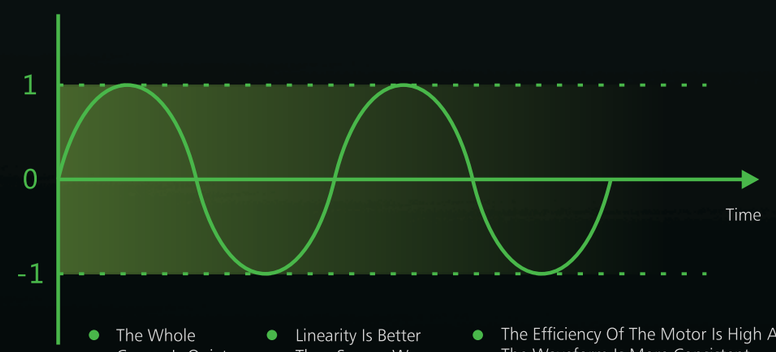


- The Whole Course Is Quiet
- Linearity Is Better Than Square Wave
- The Efficiency Of The Motor Is High And The Waveform Is More Consistent With The Working Principle Of The Motor

## Square Wave Schematic Diagram

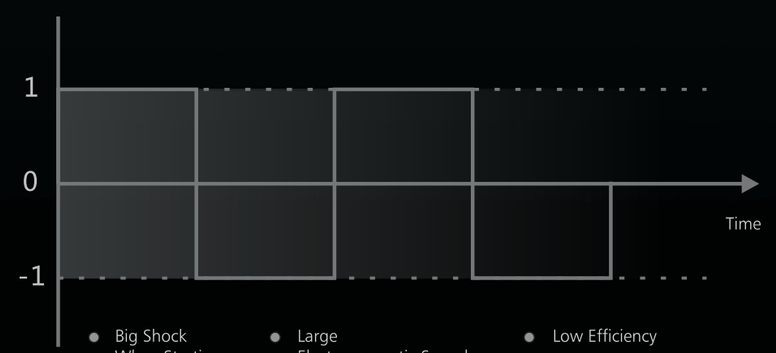


- Big Shock When Starting
- Large Electromagnetic Sound
- Low Efficiency

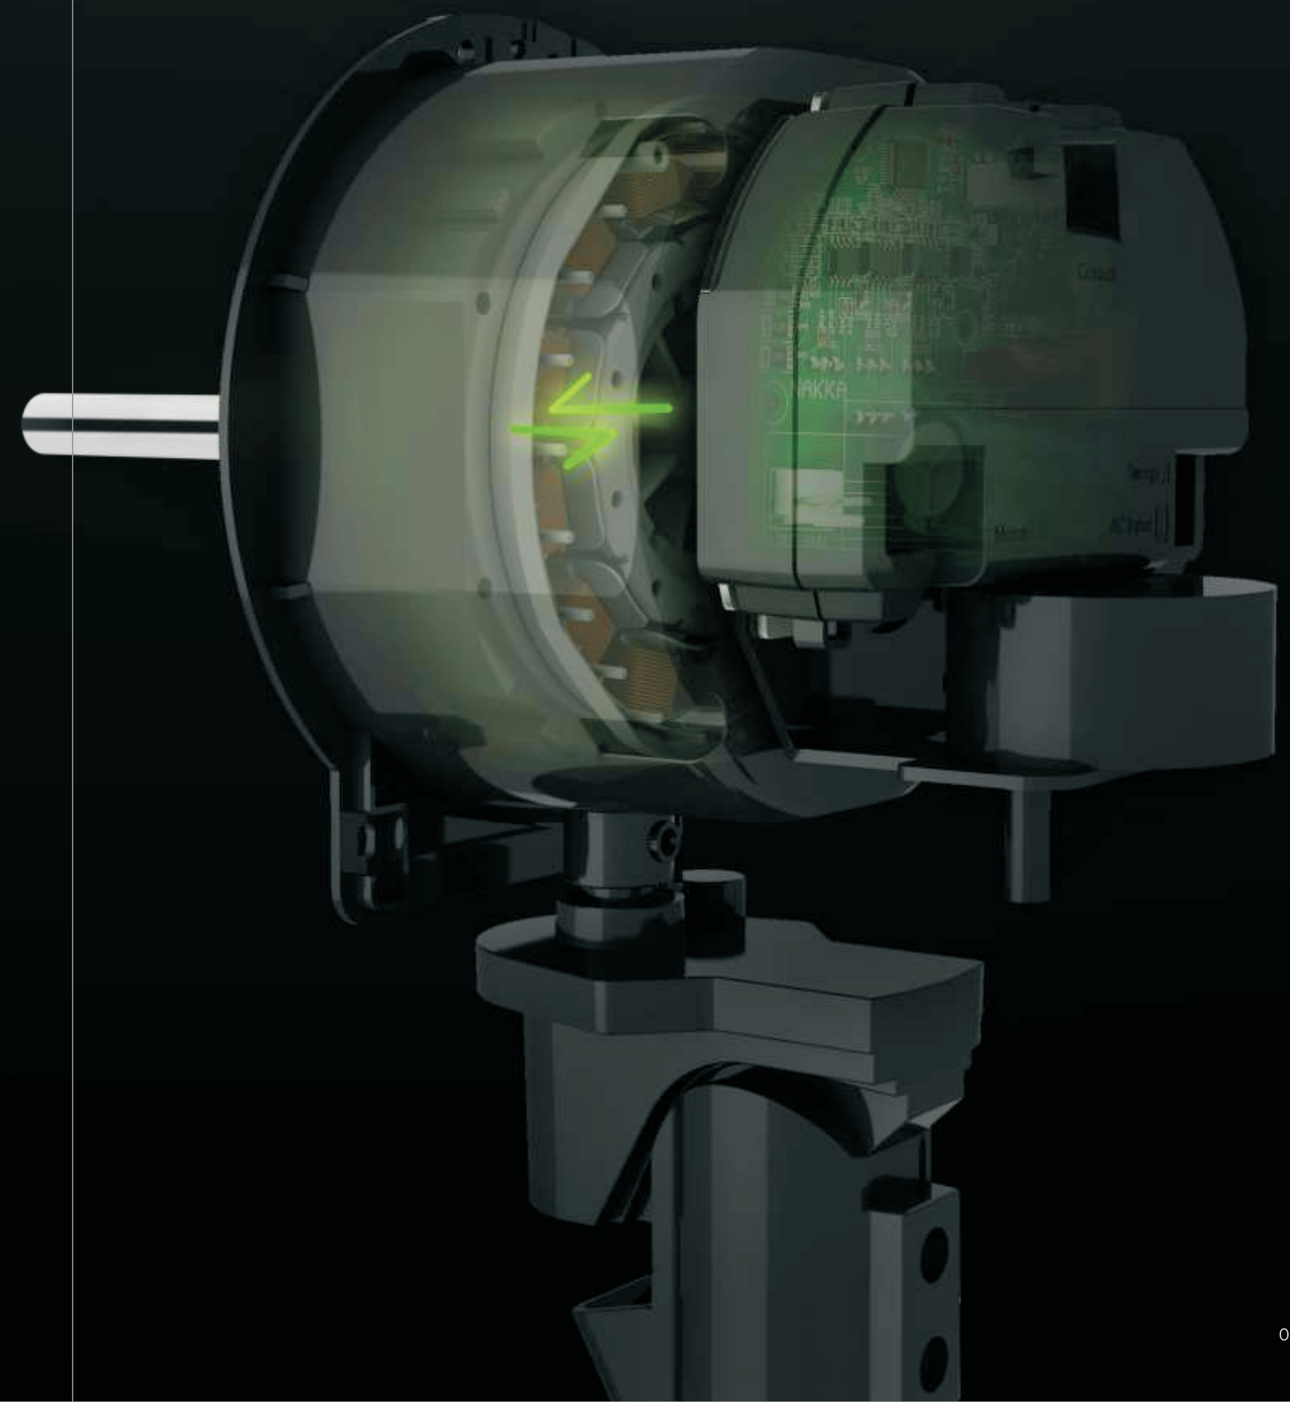

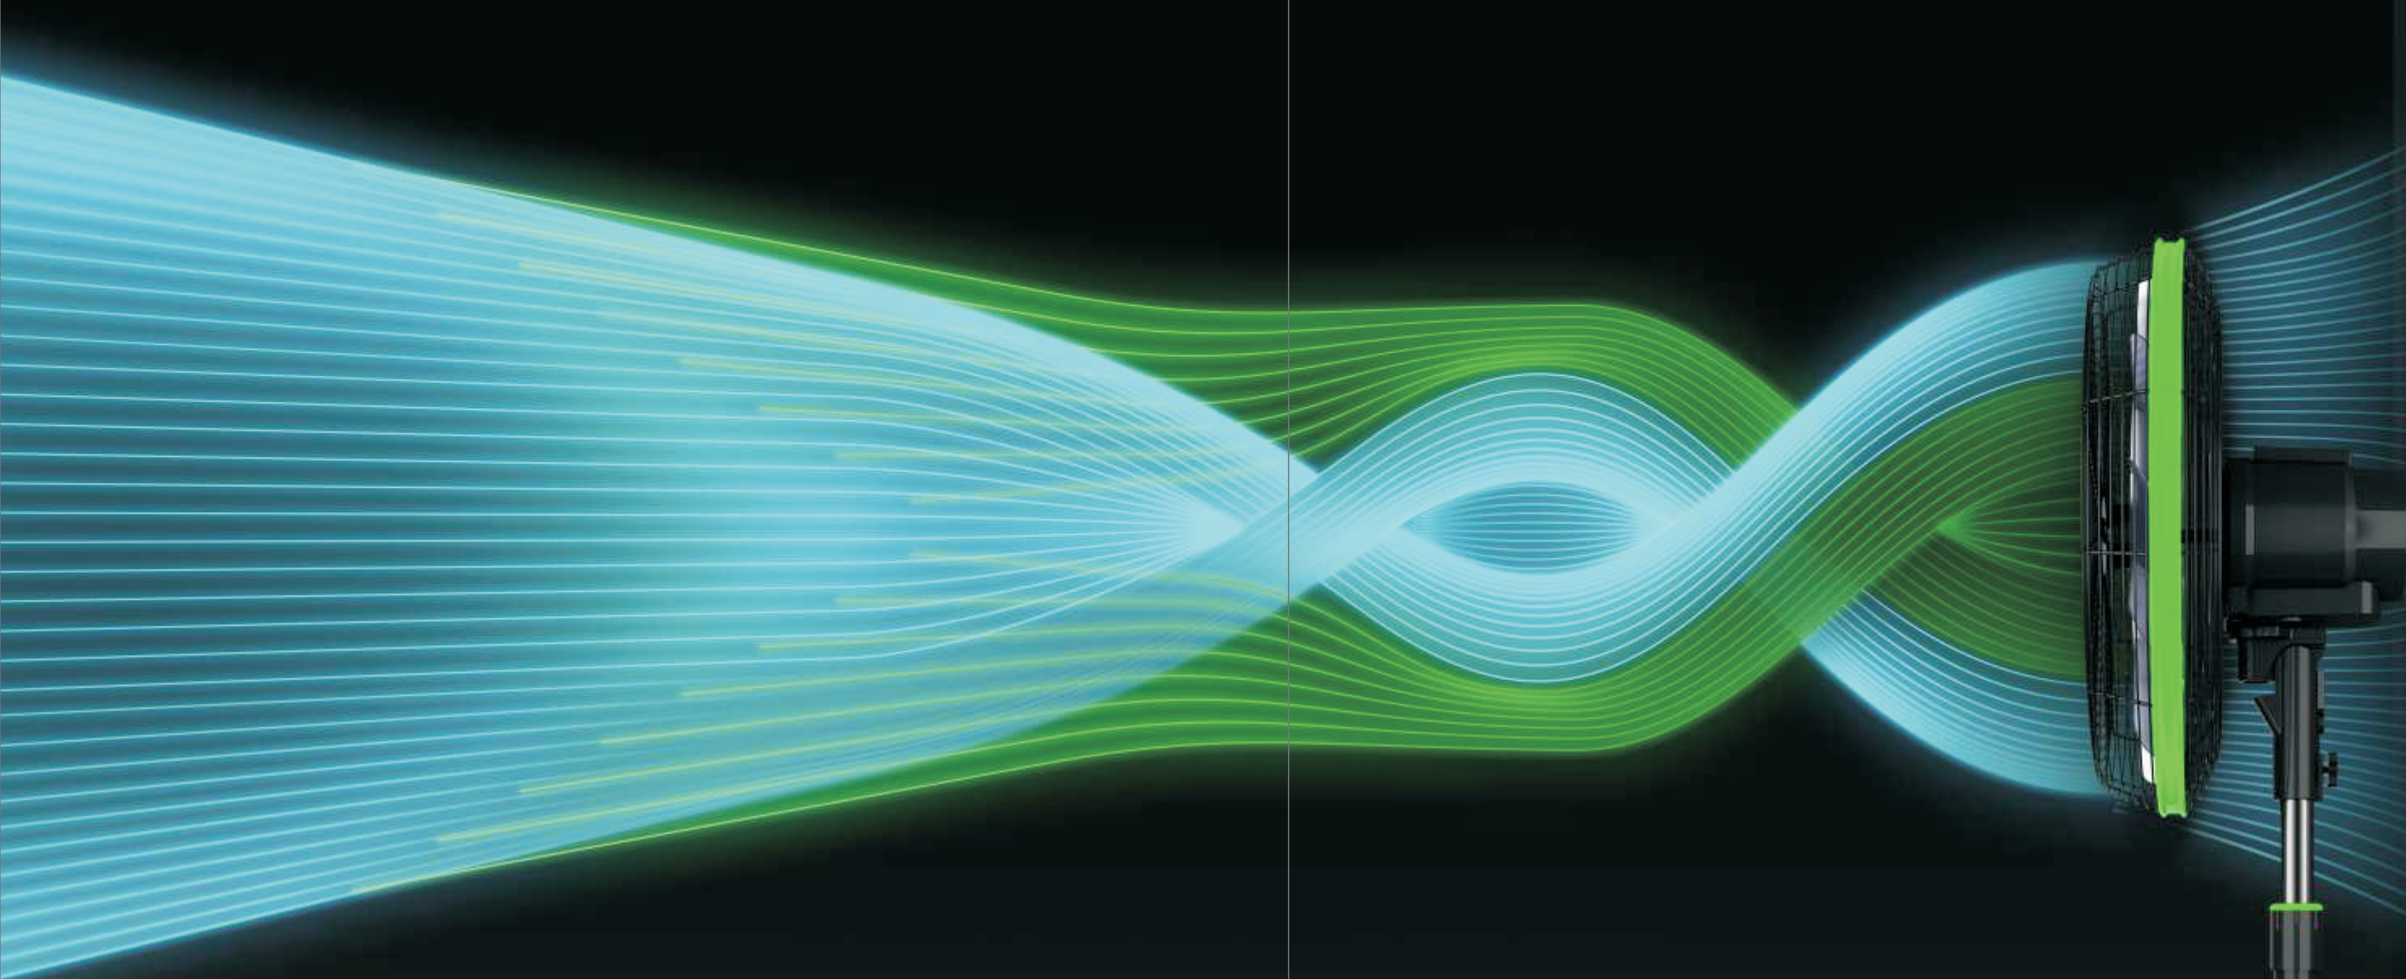

# Double Ring Spiral Wind
# More Gentle Natural Wind Sense

Inside and outside double layer knob wind channel, like a trumpet-type wind channel for an all around even spread of the wind.

The true sense of natural wind.

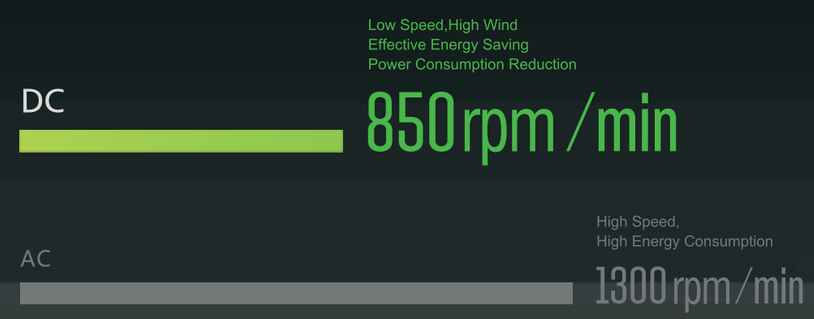

# Disordered Frequency Conversion Bionic Natural Wind

The three-dimensional smooth and disorderly wind shows the wind speed, and the air volume is fast and slow.
Strong, weak, random, not repeated, but it is the closest to the natural world.

Air volume frequency 600 times per minute




Frequency conversion bionic natural wind equation algorithm

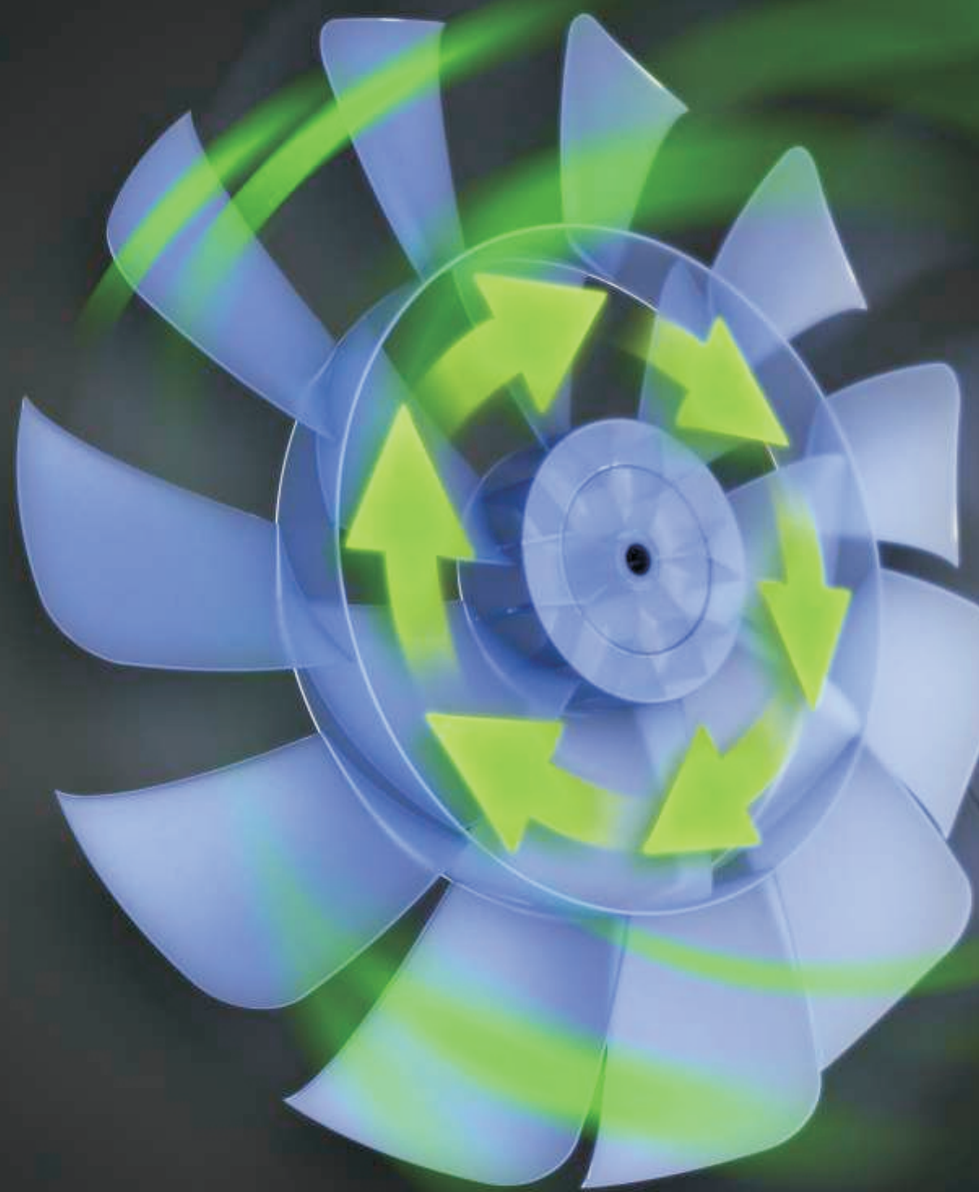

# 18 Blades Design Mute Technique

The wind cutting is more uniform, the wind is soft and the air supply is wider.

18 Blade Air Volume

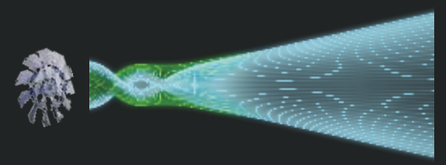

5 Blade Air Volume



# Wide-angle Air Supply

Wide-angled shaped air supply angle is up to 120 degrees enables every person in the room, where ever located enjoy the cool breeze and feel from theEC fan.

Up And Down

35°

Shake Your Head

90°

Extended Height

27cm

# Remote Control

Wireless remote control uses 433Hz radio remote control technology.The Smart DC fan can effectively be controlled over 20 meters in an open area.

Equipped with a magnetic device for easy storage on the face of the DC fan.

RF Remote Control



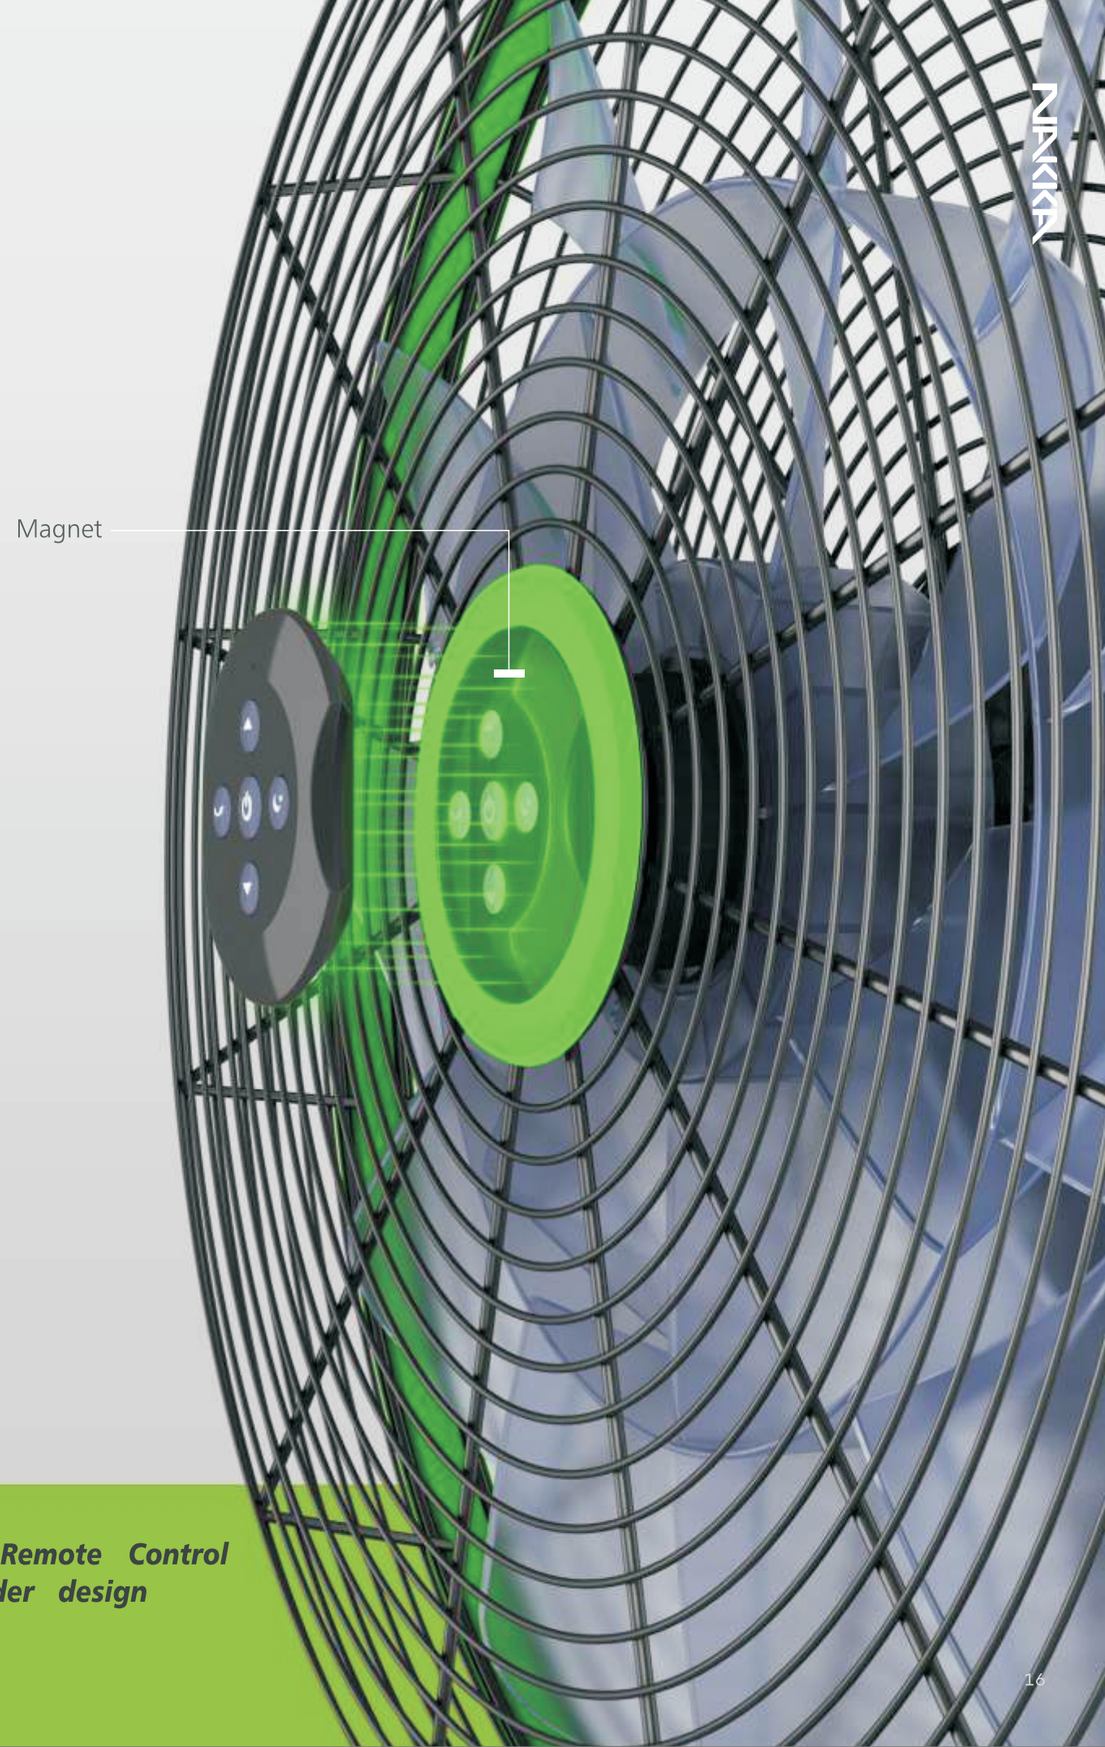


***Unique Remote Control holder design***

# Multi-protection System

Overcurrent protection | Overvoltage protection | Motor blockage protect

Patented Fan Grill Net Cover with a circular structure, double-track sided frame
with safety lock for additional protection for smaller hands and fingers

Main line diameter | Vice line diameter | Line spacing

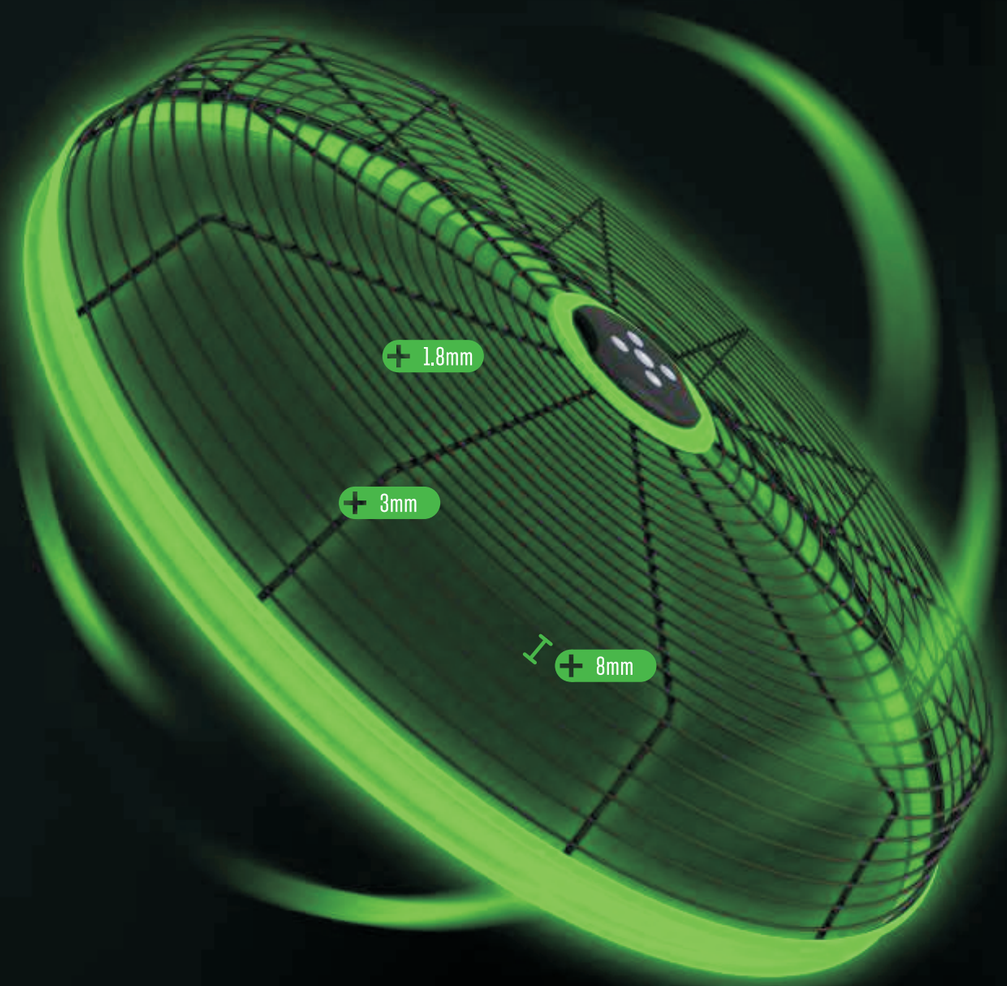


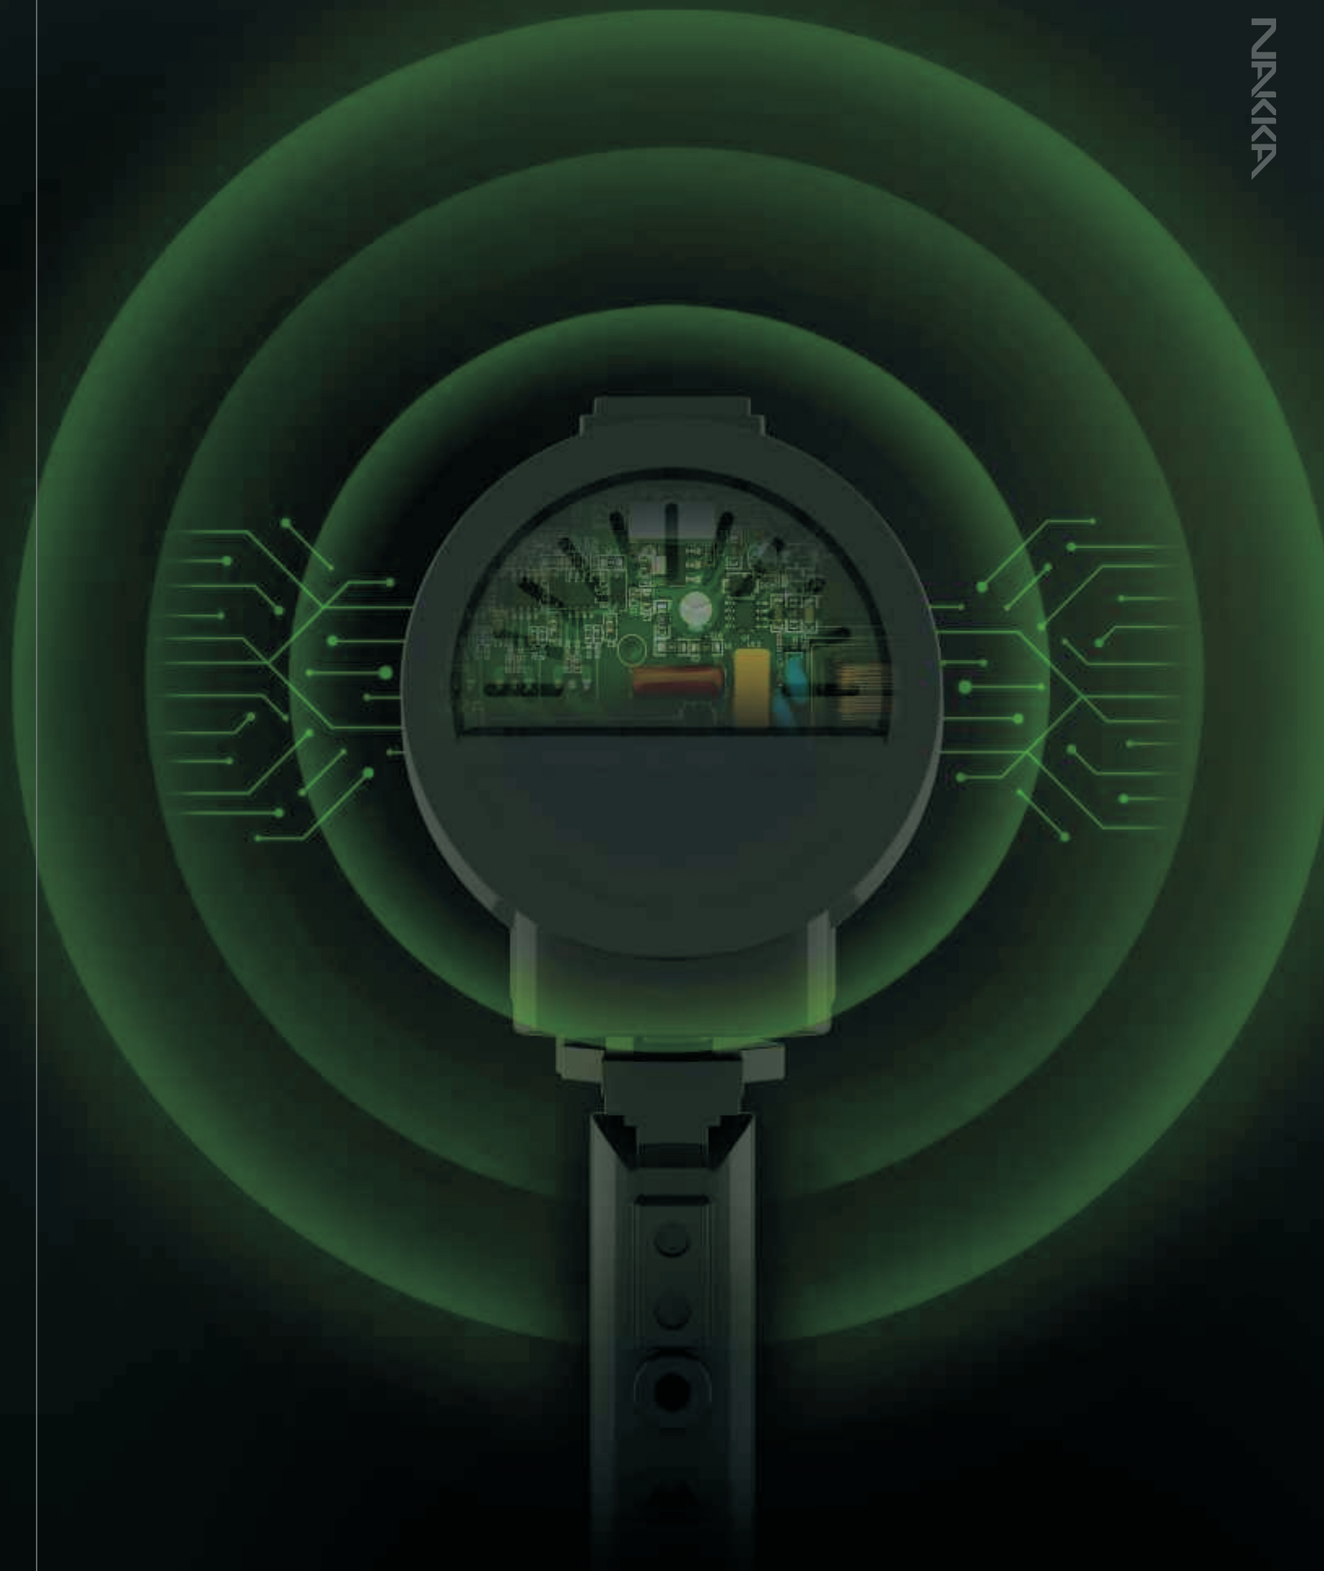

# A Quiet Time That Is Not Disturbed

## Undisturbed And Peaceful Sleep
## Operating With Low Noise, Soft And Quiet.

The combination of gentle and natural wind and a comfortable environment makes you feel as if you are in nature.

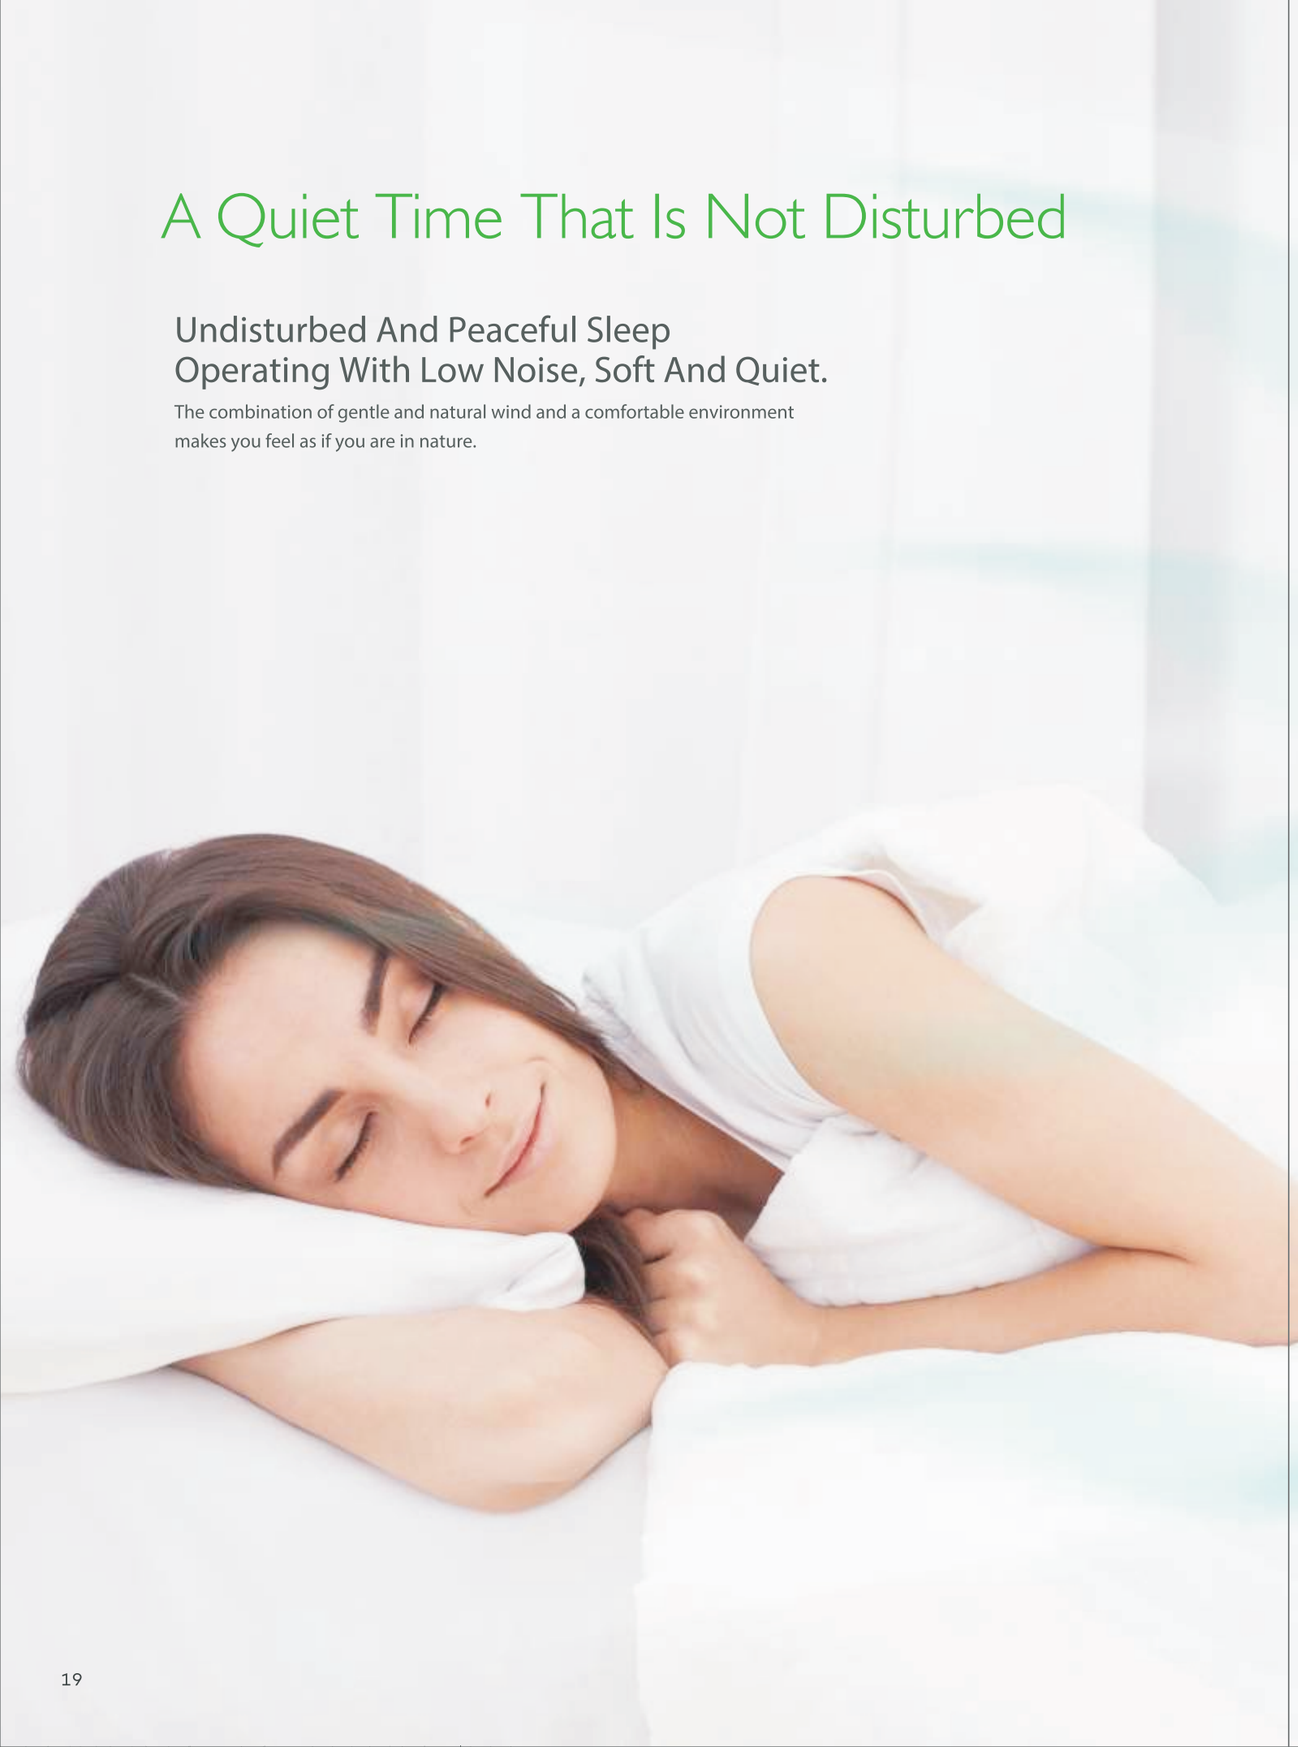

# Intelligent Timer Setting

An automatic shutdown time up to 9 hours, depending on your current room environment to ensure a more comfortable experience.

NAKKA

# Intelligent Control

3 Different Type Of Wind Function
6 Levels Of Wind Speed

RF REMOTE CONTRL

WiFi

6 Gear Speed Adjustable

Natural wind

Sleep wind

# Smart DC Commercial Fan Series

Smart DC Commercial Series

CE RoHS ERP RED

# DC Frequency Conversion Fan

NAKKA

## Model: FS45-DC17ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

| | | |
|---|---|---|
| Size | 18 inch (450mm) | |
| Rated power | 90W | |
| Rated voltage(V) | 200-240V/100-120V | |
| Maximum wind volume | 167 m³/min | |
| Fan sound power level | 56db | |
| Adjustable in height | 108-135cm | |
| Left&right air supply angle | 90° | |
| Up&down air supply angle | 35° | |
| Controler frequency | 433Hz | |
| Gross weight | 11.6kg | |
| Net weight | 9.7kg | |
| Packing size | 52*35*53cm | 73.5*19.5*52.5cm |
| 20 GP capacity | 256 | 419 |
| 40 GP capacity | 520 | 838 |
| 40 HC capacity | 604 | 959 |

## Model: FS45D-DC17ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

| | |
|---|---|
| Size | 18 inch (450mm)*2 |
| Rated power | 18W-180W |
| Rated voltage(V) 8W-90W | 200-240V/100-120V |
| Maximum wind volume | 167*2 m³/min |
| Fan sound power level | 56*2 db |
| Adjustable in height | 155-170cm |
| Left&right air supply angle | 90° |
| Up&down air supply angle | 35° |
| Controler frequency | 433Hz |
| Gross weight | 20.8kg |
| Net weight | 18.1kg |
| Packing size | 83*24.5*54cm |
| 20 GP capacity | 252 |
| 40 GP capacity | 508 |
| 40 HC capacity | 568 |

Smart DC Commercial Series 8W-160W

CE RoHS ERP RED

## Model: FM45-DC17ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

| | |
|---|---|
| Size | 18 inch (450mm) |
| Rated power | 160W |
| Rated voltage(V) | 200-240 |
| Maximum wind volume | 167 m³/min |
| Fan sound power level | 56db |
| Water tank volume | 2 liter |
| Continuous spray | 5-8 hours |
| Effective area | 20 m |
| Spray droplet | 0.05-0.20mg |
| Controler frequency | 433Hz |
| Gross weight | 14.5kg |
| Net weight | 12kg |
| Packing size | 52*50*52cm |
| 20 GP capacity | 176 |
| 40 GP capacity | 384 |
| 40 HC capacity | 480 |

RF REMOTE CONTROL

# DC Frequency Conversion Fan

NAKKA

## Model: FS45-DC17BL / FS50-DC17BL

DC Motor | Strong wind | Mute | Controle Panel | Energy conservation | Safety Refinements

| | FS45-DC17BL | FS50-DC17BL |
|---|---|---|
| Size | 18 inch (450mm) | 20 inch (500mm) |
| Rated power | 4W-90W | 4W-90W |
| Rated voltage(V) 87 | 200-240V/100-120V | |
| Maximum wind volume | 167 m³/min | 167 m³/min |
| Fan sound power level | 63db | 63db |
| Adjustable in height | 108-135cm | |
| Left&right air supply angle | 90° | |
| Up&down air supply angle | 35° | |
| Gross weight | 10.8kg | 12kg |
| Net weight | 8.9kg | 10.3kg |
| Packing size | 73*19*52.5cm | 79*20*58cm |
| 20 GP capacity | 419 | 324 |
| 40 GP capacity | 838 | 660 |
| 40 HC capacity | 959 | 715 |

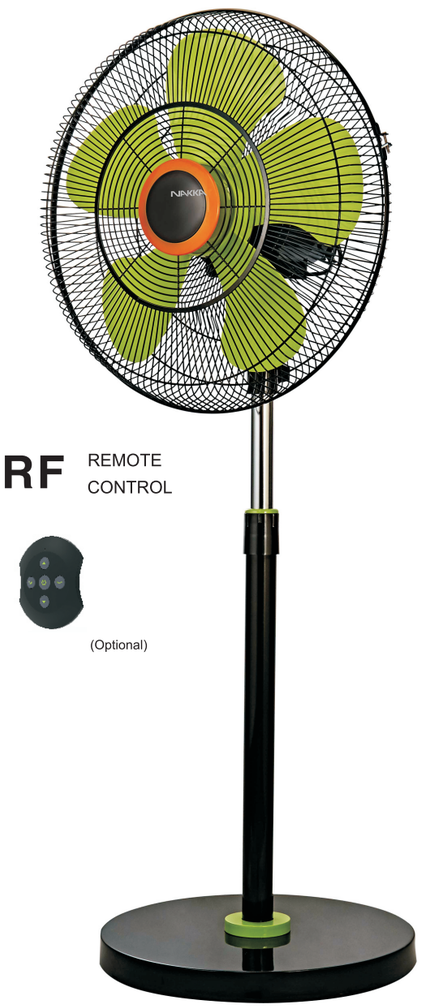

RF REMOTE CONTROL

(Optional)

Smart DC Commercial Series

CE RoHS ERP RED

## Model: FTS45-DC17ARL

Strong wind

Mute

Remote Control

DC Motor

Energy conservation

Safety Refinements

RF REMOTE CONTROL

| | |
|---|---|
| Size | 18 inch (450mm) |
| Rated power | 18W-90W |
| Fan sound power level | 56db |
| Adjustable in height | 58cm |
| Left&right air supply angle | 90° |
| Up&down air supply angle | 35° |
| Controler frequency | 433Hz |
| Gross weight | 11.6kg |
| Net weight | 9.7kg |
| Packing size | 73.5*19.5*52.5cm |

| | |
|---|---|
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 167 m³/min |
| 20 GP capacity | 419 |
| 40 GP capacity | 838 |
| 40 HC capacity | 959 |



DC Frequency Conversion Fan

NAKKA

## Model: FTS45-DC17BL

Strong wind

Mute

Controle Panel

DC Motor

Energy conservation

Safety Refinements

RF REMOTE CONTROL

(Optional)

| | |
|---|---|
| Size | 18 inch (450mm) |
| Rated power | 4W-90W |
| Fan sound power level | 63db |
| Adjustable in height | 58cm |
| Left&right air supply angle | 90° |
| Up&down air supply angle | 35° |
| Gross weight | 11.6kg |
| Net weight | 9.7kg |
| Packing size | 73.5*19.5*52.5cm |

| | |
|---|---|
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 167 m³/min |
| 20 GP capacity | 419 |
| 40 GP capacity | 838 |
| 40 HC capacity | 959 |

Smart DC Commercial Series 3db

CE RoHS ERP RED

# DC Frequency Conversion Fan

NAKKA

## Model: FW45-DC17ARL

Strong wind
Mute
Remote Control
DC Motor
Energy conservation
Safety Refinements

RF REMOTE CONTROL

| | |
|---|---|
| Size | 18 inch (450mm) |
| Rated power | 18W-90W |
| Fan sound power level | 56db |
| Left&right air supply angle | 90° |
| Up&down air supply angle | 35° |
| Controler frequency | 433Hz |

| | |
|---|---|
| Gross weight | 10.8kg |
| Net weight | 8.9kg |
| Packing size | 52.5*29*53.5cm |

| | |
|---|---|
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 167 m³/min |
| 20 GP capacity | 352 |
| 40 GP capacity | 720 |
| 40 HC capacity | 899 |



## Model: FW45-DC17BRL

Strong wind
Mute
Remote Control
DC Motor
Energy conservation
Safety Refinements

RF REMOTE CONTROL

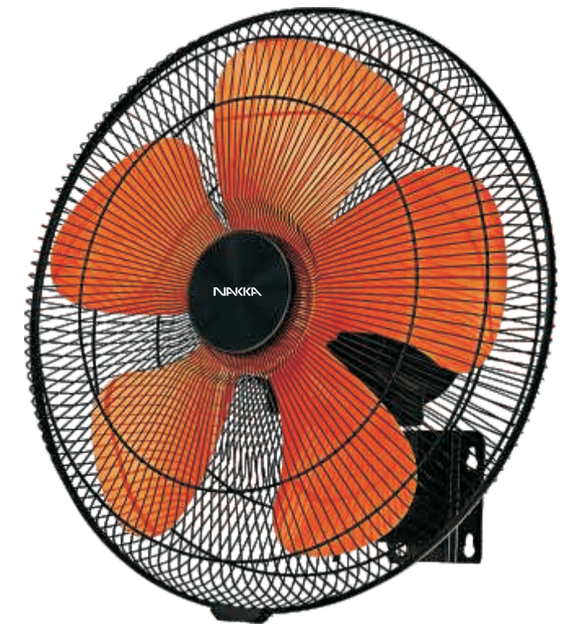


| | |
|---|---|
| Size | 18 inch (450mm) |
| Rated power | 4W-90W |
| Fan sound power level | 56db |
| Left&right air supply angle | 90° |
| Up&down air supply angle | 35° |
| Controler frequency | 433Hz |

| | |
|---|---|
| Gross weight | 10.8kg |
| Net weight | 8.9kg |
| Packing size | 52.5*27.5*53.5cm |

| | |
|---|---|
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 167 m³/min |
| 20 GP capacity | 352 |
| 40 GP capacity | 720 |
| 40 HC capacity | 899 |

# Smart DC Industrial Fan Series

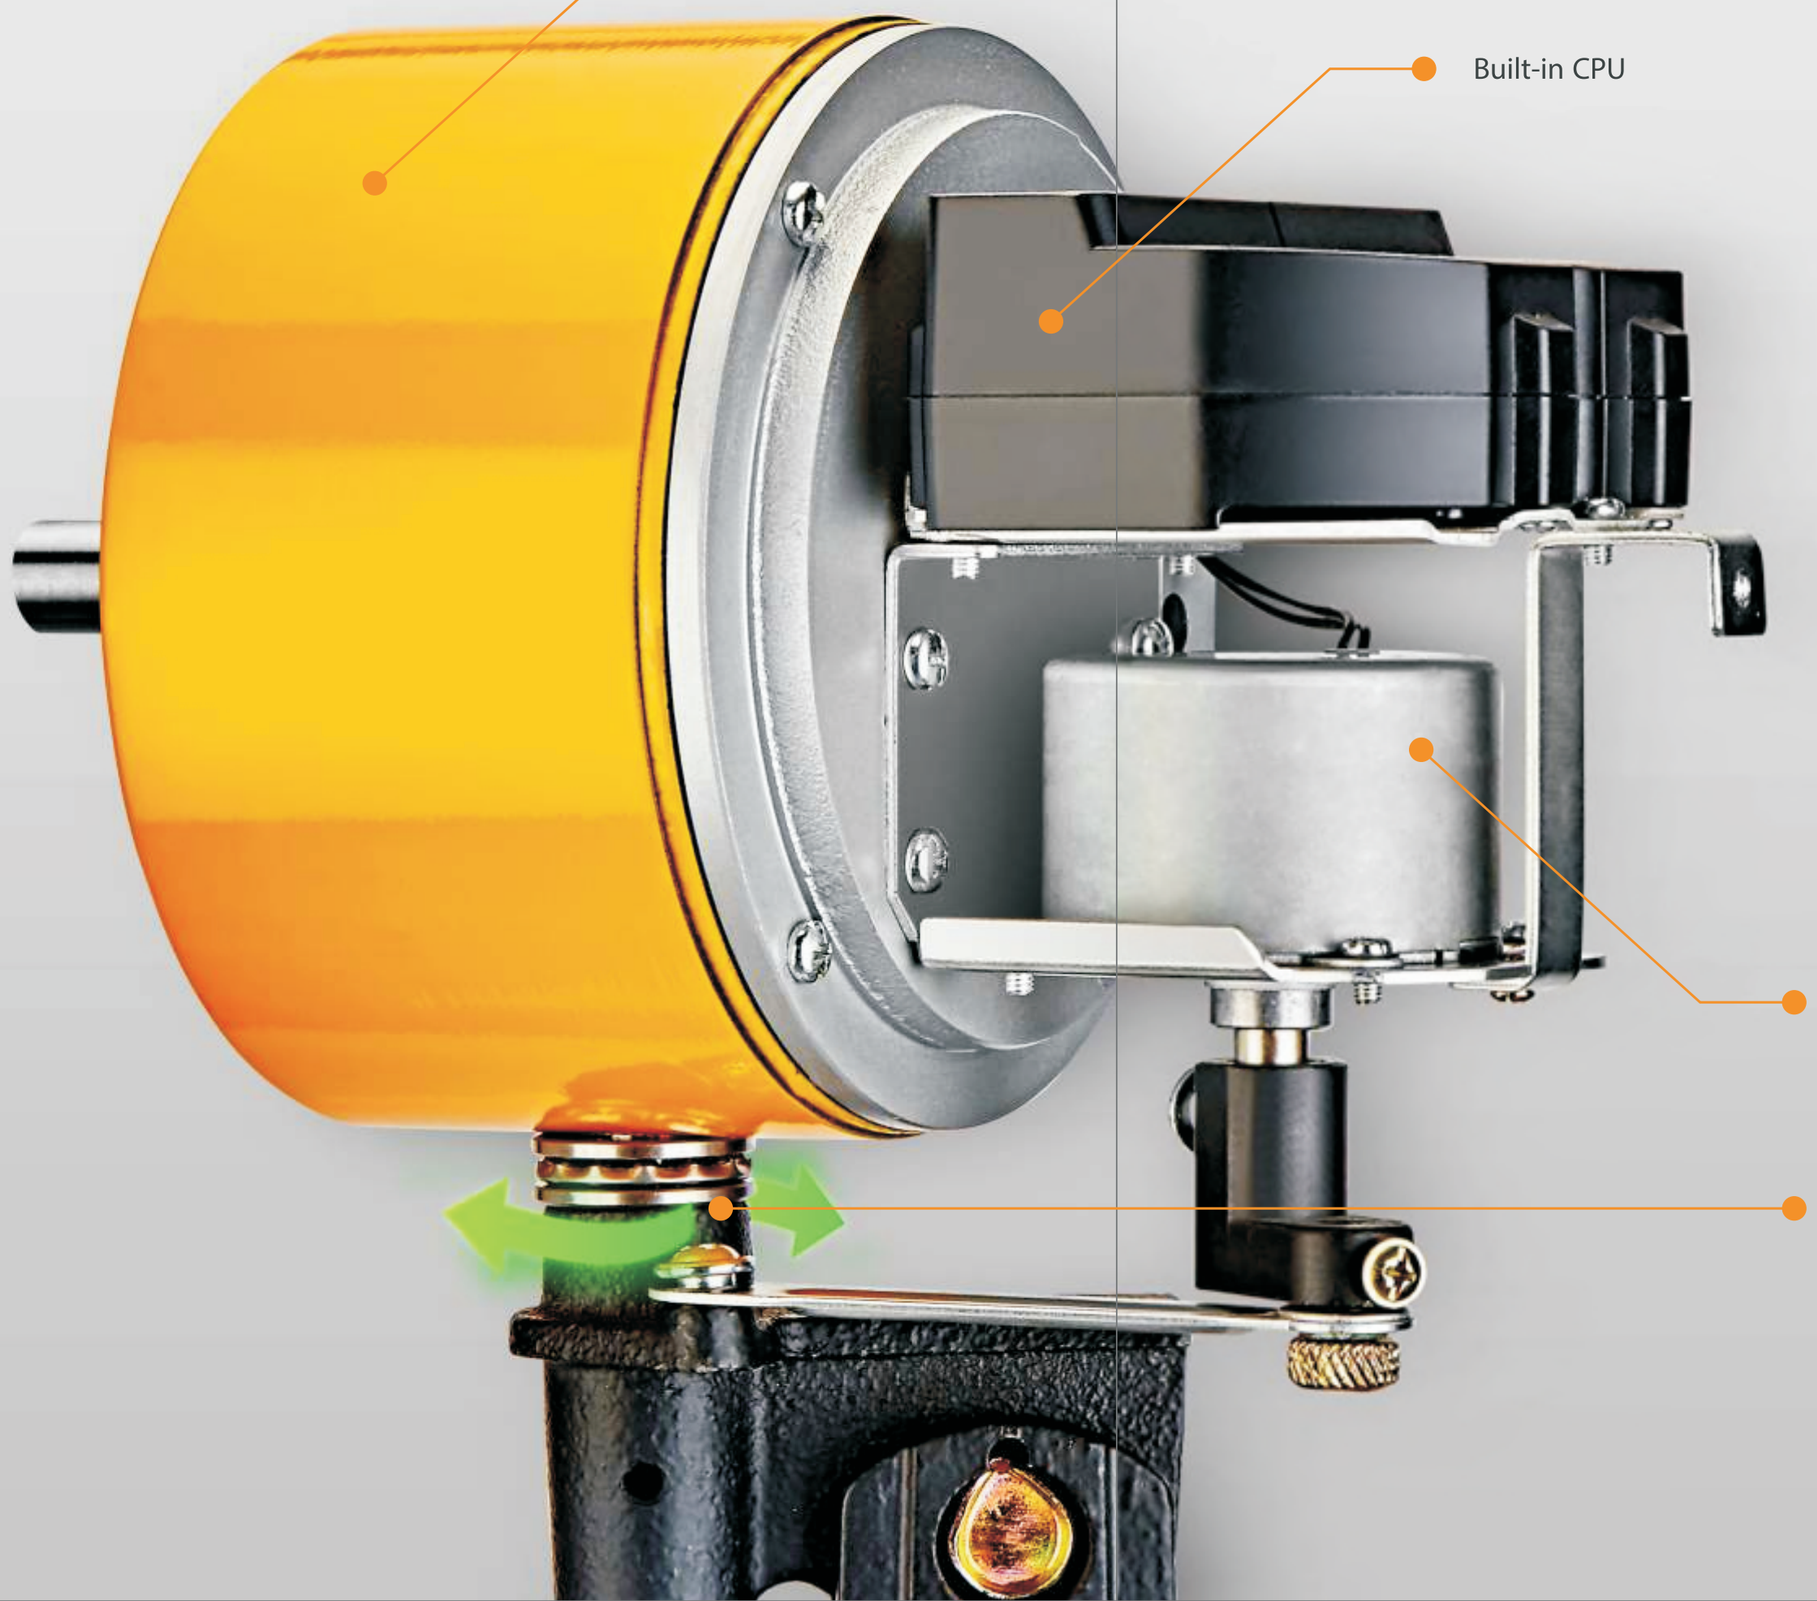


# Science and Electronic Technology

Using high-torque synchronous motor electronic control Technology, the swing of the head angle can be freely controlled.

The plate  bearing is included in the design to support the main patented DC motor, Which greatly reduces the friction generated by the fan pendulum so that the synchronous motor has less stress and prolongs the service life of NAKKA smart DC commercial and industrial fans.

Smart DC Industrial F Series

CE RoHS COMPLIANT ERP Energy-related Products RED

## Model: FS75-DC17ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### Performance

| | |
|---|---|
| **Pole** | Adjustable pole |
| **Base** | 8kg plastic pedestal (can past 12" ramp testing ) |
| **Grill** | 30 inch 24 lines strong grill (pass the finger testing ) |
| **Blade** | 30 inch 3 blades Aluminum design ( lowest noise , max air volume) |
| **Power Cable** | 3*0.75mm 100% copper power line( The length of the power cord is 1.8m) |

| | |
|---|---|
| Size | 30 inch (750mm) |
| Rated power | 25W-130W |
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 314.6m³/min |
| Fan sound power level | 72db |
| Left&right air supply angle | 75° |
| Up&down air supply angle | 40° |
| Adjustable in height | 151-168cm |

| | |
|---|---|
| Gross weight | 24kg |
| Net weight | 21.2kg |
| Packing size | 82.5*8*82.5cm<br>25*19*32cm<br>52.5*8.5*52.5cm<br>7*7*98cm |
| One fan one container | 85*20.5*85cm |

| | | |
|---|---|---|
| 20 GP capacity | 300 | 172 |
| 40 GP capacity | 650 | 324 |
| 40 HC capacity | 740 | 408 |

RF REMOTE CONTROL

# DC Frequency Conversion Fan

NAKKA

## Model: FS65-DC17BL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### Performance

| | |
|---|---|
| **Pole** | Adjustable pole |
| **Base** | 7kg plastic pedestal (can past 12" ramp testing ) |
| **G** | 26 inch 16 lines strong grill (pass the finger testing ) |
| **Blade** | 26 inch 3 blades Aluminum design ( lowest noise , max air volume) |
| **Power Cable** | 3*0.75mm 100% copper power line( The length of the power cord is 1.8m ) |

| | |
|---|---|
| Size | 26 inch (650mm) |
| Rated power | 20W-130W |
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 251 m³/min |
| Fan sound power level | 63db |
| Left&right air supply angle | 75° |
| Up&down air supply angle | 40° |
| Adjustable in height | 145-162cm |

| | |
|---|---|
| Gross weight | 20.7kg |
| Net weight | 18.7kg |
| Packing size | 72*8*72cm<br>25*19*32cm<br>52.5*8.5*52.5cm<br>7*7*98cm |
| One fan one container | 97*21*73cm |

| | | |
|---|---|---|
| 20 GP capacity | 350 | 198 |
| 40 GP capacity | 730 | 402 |
| 40 HC capacity | 830 | 473 |

RF REMOTE CONTROL

Smart DC Industrial F Series

CE RoHS COMPLIANT ERP Energy-related Products RED

# DC Frequency Conversion Fan

NAKKA

## Model: FW75-DC17ARL

DC motor · Strong wind · Mute · Remote Control · Energy conservation · Safety Refinements

### Performance

**Grill** 30 inch 24 lines strong grill (pass the finger testing )
**Blade** 30 inch 3 blades Aluminum design ( lowest noise , max air volume)
**Power Cable** 3*0.75mm 100% copper power line( The length of the power cord is 1.8m )

| | |
|---|---|
| Size | 30 inch (750mm) |
| Rated power | 25W-130W |
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 72db |
| Fan sound power level | 314m³/min |
| Left&right air supply angle | 75° |
| Up&down air supply angle | 40° |

| | |
|---|---|
| Gross weight | 14.14kg |
| Net weight | 11.9kg |
| Packing size | 82.5*8*82.5cm<br>25.5*19*32cm |
| One fan one box | 85*20.5*85 cm |

| | | |
|---|---|---|
| 20 GP capacity | 435 | 180 |
| 40 GP capacity | 900 | 376 |
| 40 HC capacity | 1000 | 471 |

**RF** REMOTE CONTROL

## Model: FW65-DC17ARL

DC motor · Strong wind · Mute · Remote Control · Energy conservation · Safety Refinements

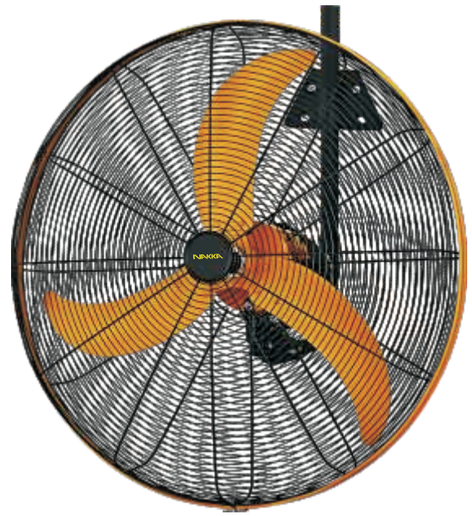

### Performance

**Grill** 26 inch 12 lines strong grill
**Blade** 26 inch 3 blades Aluminum design ( lowest noise , max air volume)
**Power Cable** 3*0.75mm 100% copper power line( The length of the power cord is 1.8m )

| | |
|---|---|
| Size | 26 inch (650mm) |
| Rated power | 20W-130W |
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 72db |
| Fan sound power level | 314m³/min |
| Left&right air supply angle | 75° |
| Up&down air supply angle | 40° |

| | |
|---|---|
| Gross weight | 10.72kg |
| Net weight | 9.65kg |
| Packing size | 72*8*72cm<br>25.5*19*32cm |
| One fan one box | 97*21*73cm |

| | | |
|---|---|---|
| 20 GP capacity | 350 | 198 |
| 40 GP capacity | 730 | 402 |
| 40 HC capacity | 830 | 473 |

**RF** REMOTE CONTROL

Smart DC Waterproof Fan Series

CE RoHS COMPLIANT ERP Energy-related Products RED

## Model: FD60-DC20ARL-P

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### Ip44 WATERPROOF FAN

| | |
|---|---|
| Size | 24 INCH |
| Rated power | 110W |
| Rated voltage(V) | 200-240V/100-120V |
| Oscillation Degree | 360° |
| Control panel | touched control panel |
| Function | 6 wind speeds, 9h timer, strong wind mode |

| | |
|---|---|
| Gross weight | 14.5kg |
| Net weight | 12.5kg |
| Packing size | 76.5*24*78cm |

| | |
|---|---|
| 20 GP capacity | 195 |
| 40 GP capacity | 411 |
| 40 HC capacity | 459 |

**RF** REMOTE CONTROL

DC Frequency Conversion Fan

NAKKA

## Model: FW50-DC20ARL-P

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### Ip44 WATERPROOF FAN

| | |
|---|---|
| Size | 20 INCH |
| Rated power | 135W |
| Rated voltage(V) | 200-240V/100-120V |
| Oscillation Degree | 360° |
| Control panel | touched control panel |
| Fan mode | 6 wind speeds, 9h timer, strong wind mode |

| | |
|---|---|
| Gross weight | 7.8kg |
| Net weight | 6.6kg |
| Packing size | 62*20*63cm |

| | |
|---|---|
| 20 GP capacity | 369 |
| 40 GP capacity | 768 |
| 40 HC capacity | 929 |

**RF** REMOTE CONTROL

Smart DC Waterproof Fan Series

CE RoHS COMPLIANT ERP Energy-related Products RED

# DC Frequency Conversion Fan

NINKKA

## Model: FD60-DC20ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### 24 Inch Drum Fan

| | |
|---|---|
| Size | 24 INCH |
| Rated power | 110W |
| Rated voltage(V) | 200-240V/100-120V |
| Oscillation Degree | 360° |
| Control panel | touched control panel |
| Function | 6 wind speeds, 9h timer, strong wind mode |

| | |
|---|---|
| Gross weight | 14.5kg |
| Net weight | 12.5kg |
| Packing size | 76.5*24*78cm |

| | |
|---|---|
| 20 GP capacity | 195 |
| 40 GP capacity | 411 |
| 40 HC capacity | 459 |

RF REMOTE CONTROL

## Model: FD75-DC20ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### 30 Inch Drum Fan

| | |
|---|---|
| Size | 30 inch |
| Rated power | 150W |
| Rated voltage(V) | 200-240V/100-120V |
| Oscillation Degree | 360° |
| Control panel | touched control panel |
| Fan mode | 6 wind speeds, 9h timer, strong wind mode |

| | |
|---|---|
| Gross weight | 16.9kg |
| Net weight | 14.9kg |
| Packing size | 94*24*96cm |

| | |
|---|---|
| 20 GP capacity | 132 |
| 40 GP capacity | 272 |
| 40 HC capacity | 296 |

RF REMOTE CONTROL

Smart DC Waterproof Fan Series

CE RoHS COMPLIANT ERP Energy-related Products RED

# DC Frequency Conversion Fan

NINKKA

## Model: FD90-DC20ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### 36 Inch Drum Fan

| | |
|---|---|
| Size | 36 inch |
| Rated power | 150W |
| Rated voltage(V) | 200-240V/100-120V |
| Oscillation Degree | 360° |
| Control panel | touched control panel |
| Function | 6 wind speeds, 9h timer, strong wind mode |

| | |
|---|---|
| Gross weight | 23.4kg |
| Net weight | 21.9kg |
| Packing size | 102.5*32*101cm |

| | |
|---|---|
| 20 GP capacity | 92 |
| 40 GP capacity | 192 |
| 40 HC capacity | 206 |

RF REMOTE CONTROL

## Model: FD105-DC20ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### 42 Inch Drum Fan

| | |
|---|---|
| Size | 42 inch |
| Rated power | 220W |
| Rated voltage(V) | 200-240V/100-120V |
| Oscillation Degree | 360° |
| Control panel | touched control panel |
| Function | 6 wind speeds, 9h timer, strong wind mode |

| | |
|---|---|
| Gross weight | 38kg |
| Net weight | 36kg |
| Packing size | 102.5*32*101cm |

| | |
|---|---|
| 20 GP capacity | 64 |
| 40 GP capacity | 136 |
| 40 HC capacity | 156 |

RF REMOTE CONTROL

Smart DC Waterproof Fan Series

CE RoHS COMPLIANT ERP Energy-related Products RED

# DC Frequency Conversion Fan

NAKKA

## Model: FM65-DC19ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### Performance

**Grill** 26 inch 12 lines strong grill
**Blade** 26 inch 3 blades Aluminum design ( lowest noise , max air volume)
**Power Cable** 3*0.75mm 100% copper power line(The length of the power cord is 1.8m)

| | |
|---|---|
| Size | 26 INCH (650mm) |
| Rated power | 210W |
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 314.5m³/min |
| Fan sound power level | 72db |
| Left&right air supply angle | 75° |
| Up&down air supply angle | 40° |
| Height | 1750mm |

| | |
|---|---|
| Gross weight | 23 kg |
| Net weight | 21.93 kg |
| Packing size | 113*19*11cm<br>56*40*35cm<br>72*12*72cm |
| 20 GP capacity | 190 PCS |
| 40 GP capacity | 390 PCS |
| 40 HC capacity | 430 PCS |

RF REMOTE CONTROL

## Model: FM75-DC19ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

### Performance

**Grill** 30 inch 12 lines strong grill
**Blade** 30 inch 3 blades Aluminum design ( lowest noise , max air volume)
**Power Cable** 3*0.75mm 100% copper power line(The length of the power cord is 1.8m)

| | |
|---|---|
| Size | 30 INCH (750mm) |
| Rated power | 210W |
| Rated voltage(V) | 200-240V/100-120V |
| Maximum wind volume | 314.5m³/min |
| Fan sound power level | 72db |
| Left&right air supply angle | 75° |
| Up&down air supply angle | 40° |
| Height | 1800mm |

| | |
|---|---|
| Gross weight | 24 kg |
| Net weight | 22.93 kg |
| Packing size | 113*19*11cm<br>56*40*35cm<br>82*12*82cm |
| 20 GP capacity | 165 PCS |
| 40 GP capacity | 340 PCS |
| 40 HC capacity | 385 PCS |

RF REMOTE CONTROL

Smart DC Household Fan Series

CE RoHS COMPLIANT ERP Energy-related Products RED

# DC Frequency Conversion Fan

NAKKA

## Model: FW40-DC22ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

| | |
|---|---|
| Size | 16 INCH |
| Rated power | 28W |
| Rated voltage(V) | 200-240V/100-120V |
| Control panel | touched control panel |
| Fan mode | 9 wind speeds, 9h timer, strong wind mode, sleep mode, natural wind mode |
| Gross weight | 4.13 kg |
| Net weight | 3.13 kg |
| Packing size | 49*17*58cm |

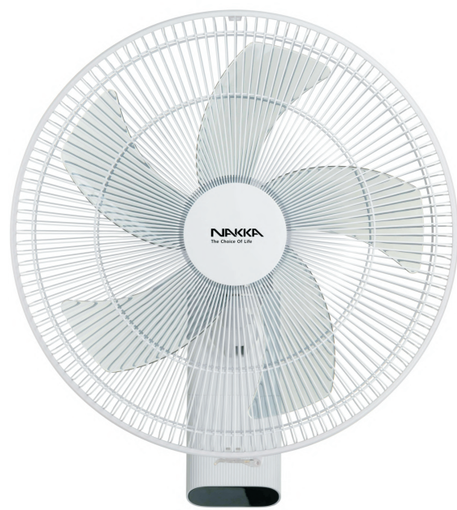


| | |
|---|---|
| 20 GP capacity | 626 |
| 40 GP capacity | 1290 |
| 40 HC capacity | 1664 |

**INFRARED**

REMOTE CONTROL

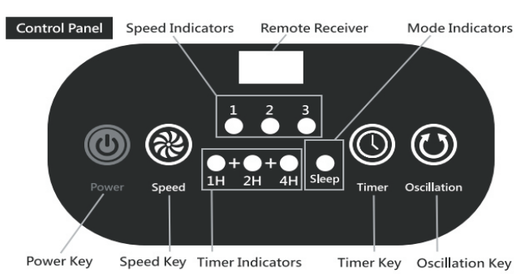


## Model: FS40-DC22ARL

DC Motor | Strong wind | Mute | Remote Control | Energy conservation | Safety Refinements

| | |
|---|---|
| Size | 16 INCH |
| Rated power | 30W |
| Rated voltage(V) | 200-240V/100-120V |
| Control panel | touched control panel |
| Fan mode | 9 wind speeds, 9h timer, strong wind mode, natural wind mode |
| Maximum wind volume | 68m³/s |

| | |
|---|---|
| Gross weight | 6.62kg |
| Net weight | 5.73kg |
| Packing size | 59*16*46.5cm |
| Rotate speed | 1-550rpm 4-900rpm<br>2-700rmp 5-1050rpm<br>3-750rpm 6-1200rpm |
| 20 GP capacity | 600 |
| 40 GP capacity | 1420 |
| 40 HC capacity | 1500 |

**INFRARED**

REMOTE CONTROL